

INSTRUMENT APPROACH CHART - ICAO



AERODROME ELEV 603 - 21 hPa
THR RWY 30 ELEV 603 - 21 hPa
OCH RELATED TO THR RWY 30 ELEV
CIRCLING OCH RELATED TO AD ELEV

TWR 133.600
125.500
362.550
121.500
243.000


ATIS 127.205

PLOVDIV

ILS x or LOC x
RWY 30

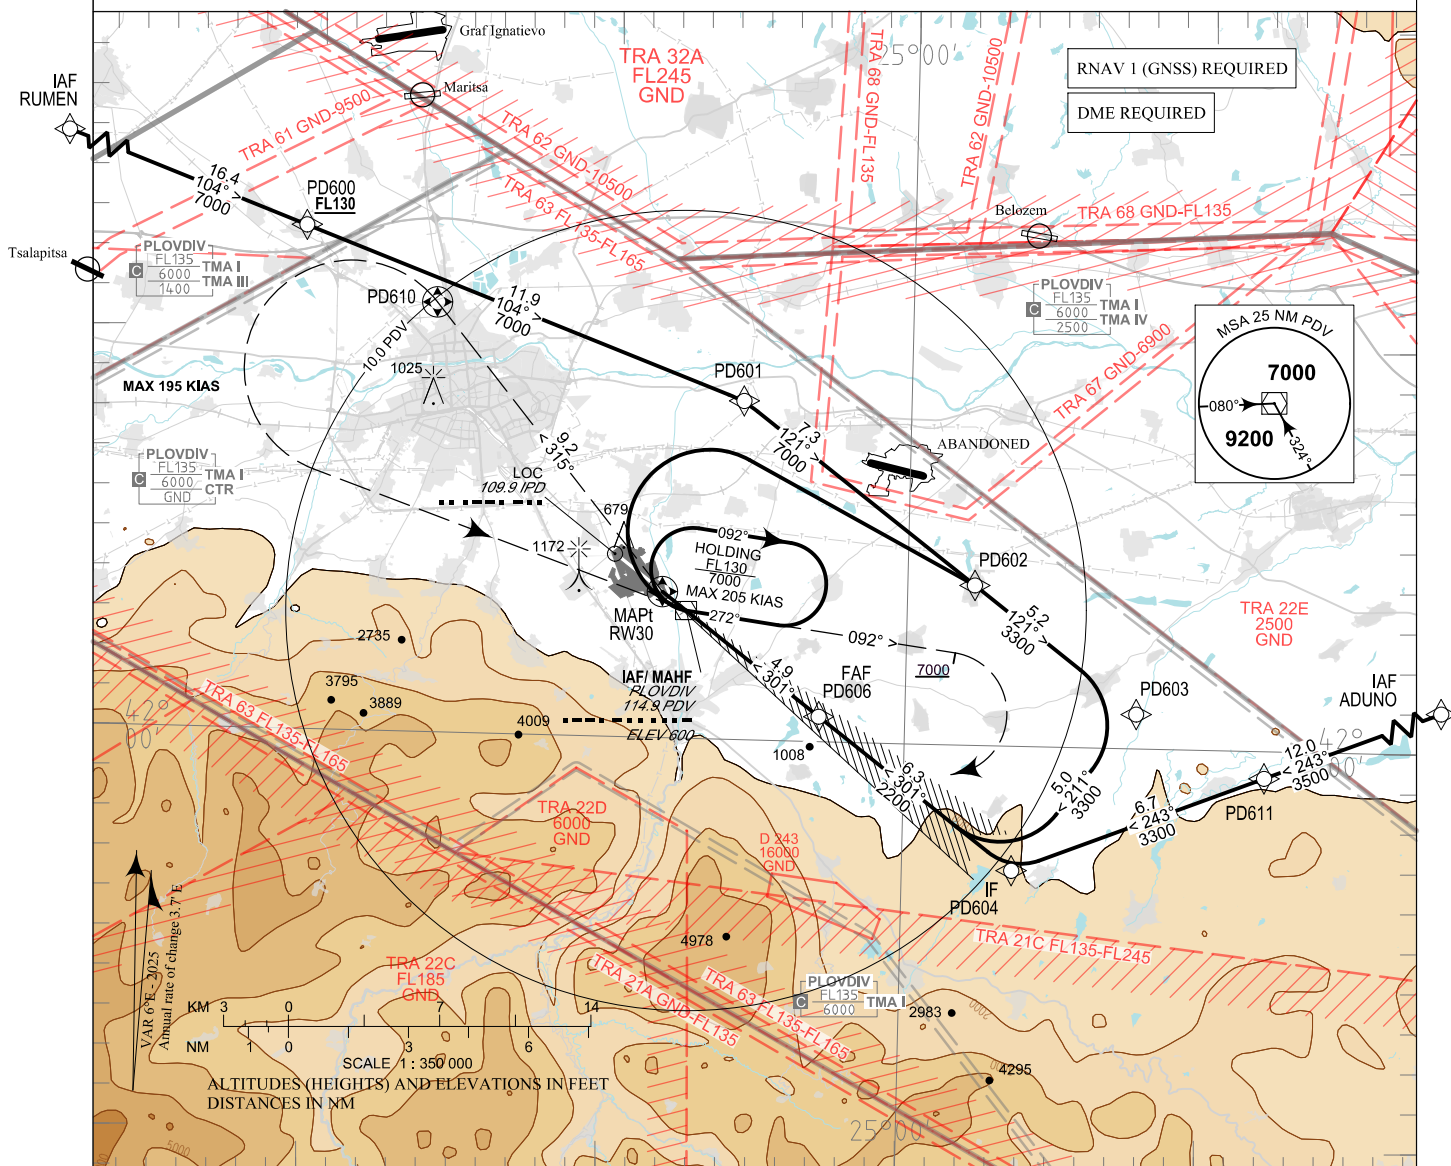

TRANSITION ALTITUDE
10500 FT

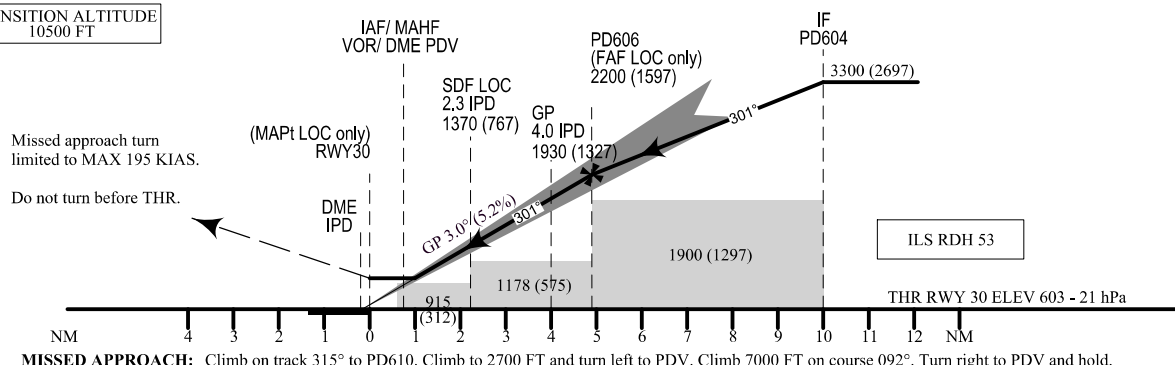

MISSED APPROACH: Climb on track 315° to PD610. Climb to 2700 FT and turn left to PDV. Climb 7000 FT on course 092°. Turn right to PDV and hold.

Missed APCH gradient	OCA (OCH)	A	B	C	D
3.5%	CAT I	860 (257)	872 (269)	880 (277)	891 (288)
	CAT I	1029 (426)	1041 (438)	1049 (446)	1060 (457)
2.5%	LOC/DME		970 (370)		
	Circling	1010 (410)	1110 (510)	1410 (810)	

Circling NE of AD only

DIST IPD NM	4.0	3.0	2.0	1.0
ALT (HGT) ft	1930 (1330)	1610 (1010)	1300 (690)	980 (380)

DME IPD reads ZERO at THR 30

GS	kt	60	80	100	120	140	160	180
FAF - MAPt 4.3 NM	min:sec	4:18	3:14	2:35	2:09	1:51	1:37	1:26
Rate of descent	ft/min	316	421	527	632	737	843	948

Timing is not authorized for defining MAPt

Instrument approach procedures

P/T	WPT ID	Flyover	Track MAG (GEO)	DIST NM	Turn Direction	Speed KT	ALT/FL FT	Additional Requirements
From IAF RUMEN								
IF	RUMEN / IAF	-	-	-	-	-	-	-
TF	PD600	-	104°(110.2°T)	16.4	-	-	F130+	-
TF	PD601	-	104°(110.5°T)	11.9	Right	-	-	-
TF	PD602	-	121°(127.3°T)	7.3	-	-	A7000+	-
TF	PD603	-	121°(127.4°T)	5.2	Right	-	-	-
TF	PD604 / IF	-	211°(217.4°T)	5.0	Right	190-	A3300+	-
TF	PD606 / FAF	-	301°(307.4°T)	6.3	-	-	A2200+	-
TF	RW30/MAPt	Yes	301°(307.3°T)	4.9	Right	-	-	-
TF	PD610	Yes	315°(320.8°T)	9.2	-	-	-	-
CA	-	-	315°(320.8°T)	-	Left	195-	A2700+	-
DF	PDV	-	-	-	-	-	-	-
CA	-	-	092°(097.5°T)	-	-	-	A7000+	-
DF	PDV	-	-	-	Right	-	-	-
From IAF ADUNO								
IF	ADUNO / IAF	-	-	-	-	-	-	-
TF	PD611	-	243°(249.0°T)	12.0	-	-	A3500+	-
TF	PD604 / IF	-	243°(248.8°T)	6.7	Right	190-	A3300+	-
TF	PD606 / FAF	-	301°(307.4°T)	6.3	-	-	A2200+	-
TF	RW30/MAPt	Yes	301°(307.3°T)	4.9	Right	-	-	-
TF	PD610	Yes	315°(320.8°T)	9.2	-	-	-	-
CA	-	-	315°(320.8°T)	-	Left	195-	A2700+	-
DF	PDV	-	-	-	-	-	-	-
CA	-	-	092°(097.5°T)	-	-	-	A7000+	-
DF	PDV	-	-	-	Right	-	-	-

P/T	WPT ID	Flyover	Track MAG (GEO)	DIST NM	Turn Direction	Speed KT	ALT/FL FT	Additional Requirements
From IAF PDV								
IF	PDV / IAF	Yes	-	-	-	-	-	-
DF	PD602	-	-	-	Right	-	A7000+	-
TF	PD603	-	121°(127.4°T)	5.2	Right	-	-	-
TF	PD604 / IF	-	211°(217.4°T)	5.0	Right	190-	A3300+	-
TF	PD606 / FAF	-	301°(307.4°T)	6.3	-	-	A2200+	-
TF	RW30/MAPt	Yes	301°(307.3°T)	4.9	Right	-	-	-
TF	PD610	Yes	315°(320.8°T)	9.2	-	-	-	-
CA	-	-	315°(320.8°T)	-	Left	195-	A2700+	-
DF	PDV	-	-	-	-	-	-	-
CA	-	-	092°(097.5°T)	-	-	-	A7000+	-
DF	PDV	-	-	-	Right	-	-	-

Holding

P/T	WPT ID	Flyover	Track MAG (GEO)	Time	Turn Direction	Speed KT	ALT / FL FT	Additional Requirements
HM	PDV	Yes	272°(277.8°T)	1min	Right	205-	A7000+	-

See page LBDP AD 2 - 61.1 for waypoint coordinates

INTENTIONALLY LEFT BLANK