

Aeronautical Information Services

Aeronautical Chart Users' Guide

Effective as of 20 February 2025

TABLE OF CONTENTS

INTRODUCTION	TABLE OF CONTENTS	3
EFFECTIVE DATE OF CHART USERS' GUIDE AND UPDATES	INTRODUCTION	7
COLOR VARIATION 7 REPORTING CHART DISCREPANCIES 7 WHAT'S NEW? 9 VFR CHARTS 9 IFR ENROUTE CHARTS 9 TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRSPACE 15 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 LOHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 ARDIO AIDS TO NAVIGATION 26 ANAIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRSPACE INFORMATION 43 AIRSPACE INFORMATION 43 </td <td>KEEP YOUR CHARTS CURRENT</td> <td>7</td>	KEEP YOUR CHARTS CURRENT	7
REPORTING CHART DISCREPANCIES 7 WHAT'S NEW? 9 VFR CHARTS 9 IFR ENROUTE CHARTS 9 TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES (TERRAIN) AND PEACE 21 LOB AIR SPACE 21 LOB AIR SPACE 21 LOB AIR SPACE 23 LAND AND TERMINAL AREA CHARTS 23 AIR SPACE INFORMATION 26 LAND AIR SPACE INFORMATION 43 LAND AIR SPACE INFORMATION <	EFFECTIVE DATE OF CHART USERS' GUIDE AND UPDATES	7
WHAT'S NEW? 9 VFR CHARTS 9 IFR ENROUTE CHARTS 9 TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRSPACE INFORMATION 43	COLOR VARIATION	7
VFR CHARTS 9 IFR ENROUTE CHARTS 9 TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 AIRPORTS 23 AIRPORTS 23 AIRPORTS 23 AURY OF AND TERMINAL AREA CHARTS 23 AIRPORTS 23 AIRPORTS 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRPORTS 43 <td>REPORTING CHART DISCREPANCIES</td> <td>7</td>	REPORTING CHART DISCREPANCIES	7
IFR ENROUTE CHARTS 9 TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRPORTS 43 AIRPORTS 43 AIRPORTS 43 ABOLIO AIDS TO NAVIGATION 43	WHAT'S NEW?	9
TERMINAL PROCEDURE PUBLICATION (TPP) 9 EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRSPACE INFORMATION		
EXPLANATION OF VFR TERMS AND SYMBOLS 11 WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 25 AIRSPACE INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRPORTS 43 ARDIO AIDS TO NAVIGATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 43 AIRSPACE INFORMATION 43 AIRSPA		
WATER FEATURES (HYDROGRAPHY) 11 LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRSPACE INFORMATION 43 AIRSPACE INFORMATION 43 AIRSPACE INFORMATION 44 VAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48	TERMINAL PROCEDURE PUBLICATION (TPP)	9
LAND FEATURES (TERRAIN) AND OBSTRUCTIONS 11 LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 VFR TYWAY PLANNING CHARTS 48 BOUNDARIES 48 HYDROGRAPHY	EXPLANATION OF VFR TERMS AND SYMBOLS	11
LAND FEATURES - MOUNTAIN PASSES 14 RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
RADIO AIDS TO NAVIGATION 15 AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
AIRPORTS 15 AIRSPACE 17 FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
AIRSPACE		
FOREIGN AREAS 20 TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48	AIRPORTS	15
TERMINAL AREA CHART (TAC) COVERAGE 21 INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 AIRPORTS 43 ARADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
INSET AND SPECIAL CHART COVERAGE 21 CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
CHART TABULATIONS 21 VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
VFR SECTIONAL AND TERMINAL AREA CHARTS 23 AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
AIRPORTS 23 RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48	CHART TABULATIONS	21
RADIO AIDS TO NAVIGATION 25 AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
AIRSPACE INFORMATION 26 NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		_
NAVIGATIONAL AND PROCEDURAL INFORMATION 32 CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
CULTURE 34 HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		_
HYDROGRAPHY 37 RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
RELIEF 40 VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
VFR FLYWAY PLANNING CHARTS 43 GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
GENERAL INFORMATION 43 AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48	KELIEF	40
AIRPORTS 43 RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		_
RADIO AIDS TO NAVIGATION 43 AIRSPACE INFORMATION 44 NAVIGATIONAL AND PROCEDURAL INFORMATION 47 CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
AIRSPACE INFORMATION		
NAVIGATIONAL AND PROCEDURAL INFORMATION		
CULTURE 48 BOUNDARIES 48 HYDROGRAPHY 48		
BOUNDARIES		
HYDROGRAPHY48		
		_

TABLE OF CONTENTS

HELICOPTER ROUTE CHARTS	49
GENERAL INFORMATION	
AIRPORTS	
RADIO AIDS TO NAVIGATION	
AIRSPACE INFORMATION	
NAVIGATIONAL AND PROCEDURAL INFORMATION	
CULTURE	55
CARIBBEAN VFR AERONAUTICAL CHARTS (CAC)	57
AIRSPACE	59
EXPLANATION OF IFR ENROUTE TERMS	61
AIRPORTS	
RADIO AIDS TO NAVIGATION	
AIRSPACE INFORMATION	
INSTRUMENT AIRWAYS	
FOREIGN AREAS	
TERRAIN CONTOURS ON AREA CHARTS	71
AIRPORTS	73
IFR ENROUTE LOW / HIGH ALTITUDE SYMBOLS (U.S., PA	CIFIC AND ALASKA
CHARTS)	
RADIO AIDS TO NAVIGATION	
AIRSPACE INFORMATION	79
NAVIGATIONAL AND PROCEDURAL INFORMATION	92
CULTURE	
HYDROGRAPHY	
TOPOGRAPHY	93
U.S. TERMINAL PROCEDURES PUBLICATION	95
EXPLANATION OF TPP TERMS AND SYMBOLS	
INSTRUMENT APPROACH PROCEDURE CHART	96
PLANVIEW	
MISSED APPROACH INFORMATION	
PROFILE VIEW	
LANDING MINIMUMS	
AIRPORT SKETCH	
AIRPORT DIAGRAMS	
DEPARTURE PROCEDURES (DPs)STANDARD TERMINAL ARRIVAL (STARs) CHARTS	
CHARTED VISUAL FLIGHT PROCEDURE (CVFP) CHARTS	
OTHER VIOLACT LIGHT I ROOLDONE (OVIT) OHARTS	124
U.S. TERMINAL PROCEDURES PUBLICATION SYMBOLS.	
GENERAL INFORMATION	
PLANVIEW SYMBOLS	125

TABLE OF CONTENTS

PROFILE VIEW	127
STANDARD TERMINAL ARRIVAL (STAR) CHARTS	128
DEPARTURE PROCEDURE (DP) CHARTS	129
AIRPORT DIAGRAM/AIRPORT SKETCH	130
APPROACH LIGHTING SYSTEM	131
REFERENCES	133
ABBREVIATIONS	135

INTRODUCTION

This Chart Users' Guide is an introduction to the Federal Aviation Administration's (FAA) aeronautical charts and publications. It is useful to new pilots as a learning aid, and to experienced pilots as a quick reference guide.

The FAA is the source for all data and information utilized in the publishing of aeronautical charts through authorized publishers for each stage of Visual Flight Rules (VFR) and Instrument Flight Rules (IFR) air navigation including training, planning, departures, enroute (for low and high altitudes), approaches, and taxiing charts. Digital charts are available online at:

- VFR Charts
- IFR Charts
- Terminal Procedures Publication
- Chart Supplements

Paper copies of the charts are available through an FAA Approved Print Provider. A complete list of current providers is available at http://www.faa.gov/air-traffic/flight-info/aeronav/print-providers/.

The FAA Aeronautical Information Manual (AIM) Pilot/Controller Glossary defines all terms and abbreviations used throughout this publication. Unless otherwise indicated, miles are nautical miles (NM), altitudes indicate feet above Mean Sea Level (MSL), and times used are Coordinated Universal Time (UTC).

Notices to Airmen (NOTAMs) alert pilots to time-critical aeronautical information that is either temporary or not sufficiently known in advance to permit publication on aeronautical charts or in other operational publications. Pilots can access NOTAM information via Flight Service Stations (FSS) or online via NOTAM Search at https://notams.aim.faa.gov/notam-search/.

In addition to NOTAMs, the Safety Alerts/Charting Notices page of the Aeronautical Information Services website is also useful to pilots.

KEEP YOUR CHARTS CURRENT

Aeronautical information changes rapidly, so it is important that pilots check the effective dates on each aeronautical chart and publication. To avoid danger, it is important to always use current editions and discard obsolete charts and publications.

To confirm that a chart or publication is current, refer to the next scheduled edition date printed on the cover. Pilots should also check NOTAMs for important updates between chart and publication cycles that are essential for safe flight.

EFFECTIVE DATE OF CHART USERS' GUIDE AND UPDATES

All information in this guide is effective as of **20 February 2025**. All graphics used in this guide are for educational purposes. Chart symbology may not be to scale. Please do not use them for flight navigation.

The Chart Users' Guide is published in accordance with the 56-day aeronautical chart product schedule.

COLOR VARIATION

Although the digital files are compiled in accordance with charting specifications, the final product may vary slightly in appearance due to differences in printing techniques/processes and/or digital display techniques.

REPORTING CHART DISCREPANCIES

Your experience as a pilot is valuable and your feedback is important. We make every effort to display accurate information on all FAA charts and publications, so we appreciate your input. Please notify us concerning any requests for changes, or potential discrepancies you see while using our charts and related products.

FAA, Aeronautical Information Services 1305 East-West Highway SSMC4, Room 3424 Silver Spring, MD 20910-3281

Telephone Toll-Free 1-800-638-8972
Aeronautical Inquires: https://www.faa.gov/air_traf-fic/flight_info/aeronav/aero_data/Aeronautical_Inquiries/

WHAT'S NEW?

Update as of 20 February 2025

The following charting items have been added to the Chart Users' Guide since the Guide was last published on 26 December 2024:

VFR CHARTS										
No Significant Changes Applied										
	 _	 _	_	_	 _	_	_	_	_	_
IFR ENROUTE CHARTS										
No Significant Changes Applied										
	 _	 _	_	_	 _	_	_	_	_	_

TERMINAL PROCEDURE PUBLICATION (TPP)

No Significant Changes Applied

EXPLANATION OF VFR TERMS AND SYMBOLS

This chapter covers the Sectional Aeronautical Chart (Sectional). These charts include the most current data at a scale of (1:500,000), which is large enough to be read easily by pilots flying by sight under Visual Flight Rules. Sectionals are named after a major city within its area of coverage.

The chart legend includes aeronautical symbols and information about drainage, terrain, the contour of the land, and elevation. You can learn to identify aeronautical, topographical, and obstruction symbols (such as radio and television towers) by using the legend.

A brief description next to a small black square indicates the exact location for many of the landmarks easily recognized from the air, such as stadiums, pumping stations, refineries, etc. A small black open circle with descriptive type indicates oil, gas or mineral wells. A small black circle with descriptive type indicates water, oil or gas tanks. The scale for some items may be increased to make them easier to read on the chart.

Aeronautical Information Services' charts are prepared in accordance with specifications of the Interagency Air Committee (IAC) and are approved by representatives of the Federal Aviation Administration (FAA) and the Department of Defense (DoD).

WATER FEATURES (HYDROGRAPHY)



Water features are depicted using two tones of blue, and are considered either "Open Water" or "Inland Water." "Open Water," a lighter blue tone, shows the shoreline limitations of all coastal water features at the average (mean) high water levels for oceans and seas. Light blue also represents the connecting waters like bays, gulfs, sounds and large estuaries.

Exceptionally large lakes like the Great Lakes, Great Salt Lake, and Lake Okeechobee, etc., are considered Open Water features. The Open Water tone extends inland as far as necessary to adjoin the darker blue "Inland Water" tones. All other bodies of water are marked as "Inland Water" in the darker blue tone.

LAND FEATURES (TERRAIN) AND OBSTRUCTIONS

The elevation and configuration of the Earth's surface is important to pilots. Our Aeronautical Information Specialists are devoted to showing the contour of the earth and any obstructions clearly and accurately on our charts. We use five different techniques: contour lines, shaded relief, color tints, obstruction symbols, and Maximum Elevation Figures (MEF).

- 1. Contour lines join points of equal elevation. On Sectionals, basic contours are spaced at 500' intervals. Intermediate contours are typically at 250' intervals in moderately level or gently rolling areas. Auxiliary contours at 50', 100', 125', or 150' intervals occasionally show smaller relief features in areas of relatively low relief. The pattern of these lines and their spacing gives the pilot a visual concept of the terrain. Widely spaced contours represent gentle slopes, while closely spaced contours represent steep slopes.
- 2. Shaded relief shows how terrain may appear from the air. Shadows are shown as if light is coming from the northwest, because studies have shown that our visual perception has been conditioned to this view.



3. Different color tints show bands of elevation relative to sea level. These colors range from light green for the lower elevations, to dark brown for the higher elevations.

19633

GLACIER

12000

9000

7000 -

5000 -

3000

2000

1000

Sea Level

-228

4. Obstruction symbols show man made vertical features that could affect safe navigation. The FAA maintains a database of obstacles. Aeronautical Specialists evaluate each obstacle based on charting specifications before adding it to a a visual chart. When a Specialist is not able to verify the position or elevation of an obstacle, it is marked UC, meaning it is "under construction" or being reported, but has not been verified.

The FAA uses a Digital Obstacle File (DOF) to collect and disseminate data. Because land and obstructions frequently change, the source data on obstructions and terrain is occasionally incomplete or not accurate enough for use in aeronautical publications. For example, when the FAA receives notification about an obstruction, and there is insufficient detail to determine its position and elevation, the FAA Flight Edit Program conducts an investigation.

The Flight Edit crew visually verifies the cultural, topographic, and obstacle data. Charts are generally flight-checked every four years. This review includes checking for any obstruction that has been recently built, altered, or dismantled without proper notification.



Sectional Charts and Terminal Area (TACs) typically show man-made obstacles extending more than 200' Above Ground Level (AGL), or more than 299' AGL in yellow city tint. Obstacles may be lit or unlit. Features considered to be hazardous obstacles to low-level flight are; smokestacks, tanks, factories, lookout towers, antennas, and wind turbines, etc.



Man-made features used by FAA Air Traffic Control as checkpoints use a graphic symbol shown in black with the required elevation data in blue. The elevation of the top of the obstacle above Mean Sea Level (MSL) and the height of the structure (AGL) is also indicated (when known or can be reliably determined by a Specialist). The AGL height is in parentheses below the MSL elevation. In extremely congested areas, the FAA typically omits the AGL values to avoid confusion.



Whenever possible, the FAA depicts specific obstacles on charts. However, in high-density areas like city complexes, only the highest obstacle is represented on the chart using the group obstacle symbol to maximize legibility.

5000 (1500) UC

If space is available the AGL height of the obstruction is shown in parentheses.

Obstacles under construction are indicated by placing the letters UC adjacent to the obstacle type.





Obstacles with high-intensity strobe lighting systems may operate part-time or by proximity activation and are shown as follows:



Concentrated obstructions of wind turbine farms shall be portrayed by an overlying hatched area and dotted outline to represent the approximate parameters of the farm. One or more single turbine symbols will populate the farm. A boxed elevation figure representing the MSL elevation of the highest wind turbine within the area shall be placed inside the farm or, if space is limited, just outside. Pilots are reminded that wind turbine blades and/or blade tips are not lighted. Wind turbine obstruction lights are located on top of the nacelle (generator) at the hub of wind turbines, which in some cases can be 200-300' below the rotating blade tips.

5. The Maximum Elevation Figure (MEF) represents the highest elevation within a quadrant, including terrain and other vertical obstacles (towers, trees, etc.). A quadrant on Sectionals is the area bounded by ticked lines dividing each 30 minutes of latitude and each 30 minutes of longitude. MEF figures are rounded up to the nearest 100' value and the last two digits of the number are not shown.

125
In this example the MEF represents 12,500'.

MEFs over land and open water areas are used in areas containing man-made obstacles such as oil rigs.

In the determination of MEFs, the FAA uses extreme care to calculate the values based on the existing elevation data shown on source material. Aeronautical Information Specialists use the following procedure to calculate MEFs:

MEF - Man-made Obstacle

When a man-made obstacle is more than 200' above the highest terrain within the quadrant:

- 1. Determine the elevation of the top of the obstacle above MSL.
- 2. Add the possible vertical error of the source material to the above figure (100' or 1/2 contour interval when interval on source exceeds 200'. U.S. Geological Survey Quadrangle Maps with contour intervals as small as 10' are normally used).
- 3. Round the resultant figure up to the next higher hundred-foot level.

Example:

Elevation of obstacle top (MSL)	2649
Possible obstacle error	+100
equals	2749
Raise to the following 100' level	2800
Maximum Elevation Figure (MEF)	28



MEF - Natural Terrain Feature or Natural Vertical Obstacle

When a natural terrain feature or natural vertical obstacle (e.g. a tree) is the highest feature within the quadrangle:

- 1. Determine the elevation of the feature.
- 2. Add the possible vertical error of the source to the above figure (100' or 1/2 the contour interval when interval on source exceeds 200').
- Add a 200' allowance for uncharted natural or manmade obstacles. Chart specifications don't require the portrayal of obstacles below minimum height.
- Round the figure up to the next higher hundredfoot level.


Example:

Possible vertical error	+100
Obstacle Allowance	+200
equals	13461
Raise to the following 100' level	13500

Maximum Elevation Figure (MEF)

Elevation of obstacle top (MSL)


135

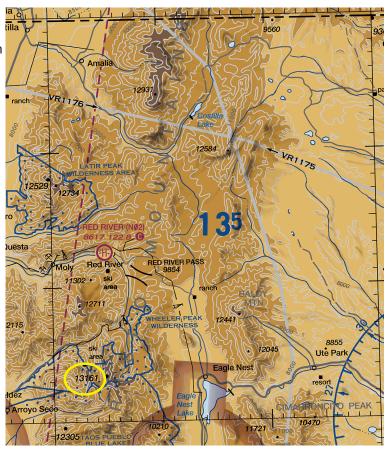

Pilots should be aware that while the MEF is based on the best information available to the Specialist, the figures are not verified by field surveys. Also, users should consult the Aeronautical Information Services website to ensure that your chart has the latest MEF data available.

LAND FEATURES - MOUNTAIN PASSES


The Mountain Pass symbol odes not indicate a recommended route or direction of flight, and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes. For high-traffic mountain passes, VFR Checkpoints may be provided to increase situational awareness by indicating key landmarks inside confined terrain. A collocated VFR Waypoint and Checkpoint may be provided to assist with identifying natural entry points for commonly flown mountain passes.

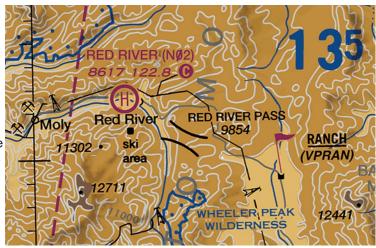

RADIO AIDS TO NAVIGATION

On VFR Charts, information about radio aids to navigation (NAVAID) are boxed, as illustrated. Duplication of data is


avoided. When two or more radio aids in a general area have the same name with different frequencies, Tactical Air Navigation (TACAN) channel numbers, or identification letters, and no misinterpretation can result, the name of the radio aid may be indicated only once within the identification box. Very High Frequency/Ultra High Frequency (VHF/UHF) NAVAID names and identification boxes (shown in blue) take precedence. Only

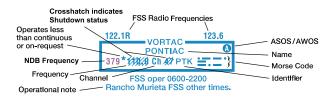

those items that differ (e.g., frequency, Morse Code) are repeated in the box in the appropriate color. The choice of separate or combined boxes is made in each case on the basis of economy of space and clear identification of the radio aids.

A NAVAID that is physically located on an airport may not always be represented as a typical NAVAID symbol. A small open circle indicates the NAVAID location when collocated with an airport icon.

The type of NAVAID will be identified by: "VOR," (VHF Omni-Directional Range) "VORTAC" (VOR Tactical Aircraft Control), "VOR-DME," (VOR-Distance Measuring Equipment) or "DME" (Distance Measuring Equipment) positioned on and breaking the top line of the NAVAID box.



DMEs are shown without the compass rose.

AIRPORTS

Airports in the following categories are charted as indicated (additional symbols are shown later in this Section). Public use airports:



Hard-surfaced runways greater than 8069' or some multiple runways less than 8069'



Hard-surfaced runways 1500' to 8069'



Other than hard-surfaced runways



Seaplane bases

Military airports:

0



Other than hard-surfaced runways

Foreign airports:



Hard-surfaced runways are depicted the same as public-use airports.

U.S. military airports are identified by abbreviations such as AAF (Army Air Field), AFB (Air Force Base), MCAS (Marine Corps Air Station), NAS (Naval Air Station), NAV (Naval Air Facility), and NAAS (Naval Auxiliary Air Station).

Fuel Available:



Fuel availability indicated by use of tick marks around the basic airport symbol. Consult Chart Supplement for details and availability.

Other airports with or without fuel:












Airports are plotted in their true geographic position unless the symbol conflicts with a NAVAID at the same location. In such cases, the airport symbol will be displaced, but the relationship between the airport and the NAVAID will be retained. When a waypoint is collocated with a towered airport, the waypoint symbol will not be charted and the waypoint name followed by (WP) will be shown leadered to the waypoint true location. When depicting a seaplane base, the eye of the anchor symbol will be charted as close to the docking area as possible, with the remainder of the symbol in the water.

Airports are identified by their official FAA designated name.

The elevation of an airport is the highest point on the usable portion of the landing areas. Runway length is the length of the longest active runway, including displaced thresholds and excluding overruns. Runway length is shown to the nearest 100', using 70 as the rounding point; a runway 8070' in length is charted as 81, while a runway 8069' in length is charted as 80. If an airport has waterways, it will be indicated by a seaplane base symbol and additional elevation, lighting, and length information under primary airport information.



Flight Service Station on field	FSS	Elevation in feet	285
Airports where fixed wing special VFR operations are prohibited (shown above airport name) FAR 91	NO SVFR	Lighting in operation Sunset to Sunrise	L
Indicates FAR 93 Special Air Traffic Rules and Airport Traffic Pattern		Lighting limitations exist; refer to Chart Supplement	*L
Location Identifier	(NAM)	Length of longest runway in hundreds of feet; usable length may be less	72
ICAO Location Identifier	(PNAM)	Aeronautical advisory station	122.95
Control Tower (CT) - primary frequency	CT - 118.3	Runways with Right Traffic Patterns (public use)	RP 23,34
Star indicates operation part-time. See tower frequencies tabulation for hours of operation	*	See Chart Supplement	*RP
Follows the Common Traffic Advisory Frequency (CTAF)	0	VFR Advisory Service Shown when ATIS is not available and frequency is other than the primary CT frequency	VFR Advsy 125.0
Automatic Terminal Information Services	ATIS 123.8	Weather Camera (Alaska)	WX CAM
Automatic Flight Information Service	AFIS 135.2	Airport of Entry	AOE
Automated Surface Weather Observing Systems; shown when full-time ATIS is not available	ASOS/AWOS 135.42	When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.	

Airports with Control Towers (CT) and their related data are shown in blue. All other airports and their related data are shown in magenta. The L symbol indicates that runway lights are on from dusk to dawn. *L indicates that the pilot must consult the Chart Supplement to determine runway lighting limitations, such as: available on request (by radio-call, letter, phone, etc), part-time lighting, or pilot/airport controlled lighting. Lighting codes refer to runway edge lights. The lighted runway may not be the longest runway available, and lights may not be illuminated along the full length of the runway. The Chart Supplement has a detailed description of airport and air navigation lighting aids for each airport. A dash represents no runway edge lights.

The symbol $\stackrel{\star}{\times}$ indicates the existence of a rotating or flashing airport beacon operating from dusk to dawn. The Aeronautical Information Manual (AIM) thoroughly explains the types and uses of airport lighting aids.

Right traffic information is shown using the abbreviation 'RP' for right pattern, followed by the appropriate runway number(s) (RP 18). Special conditions or restrictions to the right pattern are indicated by the use of an asterisk (*RP) to direct the pilot to the Chart Supplement for special instructions and/or restrictions.

The type "OBJECTIONABLE" associated with an airport symbol indicates that an objectionable airspace determination has been made for the airport per FAA JO 7400.2 Section 4, Airport Charting and Publication of Airport Data. Objectionable airspace determinations are based upon a number of factors including conflicting traffic patterns with another airport, hazardous runway conditions, or natural or man-made obstacles in close proximity to the landing area. FAA Regional Airports Offices are responsible for airspace determinations. Address any challenges to objectionable airspace determinations to your FAA Regional Airports Office.

AIRSPACE

CONTROLLED AIRSPACE

Controlled airspace consists of those areas where some or all aircraft may be subject to air traffic control, such as: Class A, Class B, Class C, Class D, Class E Surface (SFC) and Class E Airspace.

Class A Airspace within the United States extends from 18,000' up to FL600. While visual charts do not depict Class A, it is important to note its existence.

Class B Airspace is shown on the Sectional Aeronautical Chart (Sectional) and Terminal Area Chart (TAC). Class B MSL 90 The MSL ceiling and floor altitudes of each sector are shown in solid blue figures with the last two zeros omitted. Floors extending "upward from above" a certain altitude are preceded by a (+). Operations at and below these altitudes are outside of Class B Airspace. Radials and arcs used to define Class B are prominently shown on TACs. Detailed rules and requirements associated with the particular Class B are shown. The name by which the Class B is shown as LAS VEGAS CLASS B for example.

Class C Airspace is shown on Sectionals and TACs. The MSL ceiling and floor altitudes of each sector are Class C MSL 70 shown in solid magenta figures with the last two zeros eliminated.

Altitudes 70

A ceiling value of "T" indicates the ceiling is to, but not including, the floor of the overlying Class B airspace.

Surface.

Class C Airspace is identified by name: BURBANK CLASS C

Separate notes, enclosed in magenta boxes, give the approach control frequencies to be used by arriving VFR aircraft to establish two-way radio communication before entering the Class C (generally within 20 NM):

CTC BURBANK APP WITHIN 20 NM ON 124.6 395.9

Class C operating less than continuous is indicated by the following note: See NOTAMs/Supplement for Class C off bys

Class D Airspace is identified with a blue dashed line. Class D operating less than continuous is indicated by the following note: See NOTAMs/Supplement for Class D eff hrs

Ceilings of Class D are shown as follows: 30

A minus in front of the figure is used to indicate "from surface to, but not including..."

Class E Surface (SFC) Airspace is symbolized with a magenta dashed line. Class E (SFC) operating less than continuous is indicated by the following note: See NOTAMs/Supplement for Class E (sfc) eff hrs

Class E Airspace exists at 1200' AGL unless designated otherwise. The lateral and vertical vertical limits of all Class E, (up to, but not including 18,000') are shown by narrow bands of vignette on Sectionals and TACs.

Class E Airspace with floor 700 ft. above surface that 700 ft. above surface that Class G Airspace.

Class E Airspace with floor 700 ft. above surface that laterally abuts 1200 ft. or higher Class E Airspace Class E Airspace with floor 1200 ft. or greater above surface that laterally abuts Class G Airspace

Controlled airspace floors of 700' above the ground are defined by a magenta vignette; floors other than 700' that laterally abut uncontrolled airspace (Class G) are defined by a blue vignette; differing floors greater than 700' above the ground are annotated by a symbol and a number indicating the floor. 2400 AGL

4500 MSL

If the ceiling is less than 18,000' MSL, the value (preceded by the word "ceiling") is shown along the limits of the controlled airspace. These limits are shown with the same symbol indicated above.

UNCONTROLLED AIRSPACE

Class G Airspace within the United States extends up to 14,500' Mean Sea Level. At and above this altitude is Class E, excluding the airspace less than 1500' above the terrain and certain special use airspace areas.

SPECIAL USE AIRSPACE

Special Use Airspace (SUA) confines certain flight activities and restricts entry, or cautions other aircraft operating within specific boundaries. Except for Controlled Firing Areas, SUA areas are depicted on VFR Charts. Controlled Firing Areas are not charted because their activities are suspended immediately when spotter aircraft, radar, or ground lookout positions indicate an aircraft might be approaching the area. Nonparticipating aircraft are not required to change their flight paths. SUA areas are shown in their



entirety (within the limits of the chart), even when they overlap, adjoin, or when an area is designated within another area. The areas are identified by type and identifying name/number, and are positioned either within or immediately adjacent to the area.

* Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.

OTHER AIRSPACE AREAS

Mode C Required Airspace (from the surface to 10,000' MSL) within a 30 NM radius of the primary airport(s) for which a Class B is designated, is depicted by a solid magenta line.

Mode C is required, but not depicted for operations within and above all Class C up to 10,000' MSL.

Enroute Mode C requirements (at and above 10,000' MSL except in airspace at and below 2500' AGL) are not depicted. See FAR 91.215 and the AIM.

FAR 93 Airports and heliports under Federal Aviation Regulation 93 (FAR 93), (Special Air Traffic Rules and Airport Traffic Patterns), are shown by "boxing" the airport name.

TRUCKEE - TAHOE

FAR 91 Airports where fixed wing special visual flight rules operations are prohibited (FAR 91) are shown with the type "NO SVFR" above the airport name.

National Security Areas indicated with a broken magenta line and Special Flight Rules Areas (SFRAs) indicated with the following symbol: , consist of airspace with defined vertical and lateral dimensions established at locations where there is a requirement for increased security and safety of ground facilities. Pilots should avoid flying through these depicted areas. When necessary, flight may be temporarily prohibited.

The Washington DC Flight Restricted Zone (FRZ) is related to National Security. It is depicted using the Prohibited/ Restricted/Warning Area symbology and is located within the SFRA. It is defined as the airspace within approximately a 13 to 15 NM radius of the DCA VOR-DME. Additional requirements are levied upon aviators requesting access to operate inside the National Capital Region.

Temporary Flight Restriction (TFR) Areas Relating to National Security are indicated with a broken blue line

. A Temporary Flight Restriction (TFR) is a type of Notice to Airmen (NOTAM). A TFR defines an area where air travel is restricted due to a hazardous condition, a special event, or a general warning for the entire airspace. The text of the actual TFR contains the fine points of the restriction. It is important to note that only TFRs relating to National Security are charted.

Terminal Radar Service Areas (TRSAs) are shown in their entirety, symbolized by a screened black outline of the entire area including the various sectors within the area

The outer limit of the entire Terminal Radar Service Areas (TRSA) is a continuous screened black line. The various sectors within the TRSA are symbolized by narrower screened black lines.

Each sector altitude is identified in solid black color by the MSL ceiling and floor values of the respective sector, eliminating the last two zeros. A leader line is used when the altitude values must be positioned outside the respective sectors because of charting space limitations. The TRSA name is shown near the north position of the TRSA as follows: PALM SPRINGS TRSA. Associated frequencies are listed in a table on the chart border.

The following note appears on Helicopters, Sectionals and TACs except for Hawaiian Islands, which is different.

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route, and the route designator are depicted - route widths and altitudes are not shown.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

There are IFR (IR) and VFR (VR) routes as follows:

Route identification:

a. MTRs with no segment above 1500' are identified by four-digit numbers; e.g., VR1007, etc. These routes are generally developed to be flown under Visual Flight Rules.

b. MTRs that include one or more segments above 1500' AGL are identified by three or fewer digit numbers; e.g., IR21, etc. These routes are developed to be flown, to the maximum extent possible under Instrument Flight Rules.

Route width varies for each MTR and can extend several miles on either side of the charted MTR centerline. Detailed route width information is available in the Flight Information Publication (FLIP) AP/1B (a Department of Defense publication), or through the 56 Day NASR Subscription from the National Flight Data Center (NFDC).


Special Military Activity areas are indicated on Sectionals by an underlying IFR Military Training Route with the lateral limits of the route shown by a gray Special Use Airspace symbol. A boxed note accompanies the area. The note contains radio frequency and route identifier information to use for obtaining area activity status.

SPECIAL MILITARY ACTIVITY FOR IR850, IR851, IR852 CTC BANGOR RADIO ON 122.4 255.4 FOR ACTIVITY STATUS

The following guidance appears in the margin of applicable Sectional Charts.


SPECIAL MILITARY ACTIVITY

The chart identifies IFR Military Training Routes and Military Operations Area within which the Department of Defense conducts periodic operations involving Unmanned Aircraft Systems. These aircraft may be accompanied by military or other aircraft which provide the pilots of the Unmanned Aircraft Systems visual observation information about other aircraft operations near them. Status of these routes and areas may be obtained by contacting the FAA/DoD facility on designated frequencies along the IFR route, referencing the identifier, e.g., IR214 as depicted on this chart. The lateral limits of these specified routes are shown by the Special Use Airspace symbol. Altitudes for these route segments are also shown.



FOREIGN AREAS


The data depicted in areas outside the U.S. is skeletonized on all VFR aeronautical charts. Only major airports, NAVAIDs, and airways are charted in foreign areas in screened black. Cultural features, hydrographic information and geographic relief are depicted in subdued and different shades of gray. A note regarding the expectation of the use of foreign charts and flight information publications is depicted along the boundary.

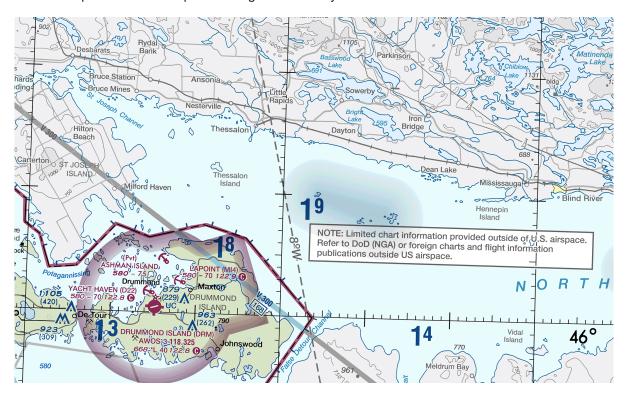

TERMINAL AREA CHART (TAC) COVERAGE

TAC coverage is shown on appropriate Sectionals by a 1/4" masked line as indicated below. Within this area pilots should use TACs, which provide greater detail. A note indicating that the area is on the TAC appears near the masked boundary line.

Pilots are encouraged to use the Los Angeles VFR Terminal Area Chart for flights at or below 10,000'



INSET AND SPECIAL CHART COVERAGE

Inset and Special Chart Coverage (.i.e., Grand Canyon Chart) is shown on appropriate Sectionals by a 1/8" masked line as indicated below. A note to this effect appears near the masked boundary line. (Additional examples shown in VFR Sectional and Terminal Charts > Navigational and Procedural Information > Chart Limits.)






CHART TABULATIONS

Airport Tower Communications are provided in a columnized tabulation for all tower-controlled airports that appear on the respective chart. Airport names are listed alphabetically. If the airport is military, the type of airfield, e.g., AAF, AFB, NAS, is shown after the airfield name. In addition to the airport name, tower operating hours, primary Very High Frequency/Ultra High Frequency (VHF/UHF) local Control Tower (CT), Ground Control (GND CON), and Automatic Terminal Information Service (ATIS) frequencies, when available, will be given. Airport Surveillance Radar (ASR) and/or Precision Approach Radar (PAR) procedures are listed when available.

Approach Control Communications are provided in a columnized tabulation listing Class B, Class C, Terminal Radar Service Areas (TRSA) and Selected Approach Control Facilities when available. Primary VHF/UHF frequencies are provided for each facility. Sectorization occurs when more than one frequency exists and/or is approach direction dependent. Availability of service hours is also provided.

Special Use Airspace (SUA): Prohibited, Restricted and Warning Areas are presented in blue and listed numerically for U.S. and other countries. A tabulation of Alert Areas (listed numerically) and Military Operations Areas (MOA) (listed alphabetically) appear on the chart in magenta. All are supplemented with altitude, time of use and the controlling agency/contact facility, and its frequency when available. Users need to be aware that a NOTAM addressing activation will NOT be issued to announce permanently listed times of use. The controlling agency will be shown when the contact facility and frequency data is unavailable.

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF tower frequency(ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF tower and ground

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available.

"MON-FRI" indicates Monday through Friday.

O/T indicates other times.

Airport Name

Frequencies (VHF/UHF)

Radar Instru Approach ava

CONTROL TOWER	OPERATES	TOWER .	GND CON	ATIS	ASR/PAR
AIRBORNE	0700 MON-1800 SAT 0600-1800 SUN	119.475	121.6	124.925	
BLUE GRASS	CONTINUOUS	119.1 257.8	121.9	126.3	
BOLTON	0730-1930	128.1	121.3 (E) 121.8 (W)		ASR/PAR
CHARLOTTESVILLE-ALBEMARLE	0600-2300	124.5 338.275	121.9 338.275	118.425	PAR
CINCINNATI/NORTHERN	CONTINUOUS	(118.3 (RWYS	121.3 (E)	134.375 (ARR)	ASR
KENTUCKY INTL	Runway dependent	18R/36L & 09/27) 118.975 360.85 (RWY 18L/36R)	121.7 (W)	135.3 (DEP)	
COX DAYTON INTL	CONTINUOUS	119.9 257.8	121.9	125.8	
EASTERN WV RGNL/ SHEPHERD Hours of Operation	0700-2200 TUE-THU 0700-1600 FRI-SAT 1300-1800 SUN O/T BY NOTAM	124.3 236.6	121.8 275.8 Approdirect depen	tion	

Frequencies (VHF/UHF)

CLASS B, CLASS C, TRSA AND SELECTED RADAR APPROACH CONTROL FREQUENCIES

	FACILITY	FREQUENCIES	SERVICE AVAILABILITY
	CINCINNATI CLASS B VHF	[(119.7 (RWY 09/27 090 °-269 °) (RWY 18R/36L 180 °-359 °) - (123.875 (RWY 09/27 270 °-089 °) (RWY 18L/36R 360 °-179 °) - 363.15	CONTINUOUS
	CHARLESTON CLASS C	124.1 269.125 (N) 119.2 269.125 (S)	CONTINUOUS
pace /	COLUMBUS CLASS C	120.2 317.775 (280°-099°) 132.3 279.6 (100°-279°)	CONTINUOUS
me	DAYTON CLASS C	127.65 294.5 (360 °-090 °) 118.85 327.1 (091 °-180 °) 134.45 316.7 (181 °-359 °) Sectors for VHF and UHF traffic	CONTINUOUS
	BRISTOL TRSA	134.425 349.0 (047 -227) 125.5 317.5 (228 -046) O/T 127.85 371.85 ZTL CNTR	0600-2400 local time
dar	HUNTINGTON TRSA	119.75 257.8 (S) 132.95 257.8 (N)	CONTINUOUS
roach —	PERKINSON/BAAF RADAR	118.75 353.9	CONTINUOUS
ntrol	O/T indicates Other times		

ON SECTIONAL CHART

Unless otherwise noted altituc MSL and in feet. Time is local "TO" an altitude means "TO" FL - Flight Level NO A/G - No any to ground

† Other times by NOTAM. NOTAM – Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

U.S. P-PROHIBITED, R-RESTRICTED, W-WARNING, A-ALERT, MOA-MILITARY OPERATIONS AREA

NUMBER	ALTITUDE	TIME OF USE	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES VHF/UHF
R-6602 A	TO BUT NOT INCL 4000	CONTINUOUS MAY 1-SEP 15 †24 HRS IN ADVANCE	WASHINGTON CNTR	118.75 377.1
R-6602 B	4000 TO BUT NOT INCL 11,000	BY NOTAM 24 HRS IN ADVANCE	WASHINGTON CNTR	118.75 377.1
R-6602 C	11,000 TO BUT NOT INCL 18,000	BY NOTAM 24 HRS IN ADVANCE	WASHINGTON CNTR	118.75 377.1
A-220	TO 4000 AGL	0800-2200	NO A/G	

Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.

MOA NAME	ALTITUDE*	TIME OF USE†	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES — VHF/UHF
BRUSH CREEK	100 AGL TO BUT NOT INCL 5000	0800-2200 MON-SAT	INDIANAPOUS CNTR	134.0 135.57
BUCKEYE	5000	0800-2200 MON-FRI 0800-1600 SAT-SUN	Indianapolis Cntr	134.0 135.57
EVERS	1000 AGL	SR-SS BY NOTAM	Washington Cntr	

^{*}Altitudes indicate floor of MOA. All MOAs extend to but do not include FL 180 unless otherwise indicated in tabulation or on chart. †Other times by DoD NOTAM.

Sunrise to Sunset

VFR SECTIONAL AND TERMINAL AREA CHARTS

GENERAL INFORMATION

The symbols shown in this section illustrate those that appear in the Sectional Aeronautical Charts (Sectionals) and Terminal Area Charts (TACs). The same symbology is utilized in VFR Flyway Planning Charts, Helicopter Route Charts and Caribbean Aeronautical Charts (CACs), however the scale of the symbols may be different due to the particular chart scales. Where symbology is distinctive to a given chart, examples and explanations are given in the additional examples. These charts are updated every 56 days.

AIRPORTS Landplane: Civil **Ultralight Flight Park** Non-Towered Towered Airports having control towers (CT) (Selected) are shown in blue, all others are shown in magenta. All recognizable runways, including Landplane: some that may be closed, are shown **Landmark Value** for visual identification purposes. Fuel PUBLIC USE - (Soft surfaced available. runway, or hard surfaced runway Fuel not available less than 1500' in length.) Fuel Runway patterns will be depicted not available. at airports with at least one hard surfaced runway 1500' or greater in length. Complete information **RESTRICTED OR PRIVATE** is not available. (Soft surfaced runway, or hard Landplane: surfaced runway less than 1500' Non-Towered Towered Civil-Military in length.) Non-public use having landmark value. OBJECTIONABLE **OBJECTIONABLE** is an airport Landplane: Military that has an airspace determina-Non-Towered Towered tion based upon a number of factors including conflicting traffic Refueling and repair facilities not patterns with another airport, indicated. hazardous runway conditions, or natural or man-made obstacles in close proximity to the landing area. Heliport Non-Towered Towered **UNVERIFIED** - A landing area available but warranting more (Selected) than ordinary precaution due to: (1) lack of current information on Foreign field conditions, and/or **Foreign Airport Note** (2) available information indi-NOTE: Airports outside the U.S. Flight Information Region (FIR) cates peculiar operating limitaare shown with the standard O symbol. tions. Only the airport names and ICAO identifiers are shown. **ABANDONED** - Depicted for Appropriate note as landmark value or to prevent required for hard surfaced confusion with an adjacent usrunways only: "(CLOSED)" able landing area. (Normally at

least 3000' paved).

AIRPORTS (Continued)

Seaplane

Facility No Fuel



Facility With Fuel Non-Towered




Facility With Runway and Waterway (P)

Airport Data Grouping

Boxed airport name indicates airport for which a Special Traffic Rule has been established.

(Pvt): Non-public use having landmark value.


"OBJECTIONABLE": This airport may adversely affect airspace use.

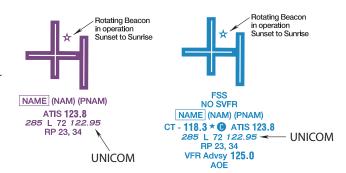

Flight Service Station on field	FSS	Elevation in feet	285
Airports where fixed wing special VFR operations are prohibited (shown above airport	NO SVFR	Lighting in operation Sunset to Sunrise	L
name) FAR 91		Lighting limitations exist; refer to Chart Supplement	*L
Indicates FAR 93 Special Air Traffic Rules and Airport Traffic Pattern		Length of longest runway in hundreds of feet; usable length may be less.	72
Location Identifier	(NAM)		
ICAO Location Identifier	(PNAM)	Aeronautical advisory station	122.95
Control Tower (CT) - primary frequency	СТ - 118.3	Runways with Right Traffic Patterns (public use)	RP 23,34
Star indicates operation part-time. See tower frequencies tabulation for hours of operation	*	See Chart Supplement	*RP
		VFR Advisory Service Shown when ATIS is not available and frequency is other than the	VFR Advsy 125.0
Follows the Common Traffic Advisory Frequency (CTAF)	©	primary CT frequency.	vi i i i i i i i i i i i i i i i i i i
		Weather Camera (Alaska)	WX CAM
Automatic Terminal Information Services	ATIS 123.8	Airport of Entry	AOE
Automatic Flight Information Service	AFIS 135.2	When information is lacking. the respective	
Automated Surface Weather Observing Systems; shown when full-time ATIS is not available.	ASOS/AWOS 135.42	character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.	


RADIO AIDS TO NAVIGATION

VOR




VORTAC

When an NDB NAVAID shares the same name and Morse Code as the VOR NAVAID the frequency can be collocated inside the same box to conserve space.




VOR-DME




PROVO

DME

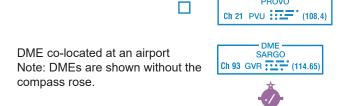


Compass Rose

Example of VOR NAVAID co-located at airport



Compass Rose is "reference"

Non-Directional Radio Beacon (NDB)



NDB-DME



NAVAID Used To Define Class B Airspace ILS Components

ILS-DME

CLEVELAND-HOPKINS DME ANTENNA (I-HPI) Ch 36 (109.9)


TAC - Shown when used in description of Class B airspace.

SALT LAKE CITY DME ANTENNA (I-BNT/I-UTJ) Ch 52 (111.5)

Compass Rosette

Shown only in areas void of VOR roses.

Compass rosette will be based on the five year epoch magnetic variation model.



RADIO AIDS TO NAVIGATION (Continued)


Automated Weather Broadcast Services

Automated Weather Observing System (AWOS) / Automated Surface Observing System (ASOS).

Flight Service Station (FSS)

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2 and 243.0 are available at many Alaskan FSSs and are not shown above boxes. All other frequencies are shown. Frequencies transmit and receive except those followed by an R.

R - receive only



NAVAID same name as FSS

but not an RCO

Off Airport AWOS/ASOS

O SANDBERG ASOS 120.625 SDB

FSS Radio

providing

communications

voice

Broadcast Stations (BS)

On request by the proper authority or when a VFR Checkpoint



Remote Communications Outlet (RCO)

122.525 123.65 Frequencies above HANCOCK RCO thin line box are GREEN BAY remoted to NAVAID site. Other frequencies at FSS providing 122.35 voice communication ST PAUL may be available 108.6 STP ∺ determined by altitude MINNEAPOLIS and terrain. Consult Chart Supplement for complete information. 122.35 HUMPHREY Thin line box with-275 HPY

Thin line box without frequencies and controlling FSS name

indicates no FSS frequency available.

AIRSPACE INFORMATION

Class B Airspace

Sectional

LAS VEGAS CLASS B



Appropriate notes as required may be shown.


Only the airspace effective below 18,000 feet MSL are shown.

(Mode C see FAR 91.215 / AIM)

Terminal Area Chart (TAC)

LAS VEGAS CLASS B

MILES CITY



CTC LAS VEGAS APP ON 121.1 OR 257.8


All mileages are nautical (NM).

All radials are magnetic.

Class C Airspace

Appropriate notes as required may be shown.

(Mode C see FAR 91.215/ AIM)



48 - Ceiling of Class C in hundreds of feet MSL

The state of the stat

CTC BURBANK APP WITHIN 20 NM ON 124.6 395.9

Class E Airspace

The limits of Class E airspace shall be shown by narrow vignettes or by the dashed magenta symbol. Individual units of designated airspace are not necessarily shown; instead, the aggre-



gate lateral and vertical limits shall be defined by the following:

Airspace beginning at the surface (sfc) designated around airports.

Airspace beginning at 700 feet AGL that laterally abuts 1200 feet or higher Class E Airspace.

Airspace beginning at 700 feet AGL that laterally abuts uncontrolled (Class G) airspace.




700' Class E eff

0600-2300

Airspace beginning at 1200 feet AGL that laterally abuts uncontrolled (Class G) airspace.


Differentiates floors of airspace greater than 700 feet above the surface.

When the ceiling is less than 18,000 feet MSL, the value prefixed by the word "CEILING", shall be shown along the limits.



Class D Airspace

Altitude in hundreds of feet MSL




(A minus in front of the figure is used to indicate "from surface to but not including...")



Airspace beginning at the surface (sfc) designated around airports.

Airspace beginning at the surface with an airspace exclusion area where Class E airspace is excluded below 1200' MSL.



Class E Airspace (Continued)

Low Altitude Airways VOR and LF/MF (Class E Airspace)

Low altitude Federal Airways are indicated by centerline.

Only the controlled airspace effective below 18,000 feet MSL is shown

Miscellaneous Air Routes

Combined Federal Airway/RNAV 2 "T" Routes are identified in solid blue type adjacent to the solid magenta federal airway identification.

The joint route symbol is screened magenta.

Flight Information Regions (FIR)




Oceanic Control Areas (OCA)

OAKLAND OCEANIC CONTROL AREA

Control Areas (CTA)

MONTERREY CTA SECTOR 3

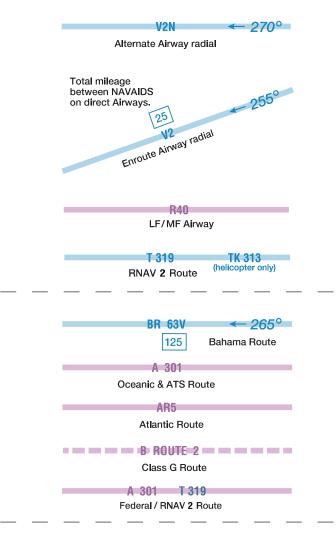

Offshore Control Areas




ATLANTIC LOW

Foreign Airspace Note

NOTE: Limited chart information provided outside of U.S. airspace. Refer to DoD (NGA) or foreign charts and flight information publications outside U.S. airspace.

Special Conservation Areas

National Park, Wildlife Refuge, Primitive and Wilderness Areas, etc.




Special Flight Rules Area (SFRA) Relating to National Security

Example: Washington DC

Appropriate notes as required may be shown.


Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other linear features.




WASHINGTON DC METROPOLITAN AREA SFRA

WashIngton DC Metropolitan Area Special Flight Rules Area/Flight Restricted Zone (DC SFRA & DC FRZ) (See description in Atlantic Ocean).

NOAA Regulated National Marine Sanctuary Designated Areas




Flight operations below 1000' AGL over the designated areas within the Gulf of Farallones National Marine Sanctuary violate NOAA regulations (see 15 CFR 922).

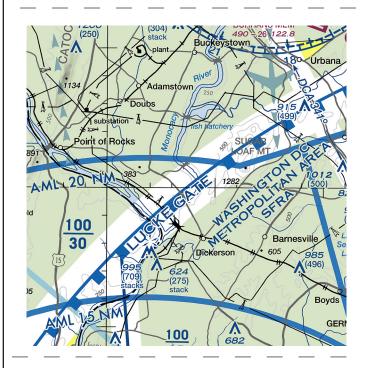


Temporary Flight Restriction (TFR) Relating to National Security

Example: Washington DC

Appropriate notes as required may be shown.



CAUTION
CONTACT FLIGHT SERVICE FOR
LATEST FLIGHT RESTRICTION
STATUS AND NOTAMS ASSOCIATED
WITH P-40 AND R-4009

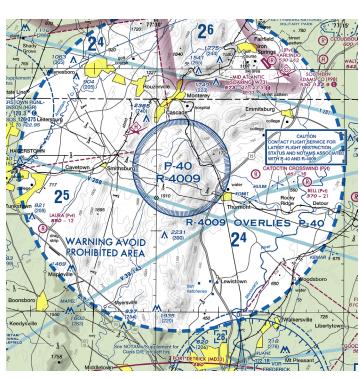

Special Flight Rules Area (SFRA)




"SPECIAL FEDERAL AVIATION REGULATIONS (SFAR)
14 CFR Part 93, Subpart U and SFAR 50.2 GRAND CANYON NATIONAL PARK SPECIAL
FLIGHT RULES AREA. Special regulations apply
to all aircraft operations below 18,000 feet MSL.

Special Use Airspace

Only the airspace effective below 18,000 feet MSL is shown.

The type of area shall be spelled out in large areas if space permits.





PROHIBITED, RESTRICTED or WARNING AREA





MILITARY OPERATIONS AREA (MOA)

Special Air Traffic Rules / Airport Patterns (FAR Part 93)

Appropriate boxed note as required shown adjacent to area.

Inside the FAR Part 93 boundary area, the cross hatching is at a 45 degree angle. The hypsometric tint shall be masked within the area around the yellow city tint when applicable (should not be confused with white glacier tint).



Pilots are required to obtain an ATC clearance prior to entering this area.

Flight Restricted Zone (FRZ) Relating to National Security



National Security Area

Appropriate notes as required may be shown



Small Area

NOTICE
FOR REASONS OF NATIONAL SECURITY
PILOTS ARE REQUESTED TO AVOID FLIGHT
BELOW 1200' MSL IN THIS AREA

Special Awareness Training Areas



NOTICE
Special awareness training required within 60 NM of DCA VOR-DME. See description on Flyway.

Mode C (FAR 91.215)

Appropriate notes as required may be shown.



Air Defense Identification Zone (ADIZ)

Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other linear features. CONTIGUOUS U.S. ADIZ

High Energy Radiation Areas


Appropriate notes as required may be shown

Solar Farm-Ocular Glare

Military Training Routes (MTR)

utes (SMAR)

Special Military Activity Routes (SMAR)



Boxed notes shown adjacent to route.

SPECIAL MILITARY ACTIVITY FOR IR850, IR851, IR852 CTC BANGOR RADIO ON 122.4 255.4 FOR ACTIVITY STATUS

> 40 05 AGL

IFR Routes

Arrival




Departure

TAC only

8000 - 12 000

Arrival/Departure

Special Security Notice Permanent Continuous Flight Restriction Areas



DISNEYLAND THEME PARK See Note for requirements

Sporting Event Temporary Flight Restriction (TFR) Sites


STADIUM

National Defense Airspace Temporary Flight Restriction (TFR) Areas



Dallas National Defense Airspace TFR Check NOTAMs

Space Operations Area (FAR Part 91.143)



Miscellaneous Activity Areas

Aerobatic Practice Area



Glider Operations



Hang Glider Activity



Ultralight Activity



Unmanned Aircraft Activity



Parachute Jumping Area with Frequency



122.9

Space Launch Activity Area



VFR Transition Routes

Appropriate notes as required may be shown.

VFR TRANSITION ROUTE ATC CLEARANCE REQUIRED SEE SHOWBOAT GRAPHIC ON SIDE PANEL

Uni-directional



Bi-directional



Bi-directional with NAVAID Ident and Radial



Terminal Radar Service Area (TRSA)

TRSA Name

HARRISBURG TRSA

TRSA Boundaries

TRSA Sectors

Appropriate notes as required may be shown.

80 - Ceiling of TRSA in hundreds of feet MSL - Floor of TRSA in hundreds of feet MSL

SEE TWR FREQ TAB






NAVIGATIONAL AND PROCEDURAL INFORMATION

Isogonic Line and Value

Isogonic lines and values shall be based on the five year epoch magnetic variation model.




Local Magnetic Notes

Unreliability Notes

Magnetic disturbance of as much as 78° exists at ground level and 10° or more at 3000 feet above ground level in this vicinity.

Intersections

Named intersections used as reporting points. Arrows are directed toward facilities that establish intersection.



Aeronautical Lights

By Request

Rotating or Oscillating

Isolated Location

Rotating Light with Flashing Code Identification Light








Rotating Light with Course Lights and Site Number





NAVIGATIONAL AND PROCEDURAL INFORMATION (Continued)

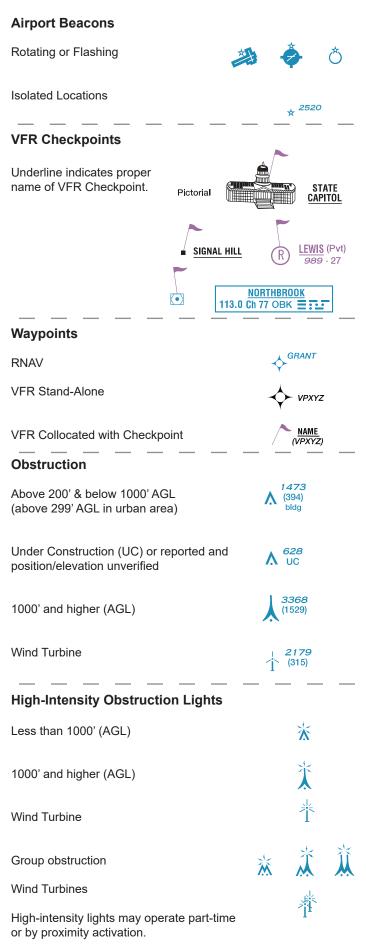

Marine Lights

With Characteristics of Light	Oc R SEC
	Land Ligh
Red	R
White	*W
Green	G
Blue	BU
Orange	OR
Black	В
Yellow	Υ
Sector	SEC
Fixed	F
Single Occulting	Oc
Group Occulting	Oc (2)
Composite Group Occulting	Oc (2+1)
Isophase	Iso
Flashing	FI
Group Flashing	FI (2)
Composite Group Flashing	FI (2+1)
Quick	Q
Interrupted Quick/Interrupted Quick Flashing	IQ
Morse Code	Mo (A)
Fixed and Flashing	FFI
Alternating	Al
Group	Gp
Long Flash	LFI
Group Quick Flashing	Q (3)
Very Quick Flashing	VQ
Group Very Quick Flashing	VQ (3)
Interrupted Very Quick Flashing	IVQ
Ultra Quick Flashing	UQ
Interuppted Ultra Quick Flashing	IUQ
* Marina Lighta are white unless other	

^{*} Marine Lights are white unless otherwise noted. Alternating lights are red and white unless otherwise noted.

Group Obstruction

Above 200' & below 1000' AGL (above 299' AGL in urban area)	(227)
1000' and higher (AGL)	4977 (1432)
At least two in group 1000' and higher (AGL)	2889 (1217)
Wind Turbines	2735 (415)

Wind Turbine Farms

When highest wind turbine is unverified, UC will be shown after MSL value.



Maximum Elevation Figure (MEF)


(see VFR Terms tab for explanation)

135

NAVIGATIONAL AND PROCEDURAL INFORMATION (Continued)

Chart Limits

Outline on Sectional of Terminal Area Chart



LOS ANGELES TERMINAL AREA
Pilots are encouraged to use the Los Angeles VFR
Terminal Area Chart for flights at or below 10,000'

Outline of Special Chart on Sectional and Terminal Area Chart



3 tracks

under construction

Outline on Sectional of Inset Chart



See inset chart on the St. Louis Sectional for additional information

CULTURE

Railroads

Single Track

Double Track

More Than Two Tracks

Non-operating, Abandoned or

Under Construction

Roads

Electric

Dual-Lane Divided Highway Category 1

oatogory i

Primary Category 2

Secondary Category 2

Trails

Category 3

Provides symbolization for dismantled railroad when combined with label "dismantled railroad."

Railroad Yards


Limiting Track To Scale



Location Only



Railroad Stations




Railroad Sidings and Short Spurs



Road Markers

Interstate Route No.



(40)

U.S. Route No.



Road Names

LINCOLN HIGHWAY


Roads Under Construction

Air Marked Identification Label

under construction

NASHVILLE

CULTURE (Continued)

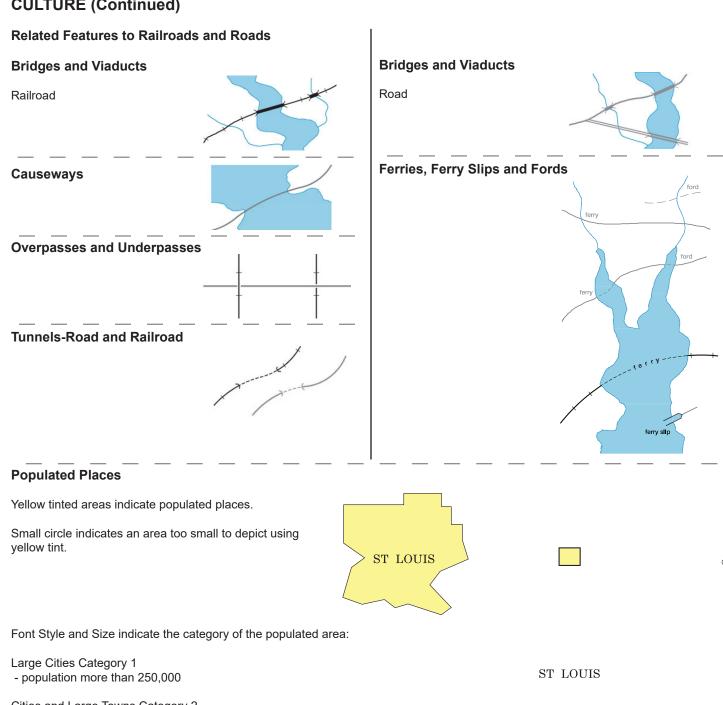

Cities and Large Towns Category 2

- population 25,000 to 250,000

Towns and Villages Category 3

- population less than 25,000 Frankfort

CULTURE (Continued)

Boundaries				
International		Time Zones	:	
State or Province			PST +8 (+70T) = UTC	+7 (+6DT) = UTC
Convention or Mandate Lin			φ	<u></u>
	RUSSIA	Date Line	INTERNATIONAL DATE LINE	(Monday) (Sunday)
 Miscellaneous Cultural Fea		-		
Dams	\	Dam Carrying Road		
Passable Locks		Small Locks		-
	locks		, , , , , , , , , , , , , , , , , , ,	
Weirs and Jetties	jetties	Seawalls	seaw	all
Breakwaters	breakwater	Piers, Wharfs, Quays, etc.	piers	
Pipelines	pipeline	Power Transmission		
Underground	underground pipeline	and Telecommunication L	.ines }	——
Landmark Features	substation fort	Tanks	• water	,
	■ cemetery	Outdoor Theater	• gas	
Mines or Quarries		Outdoor Theater	8	
Shaft Mines or Quarries	%	Race Tracks		
Wells		Coast Guard Station		
Other than water	oll O		+	i
Lookout Towers (Elevation Base of Tower)	— — — — — — — — — — — — — — — — — — —	Landmark Areas		
Aerial Cableways, Conveyo	erial cableway		laı	ndfill

HYDROGRAPHY

Open Water



Open/Inland Water



Lakes

Label as required.



Perennial

When too numerous to show individual lakes, show representative pattern and descriptive note. Number indicates elevation.



Non-Perennial

(dry, intermittent, etc.) Illustration includes small perennial lake.



Reservoirs


Natural Shorelines



Man-made Shorelines Label when necessary for clarity



Under Construction



Inland Water



Shorelines

Definite



Fluctuating



Unsurveyed Indefinite



Man-made



HYDROGRAPHY (Continued)

Streams Canals ERIE Perennial To Scale Non-Perennial Abandoned or Under Construction abandoned Fanned Out Abandoned to Scale Alluvial fan Small Canals and Drainage / Irrigation Ditches Perennial Braided Disappearing Non-Perennial Seasonally Fluctuating Abandoned or Ancient abandoned with undefined limits Numerous with maximum bank limits, prominent and constant Representative pattern and/or descriptive note. Sand Deposits in and along riverbeds **Aqueducts** To Scale **Wet Sand Areas** Abandoned or Under Construction Within and adjacent to desert areas underground aqueduct Underground Suspended or Elevated

Tunnels

Kanats

Underground with Air Vents

underground aqueduct

HYDROGRAPHY (Continued)

Falls Mangrove And Nipa Double-Line falls Single-Line **Cranberry Bogs Rapids** Double-Line **Land Subject To Inundation** Single-Line Reefs-Rocky or Coral Salt Evaporators and Salt Pans Man Exploited **Fish Ponds and Hatcheries Hummocks and Ridges Peat Bogs Miscellaneous Underwater Features Not Otherwise Symbolized Rice Paddies** Extensive areas indicated by label only. **Wrecks** Springs, Wells and Waterholes Exposed Swamps, Marshes and Bogs **Rocks-Isolated** Bare or Awash **Tundra** tundra

HYDROGRAPHY (Continued)

Permanent Snow and Ice Areas

Glaciers Ice shelf ice Permanent Polar Ice APPROXIMATE MINIMUM LIMITS
OF POLAR ICE FOR SEPTEMBER **Glacial Moraines** cliff Pack Ice Ice Cliffs Snowfields, Ice Fields And Ice Caps pack ice LIMITS OF PACK ICE FOR MARCH **Foreshore Flats** Tidal flats exposed at low tide. Ice Peaks **RELIEF Contours** Basic Depression (Illustration includes mound within depression) Approximate Values Intermediate Auxiliary

RELIEF (Continued)

Sand or Gravel Areas Sand Dunes To Scale **Hachuring Spot Elevations** Position Accurate Position Accurate, Elevation Approximate Highest in General Area 6973 Highest on Chart **Mountain Pass Distorted Surface Areas Lava Flows Sand Ridges** To Scale



FAA Chart Users' Guide - VFR Chart Symbology - Flyway Planning Chars

VFR FLYWAY PLANNING CHARTS

GENERAL INFORMATION

VFR Flyway Planning Charts are printed on the reverse sides of the Baltimore-Washington, Charlotte, Chicago, Cincinnati, Dallas-Ft. Worth, Denver, Detroit, Houston, Las Vegas, Los Angeles, Miami, Orlando, New Orleans, Phoenix, St. Louis, Salt Lake City, San Diego, San Francisco, Seattle, and Tampa Terminal Area Charts (TACs). The scale is 1:250,000, with area of coverage the same as the associated TACs. Flyway Planning Charts depict flight paths and altitudes recommended for use to by-pass areas heavily traversed by large turbine-powered aircraft. Ground references on these charts provide a guide for visual orientation. VFR Flyway Planning charts are designed for use in conjunction with TACs and are not to be used for navigation. These charts are updated every 56 days. **AIRPORTS** Landplane Landplane (continued) No distinction is made AGUA DOLCE ABANDONED - Depicted for between airports with fuel and $(L7\emptyset)$ landmark value or to prevent those without fuel. Runways confusion with an adjacent Unpaved Runways may be exaggerated to clearly usable landing area. Only portray the pattern. Hardportrayed beneath or close to surfaced runways that are the VFR flyway routes or closed but still exist are

included in the charted pattern. Sunset to Sunrise FAR 91 - Fixed wing special VFR operations prohibited.

NO SVFR RIVERSIDE (RAL)

(Pvt): Non-public use having landmark value.

COMPTON

"OBJECTIONABLE": This airport may adversely affect airspace use.



(Pvt)

Rotating Beacon

in operation

Foreign Airport Note

requested by the FAA.

(Normally at least 3000' paved).

NOTE: Airports outside the U.S. Flight Information Region (FIR) are shown with the standard O symbol. Only the airport names and ICAO identifiers are shown.

OBJECTIONABLE

FORFIGN

RADIO AIDS TO NAVIGATION

VHF Omni-Directional Radio Identifier Frequency Range (VOR) **MAL 109.6**

VORTAC

Crosshatch indicates Shutdown status

VOR-DME

FHM 114.2 Underline indicates no voice on this frequency

DME

CH 21 (108.4)

Example: DME co-located at an airport.

DME **GVR CH 93 (114.65)**



Non-Directional Radio Beacon (NDB)

NDB-DME

WDP 396 Underline indicates no voice on this frequency



LSJ 206

NAVAIDS Used to Define Class Airspace ILS - DME

CLEVELAND-HOPKINS DME ANTENNA 0 (I-HPI) Ch 36 (110.3)

Shared ILS - DME

MINNEAPOLIS 0 **DME ANTENNA** (I-MSP/I-HKZ) Ch 40 (110.3)

AIRSPACE INFORMATION


Class B Airspace

Appropriate notes as required may be shown.

(Mode C see FAR 91.215/AIM)

All mileages are nautical (NM).

All radials are magnetic.




▲ ☐ - Floor of Class B in hundreds of feet MSL

LAS VEGAS CLASS B


Floors extending "upward and above" a certain altitude are preceded by a +. Operations at or below these altitudes are outside of the Class B Airspace.)

Class D Airspace

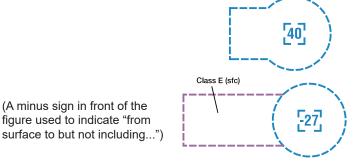

ALTITUDE IN HUNDREDS OF FEET MSL.

Class C Airspace

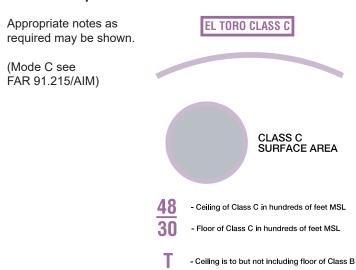

Class E Surface (SFC) Airspace



Special Airspace Areas

(A minus sign in front of the


figure used to indicate "from

Special Flight Rules Area (SFRA) **Relating to National Security**

Example: Washington DC


Appropriate notes as required may be shown.

Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other linear features.

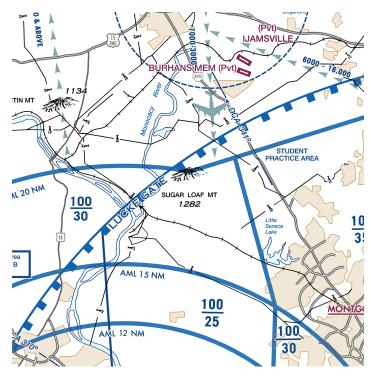

Flight Restricted Zone (FRZ) Relating To National Security


Example: Washington DC

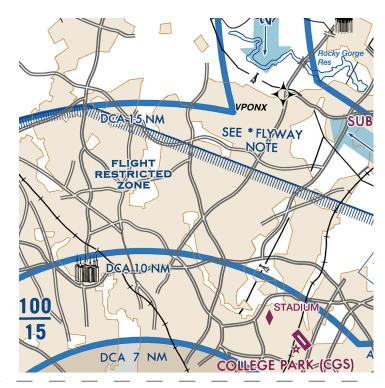

Temporary Flight Restriction (TFR) Relating To National Security

Example: Washington DC

Appropriate notes as required may be shown.

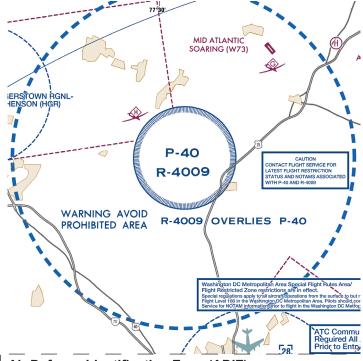

Special Use Airspace

Only the airspace effective below 18,000 feet MSL is shown.

The type of area shall be spelled out in large areas if space permits.



PROHIBITED, RESTRICTED or WARNING AREA



MILITARY OPERATIONS AREA (MOA) or ALERT AREA

Air Defense Identification Zone (ADIZ)

Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other

CONTIGUOUS U.S. ADIZ


linear features.

Foreign Airspace Note


NOTE: Limited chart information provided outside of U.S. airspace. Refer to DoD (NGA) or foreign charts and flight information publications outside U.S. airspace.

Special Air Traffic Rules/Airport Traffic Areas (FAR Part 93)

Appropriate boxed note as required shown adjacent to area. Inside the FAR Part 93 boundary area, the cross hatching is at a 45 degree angle.



Terminal Radar Service Area (TRSA)



 $\frac{100}{90}$ - Celling of TRSA in hundreds of feet MSL - Floor of TRSA in hundreds of feet MSL

IFR Routes

Arrival



Departure



Arrival/Departure



VFR Transition Routes

Appropriate notes as required may be shown.

VFR TRANSITION ROUTE ATC CLEARANCE REQUIRED SEE SHOWBOAT GRAPHIC ON SIDE PANEL

Uni-directional



Bi-directional



Bi-directional with NAVAID Ident and Radial



Special Conservation Areas

NOAA Regulated National Marine Sanctuary Designated Areas



Flight operations below 1000' AGL over the designated areas within the Gulf of Farallones National Marine Sanctuary violate NOAA regulations (see 15 CFR 922).

Mode C (FAR 91.215)

Appropriate notes as required may be shown.



Sporting Event Temporary Flight Restriction (TFR) Sites

STADIUM

National Defense Airspace Temporary Flight Restriction (TFR) Areas



Dallas National Defense Airspace TFR Check NOTAMs

Miscellaneous Activity Areas

Aerobatic Practice Area



Glider Operations



Hang Glider Activity



Ultralight Activity



Unmanned Aircraft Activity




Parachute Jumping Area with Frequency




Space Launch Activity Area





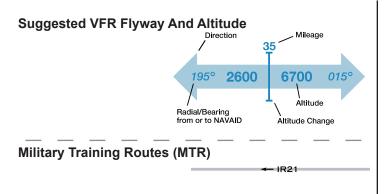

NAVIGATIONAL AND PROCEDURAL INFORMATION

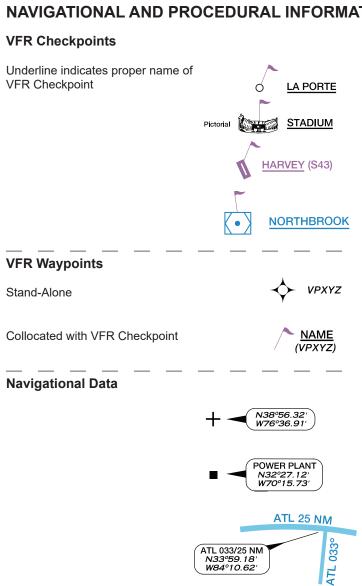


Obstructions

Obstacles may be lit or unlit.

Only obstacles greater than 999' above ground level (AGL) or specified by the local ATC Facility shall be shown.

AGL heights are not shown. High-intensity lights may operate part-time or by proximity activation.



less than 1000' AGL

352

808


Under Construction or reported 500 and position/elevation unverified.

629

Under Construction



CULTURE

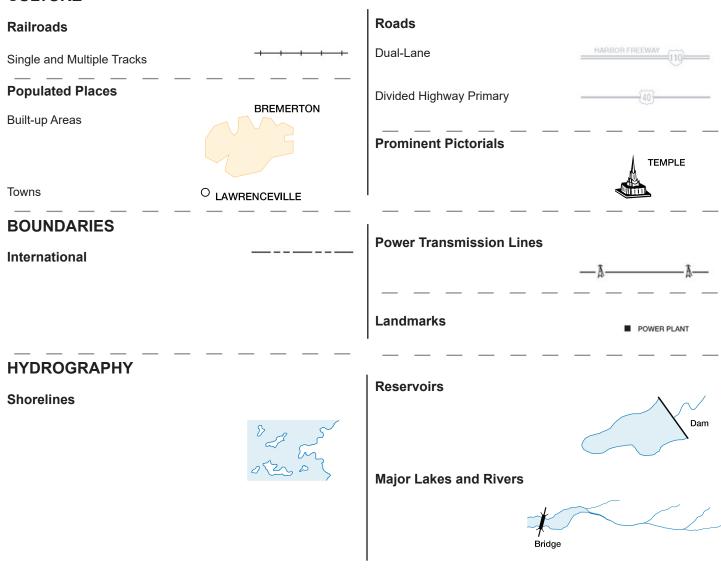

RELIEF

Spot ElevationsPosition Accurate
Mountain Peaks



HELICOPTER ROUTE CHARTS

GENERAL INFORMATION

Helicopter Route Charts are three-color charts that depict current aeronautical information useful to helicopter pilots navigating in areas with high concentrations of helicopter activity. Information depicted includes helicopter routes, four classes of heliports with associated frequency and lighting capabilities, NAVAIDS, and obstructions. In addition, pictorial symbols, roads, and easilyidentified geographical features are portrayed. The scale is 1:125,000. These charts are updated every 56 days.

AIRPORTS

Landplane Seaplane All recognizable runways, including Heliport some that may be closed, are shown for visual identification. **Public** Medical Center Private Unverified Abandoned Foreign

Airport Data Grouping

Boxed airport name indicates airport for which a Special Traffic Rule has been established.

(Pvt): Non-public use having landmark value. "OBJECTIONABLE": This airport may adversely affect airspace use.

Flight Service Station on field **FSS**

Airspace where fixed wing special visual flight NO SVFR rules operations are prohibited (shown above

airport name) FAR 91

Indicates FAR 93 Special Air Traffic Rules and

Airport Traffic

frequencies tabulation for hours of operation

Location Idendtifier (NAM)

ICAO Location Identifier (PNAM)

CT - 119.1 Control Tower (CT) - primary frequency

Star indicates operation part-time. See tower

£

Heliports public and private

(H)

Helipads located at major airports (when requested)

(H)

Ultralight Flight Park

(F)

Foreign Airport Note

NOTE: Airports outside the U.S. Flight Information Region (FIR) are shown with the standard O symbol. Only the airport names and ICAO identifiers are shown.



NAME (NAM) (PNAM)

Automated Terminal Information Service

ATIS 115 4

Automated Surface Weather Observing Systems (shown when full-time ATIS is not available). Some ASOS/AWOS facilities may not be located at airports.

ASOS/AWOS 135.42

Elevation in feet

to Chart Supplement

285

Lighting in operation Sunset to Sunshine Lighting limitations exists, refer

*L

Ĺ

UNICOM - Aeronautical advisory station

122.95

Follows the Common Traffic Advisory Frequency (CTAF)

A

Unverified Heliport

(Unverified)

Airport of Entry

AOE

When lighting is lacking, the respective character is replaced by a dash.

Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting. Dashes are not shown on heliports or helipads unless additional information follows the elevation (e.g. UNICOM, CTAF).

NAME


RADIO AIDS TO NAVIGATION

NAVAIDs

VHF Omni-Directional Radio (VOR) Range

Open circle symbol shown when NAVAID located on airport. Type of NAVAID shown in top of box.

Compass Rose is "reference" oriented to magnetic north.




Operates less than continuous or On-Request

•

VOR

VORTAC

When an NDB NAVAID shares the same name and Morse Code as the VOR NAVAID the frequency can be collocated inside the same box to conserve space.



OAKDALE

116.8 OAK

Underline indicates no voice on this frequency

VOR-DME



DME



Flight Service Station (FSS)

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2 and 243.0 are available at many Alaskan FSSs and are not shown above boxes. All other frequencies are shown.

Certain FSSs provide Airport Advisory Service, refer to Chart Supplement.

R - Receive Only

DENVER DEN



FSS oper 0600-2200 Rancho Murieta FSS other times


123.6

ILIAMNA

411 ILI :: ...

DME Ch 91 (114.4)

Non-Directional Radio Beacon (NDB)

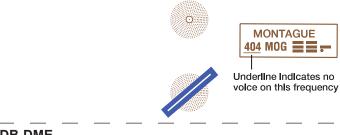

NDB-DME



NAVAID Used to Define Class B Airspace



DME ANTENNA ISP/I-HKZ) Ch 40 (110.3)

Broadcast Stations (BS)

On request by the proper authority or when a VFR Checkpoint.



 \odot

0

⊙ RS-KFTM 1400

Remote Communications Outlet (RCO)

Frequencies above thin line box are remoted to NAVAID site.
Other FSS frequencies providing voice communications may be available as determined by altitude and terrain. Consult Chart Supplement for complete information.

Thin line box without frequencies and controlling FSS name indicates no FSS frequency available.

123.6
OLYMPIA RCO
MCCHORD

FREDERICK
109.9 FDK

AIRSPACE INFORMATION


Class B Airspace

Appropriate notes as required may be shown. (Mode C see FAR 91.215/AIM)

All mileages are nautical (NM)

(Floors extending "upward from above" a certain altitude are preceded by a +. Operations at and below these altitudes are outside of Class B Airspace.)


All radials are magnetic.

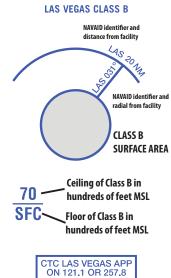

Class D Airspace


(A minus in front of the figure is used to indicate "from surface to but not including...")


Altitudes in hundreds of feet MSL.



Class C Airspace

Appropriate notes as required may be shown. (Mode C see FAR 91.215/AIM)

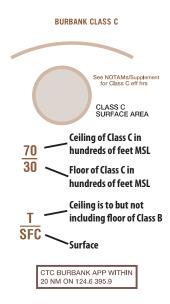

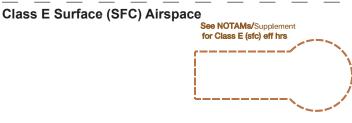

Special Airspace Areas

Special Flight Rules Area (SFRA) Relating to National Security


Example: Washington DC

Appropriate notes as required may be shown.

Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other linear features.

WASHINGTON DC METROPOLITAN AREA SFRA




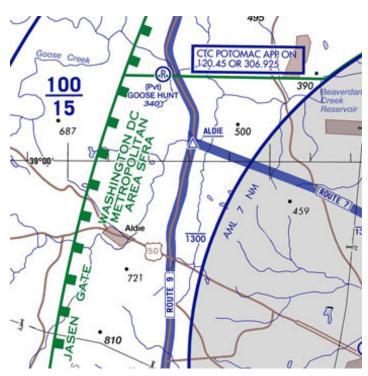

Special Airspace Areas (Continued)

Flight Restricted Zone (FRZ) Relating to National Security

Example: Washington DC

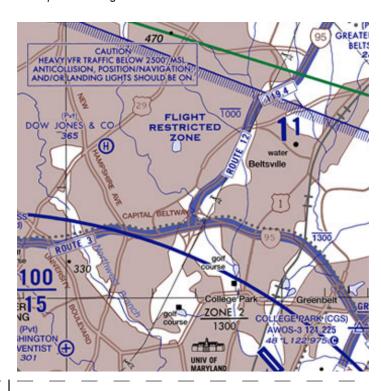

Air Defense Identification Zone (ADIZ)

Note: Delimiting line not shown when it coincides with International Boundary, projection lines or other linear features. CONTIGUOUS U.S. ADIZ

Special Security Notice Permanent Continuous Flight Restriction Areas

DISNEYLAND THEME PARK See Panel for requirements

Mode C (FAR 91.215)


Appropriate notes as required may be shown.

MODE C & ADS-B OUT

Terminal Radar Service Area (TRSA)

Appropriate notes as

required may be shown.



SEE TWR FREQ TAB

- Ceiling of TRSA in hundreds of feet MSL
 - Floor of TRSA in hundreds of feet MSL

Special Air Traffic Rules / Airport Traffic Areas (FAR Part 93)

Appropriate boxed notes as required shown adjacent to area. Inside the FAR Part 93 boundary area, the cross hatching is at a 45 degree angle.



Pilots are required to obtain an ATC clearance prior to entering this area.


Sporting Event Temporary Flight Restriction (TFR) Sites

STADIUM

National Defense Airspace Temporary Flight Restriction (TFR) Areas



Dallas National Defense Airspace TFR Check NOTAMs

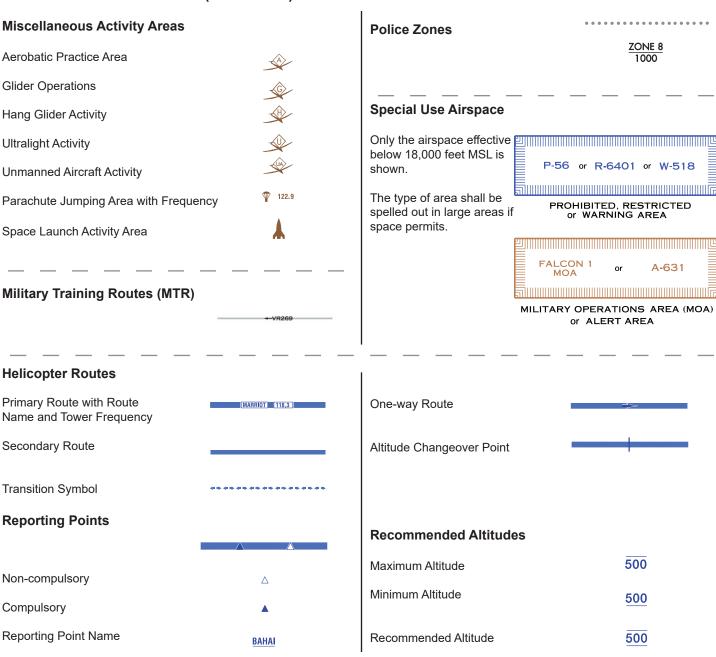

Foreign Airspace Note


NOTE: Limited chart information provided outside of U.S. airspace. Refer to DoD (NGA) or foreign charts and flight information publications outside U.S. airspace.

Special Conservation Areas

National Park, Wildlife Refuge, Primitive and Wilderness Areas, etc.



NOAA Regulated National Marine Sanctuary Designated Areas



Flight operations below 1000' AGL over the designated areas within the Gulf of Farallones National Marine Sanctuary violate NOAA regulations (see 15 CFR 922).

NAVIGATIONAL AND PROCEDURAL INFORMATION


VFR Checkpoints Underline indicates proper name of VFR Checkpoint.




<u>STACKS</u>






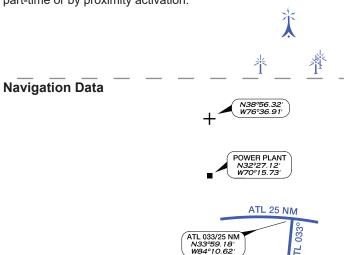



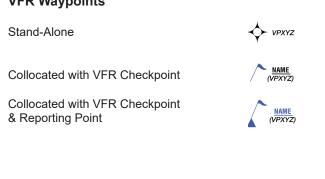



Above 299' and belo	w 1000' AGL	W	(415)
1000' and higher AG	L	从	

Wind Turbine Farms

When highest wind turbine is unverified, UC will be shown after MSL value.




Maximum Elevation Figure (MEF)

(see VFR Terms tab for explanation)

124

Tank-water, oil or gas

CULTURE Railroads Single Track Double Track Bridges Railroad Road Populated Places Built-up Areas

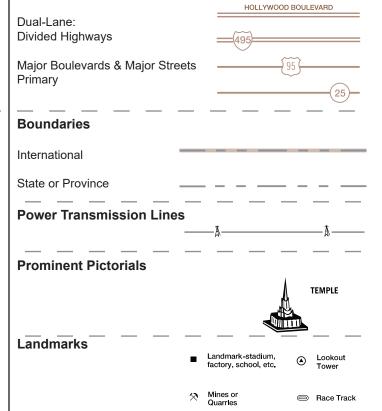


Outdoor Theater

Roads

CARIBBEAN VFR AERONAUTICAL CHARTS (CAC)


The Caribbean Charts are published as two VFR Charts: Caribbean 1 (CAC-1) covers Southern Florida, Cuba, Haiti and the Bahamas; Caribbean 2 (CAC-2) covers Puerto Rico, Haiti, Dominican Republic, the Lesser Antilles and Leeward Islands. Charts are updated every 56-day chart cycle.

Caribbean Charts are designed for VFR flights and provide aeronautical and topographic information of the Caribbean. The aeronautical information includes airports, radio aids to navigation, Class airspace and special use airspace in U.S. and major airports, and radio aids to navigation in foreign areas. The topographic information includes city tint, populated places, principal roads, drainage patterns and shaded relief.

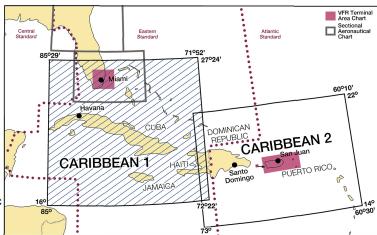


The chart symbols used on the Caribbean Charts are similar to those used in the Sectional and Terminal Area Charts, the major difference being in scale. The Caribbean VFR Chart scale is 1:1,000,000 versus the Sectional Chart Scale of 1:500,000 and Terminal Area Chart Scale of 1:250,000. Chart symbology will appear smaller on the Caribbean VFR Charts.


Example from Caribbean 2 VFR Aeronautical Chart

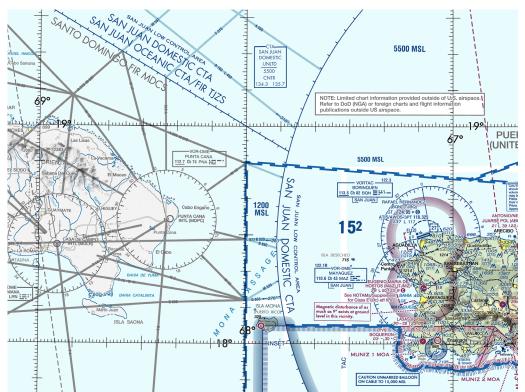

AIRSPACE

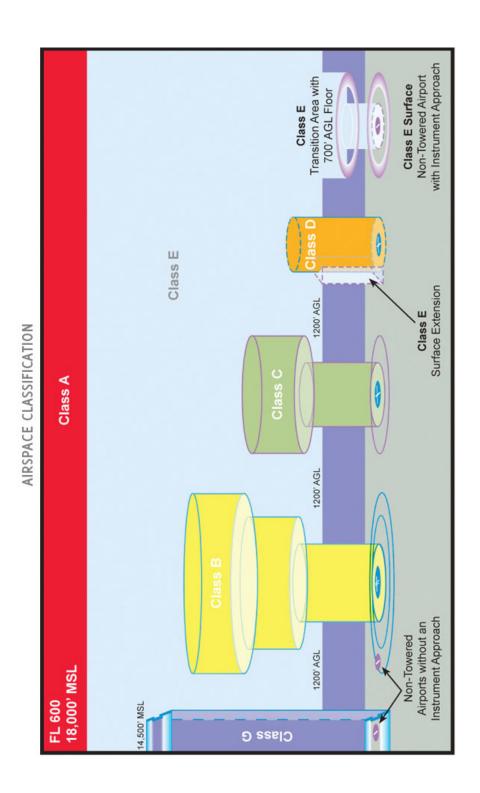

U.S. Airspace depiction as shown on Visual Aeronautical Charts

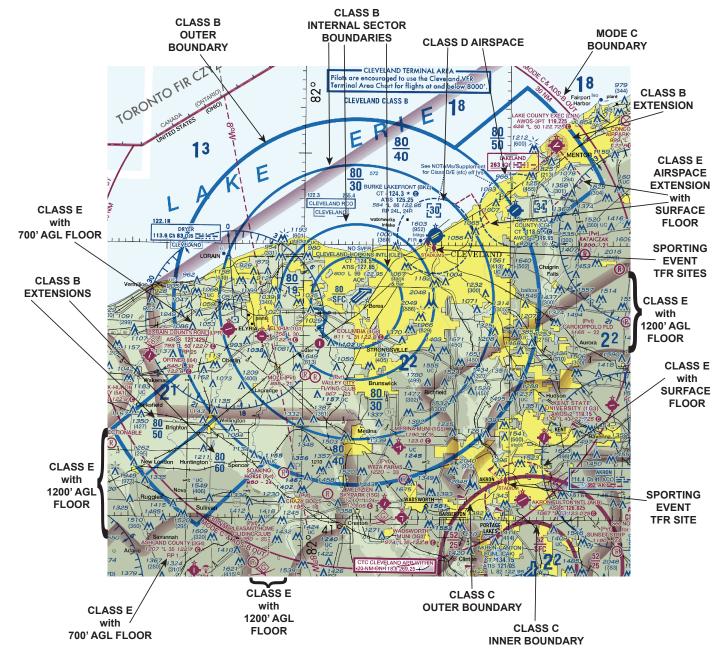

Excerpt from Detroit Sectional Chart

EXPLANATION OF IFR ENROUTE TERMS

FAA charts are prepared in accordance with specifications of the Interagency Air Committee (IAC), and are approved by representatives of the Federal Aviation Administration and the Department of Defense (DoD). Some information on these charts may only apply to military pilots.

The explanations of symbols used on Instrument Flight Rule (IFR) Enroute Charts and examples in this section are based primarily on the IFR Enroute Low Altitude Charts. Other IFR products use similar symbols in various colors. The chart legends portray aeronautical symbols with a brief description of what each symbol depicts. This section provides more details of the symbols and how they are used on IFR Enroute charts.

AIRPORTS

Operational airports are shown on IFR Enroute Charts.

Low Charts:

- All IAP Airports are shown on the Low Altitude Charts (US and Alaska).
- Non-IAP Airports are shown on the U.S. Low Altitude Charts (Contiguous US) have a minimum hard surface runway of 3,000'.
- Non-IAP airports are shown on the U.S. Low Altitude Alaska Charts are show if the runway is 3000' or longer, hard or soft surface.
- Public heliports with an Instrument Approach Procedure (IAP) or requested by the FAA or DoD are depicted on the IFR Enroute Low Altitude Charts.
- Seaplane bases requested by the FAA or DoD are depicted on the IFR Enroute Low Altitude Charts.

On IFR Enroute Low Altitude Charts, airport tabulation is provided that identifies airport names, IDs and the panels they are located on.

High Charts:

- Airports shown on the U.S. High Enroute Charts (Contiguous US) have a minimum hard surface runway of 5000'.
- Airports shown on the U.S. High Enroute Alaska Charts have a minimum hard surface runway of 4000'.

Charted airports are classified according to the following criteria:



Blue - Airports with an Instrument Approach Procedure and/or RADAR MINIMA published in the high altitude DoD Flight Information Publications (FLIPs)

Green - Airports that have an approved Instrument Approach Procedure and/or RADAR MINIMA published in either the U.S. Terminal Procedures Publications (TPPs) or the DoD FLIPs

Brown - Airports without a published Instrument Approach Procedure or RADAR MINIMA


Black - Foreign airports

Airports are plotted at their true geographic position.

Airports are identified by the airport name. In the case of military airports, Air Force Base (AFB), Naval Air Station (NAS), Naval Air Facility (NAF), Marine Corps Air Station (MCAS), Army Air Field (AAF), etc., the abbreviated letters appear as part of the airport name.

Airports marked "Pvt" immediately following the airport name are not for public use, but otherwise meet the criteria for charting as specified above.

Runway length is the length of the longest active runway (including displaced thresholds but excluding overruns) and is shown to the nearest 100 feet using 70 feet as the division point; e.g., a runway of 8,070' is labeled 81. The following runway compositions (materials) constitute a hard-surfaced runway: asphalt, bitumen, chip seal, concrete, and tar macadam. Runways that are not hard-surfaced have a small letter "s" following the runway length, indicating a soft surface.

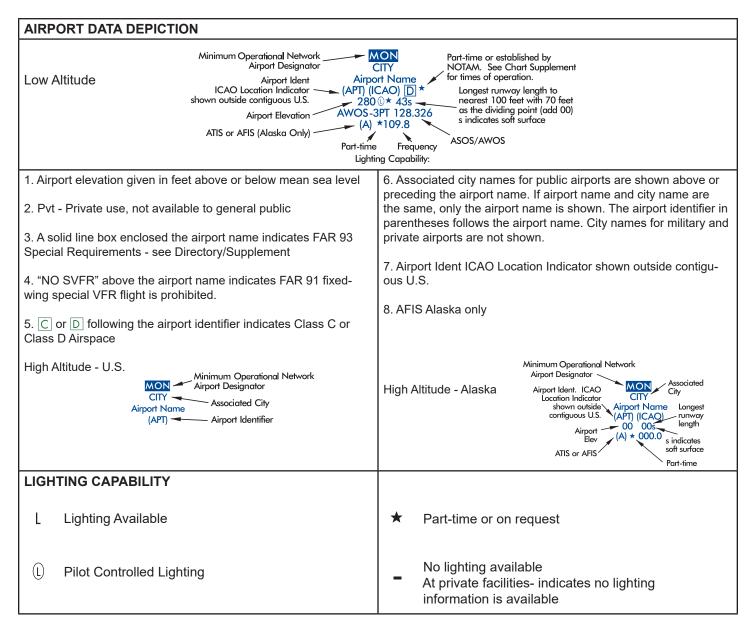

A symbol between the airport elevation and runway length means that runway lights are in operation sunset to sunrise. A symbol indicates there is Pilot Controlled Lighting. A symbol means the lighting is part-time or on request, the pilot should consult the Chart Supplement for light operating procedures. The Aeronautical Information Manual (AIM) thoroughly explains the types and uses of airport lighting aids.

VOR Minimum Operational Network (MON) Airports Designator

MON Airports with the Airport designator at the top of the Airport Data Block. The MON designation is to alert pilots to those airports that have retained ILS and VOR instrument approach procedures for safe recovery in the event of a GPS outage. Refer to the Aeronautical Information Manual (AIM) for expanded MON Airport guidance.

FAA Chart Users' Guide - IFR Enroute Terms

RADIO AIDS TO NAVIGATION

All IFR radio NAVAIDs that have been flight checked and are operational are shown on all IFR Enroute Charts. Very High Frequency/Ultrahigh Frequency (VHF/UHF) NAVAIDs, Very high frequency Omnidirectional Radio range (VORs), Tactical Air Navigation (TACANs) are shown in black, and Low Frequency/Medium Frequency (LF/MF) NAVAIDs, (Compass Locators and Aeronautical or Marine NDBs) are shown in brown.

On IFR Enroute Charts, information about NAVAIDs is boxed as illustrated below. To avoid duplication of data, when two or more NAVAIDs in a general area have the same name, the name is usually printed only once inside an identification box with the frequencies, TACAN channel numbers, identification letters, or Morse Code Identifications of the different NAVAIDs are shown in appropriate colors.

NAVAIDs in a shutdown status have the frequency and channel number crosshatched. Use of the NAVAID status "shutdown" is only used when a facility has been decommissioned but cannot be published as such because of pending airspace actions.

NAVIGATION AND COMMUNICATION BOXES - COMMON ELEMENTS				
LOW ENROUTE CHARTS	HIGH ENROUTE CHARTS			
RCO Frequencies NAVAID Name, SSV(s) FREQ, Ident, CH, Morse Code Latitude, Longitude Controlling FSS Name 000.0 NAME (VL) (T) 000.0 IDT 000 : N00°00.00 w000°00.00 NAME_	RCO Frequencies NAVAID Name Frequency, Ident, SSV(s), Channel Latitude, Longitude Controlling FSS Name 000.0 NAME 000.0 IDT (H) (DL) 000 N00°00.00' W000°00.00' NAME NAME			
COMMON ELEMENTS (HIGH AND LOW CHARTS)				
RCO FREQUENCY Single Frequency	122.6			
Multiple Frequencies Frequencies transmit and receive except those followed by R and T: R - Receive Only T - Transmit Only	255.4 243.0 123.6 122.65 122.2 122.1R 121.5			
NAVAID BOX	VHF/UHF LF/MF			
Thin line NAVAID boxes without frequency(s) and FSS radio name indicates no FSS frequencies available.				
Shadow NAVAID box indicates NAVAID and Flight Service Station (FSS) have same name.				

NAVAID STANDARD SERVICE VOLUME (SSV) CLASSIFICATIONS

SSV Class	Altitudes	Distance (NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500' 14,500' to 18,000' 18,000' to 45,000' 45,000' to 60,000'	40 100 130 100
(VL) VOR Low	1000' to 5,000' 5,000' to 18,000'	40 70
(VH) VOR High	1000' to 5,000' 5,000' to 14,500' 14,500' to 18,000' 18,000' to 45,000' 45,000' to 60,000'	40 70 100 130 100
(DL) DME Low & (DH) DME High*	1000' to 12,900'	40 increasing to 130
(DL) DME Low	12,900' to 18,000'	130
(DH) DME High	12,900' to 45,000' 45,000' to 60,000'	130 100

^{*} Between 1000' to 12,900', DME service volume follows a parabolic curve used by flight managment computers.

Notes: For NAVAIDs with two SSVs, the SSV for each component is shown in paired parentheses with the VOR SSV shown first followed by the DME or TACAN SSV. Additionally, High Altitude facilities provide Low Altitude and Terminal service volume and Low Altitude facilities provide Terminal service volume. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility. In some cases local conditions (terrain, buildings, trees, etc.) may require that the service volume be restricted. The public shall be informed of any such restriction by a remark in the NAVAID entry or by a NOTAM.

DISTANCE MEASURING EQUIPMENT	
Facilities that operate in the "Y" mode for DME reception	(Y)
VOICE COMMUNICATIONS VIA NAVAID	
Voice Transmitted	112.6
No Voice Transmitted	<u>111.0</u>
NAVAID SHUTDOWN STATUS	VHF/UHF
PART TIME OR ON-REQUEST	VHF/UHF LF/MF ★ ★
AUTOMATED WEATHER BROADCAST SERVICES ASOS/AWOS - Automated Surface Observing Station/Automated Weather Observing Station	VHF/UHF LF/MF Automated weather, when available, is broadcast on the associated NAVAID frequency.
LATITUDE AND LONGITUDE Latitude and Longitude coordinates are provided for those NAVAIDs that make up part of a route/airway or a holding pattern. All TACAN facilities will include geographic coordinates.	LOW ENROUTE NO0°00.00' W000°00.00' N00°00.00' W000°00.00' N00°00.00'

AIRSPACE INFORMATION

CONTROLLED AIRSPACE

Controlled airspace consists of those areas where some or all aircraft are subjected to air traffic control within the following airspace classifications of A, B, C, D, & E.

Air Route Traffic Control Centers (ARTCC) are established to provide Air Traffic Control to aircraft operating on IFR flight plans within controlled airspace, particularly during the enroute phase of flight. Boundaries of the ARTCCs are shown in their entirety using the symbol below.

MASHINGTON Air Route Traffic Control Center (ARTCC)

When Controller Pilot Data Link Communication (CPDLC) exists for an ARTCC, the text CPDLC (LOGON KUSA) will be shown parallel to the boundary above or below the ARTCC identification as shown below.

ATIANTA
JACKSONNILE
CPDLC (LOGON KUSA)

CPDLC (LOGON KUSA)

ALANTA
JACKSONNILE
CPDLC (LOGON KUSA)

ATIANTA
COntroller Pilot Data Link Communication (CPDLC)

JACKSONNILE
JACKSONNILE

The responsible ARTCC Center names are shown adjacent and parallel to the boundary line. ARTCC sector frequencies are shown in boxes outlined by the same symbol.

NEW YORK ARTCC Name
Barnegat Site Name
132.15 Frequency

ARTCC Remoted Sites with
discrete VHF and UHF frequencies

Class A Airspace is depicted as open area (white) on the IFR Enroute High Altitude Charts. It consists of airspace from 18,000 Mean Sea Level (MSL) to FL600.

Class B Airspace is depicted as screened blue area with a solid line encompassing the area.

Class C Airspace is depicted as screened blue area with a dashed line encompassing the area with a letter "C" enclosed in a box following the airport name.

Class B and Class C Airspace consist of controlled airspace extending upward from the surface or a designated floor to specified altitudes, within which all aircraft and pilots are subject to the operating rules and requirements specified in the Federal Aviation Regulations (UHF) 71. Class B and C Airspace are shown in abbreviated forms on IFR Enroute Low Altitude Charts. A general note adjacent to Class B airspace refers the user to the appropriate VFR Terminal Area Chart.

Class D Airspace (airports with an operating control tower) are depicted as open area (white) with a letter "D" enclosed in a box following the airport name.

Class E Airspace is depicted as open area (white) on the IFR Enroute Low Altitude Charts. It consists of airspace below FL180.


UNCONTROLLED AIRSPACE

Class G Airspace within the United States extends to 14,500' MSL. This uncontrolled airspace is shown as screened brown.

SPECIAL USE AIRSPACE

Special Use Airspace (SUA) confines certain flight activities, restricts entry, or cautions other aircraft operating within specific boundaries. SUA areas are shown in their entirety, even when they overlap, adjoin, or when an area is designated within another area. SUA with altitudes from the surface and above are shown on the IFR Enroute Low Altitude Charts. Similarly, SUA that extends above 18,000' MSL are shown on IFR Enroute High Altitude Charts. IFR Enroute Charts tabulations identify the type of SUA, ID, effective altitudes, times of use, controlling agency and the panel it is located on.

Users need to be aware that a NOTAM addressing activation will NOT be issued to announce permanently listed times of use.



High and Low	Low Altitude Only	
P - Prohibited Area	MOA - Military Operations Area	
R - Restricted Area	A - Alert Area *	
W - Warning Area		
* Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.		
See Airspace Tabulation on chart for complete information.		

OTHER AIRSPACE

FAR 91 Special Air Traffic Rules are shown with the type NO SVFR above the airport name.



FAR 93 Special Airspace Traffic Rules are shown with a solid line box around the airport name, indicating FAR 93 Special Requirements see Chart Supplement.

NO SVFR NEW YORK John F Kennedy Intl (JFK) 13 L 145 (A) ARR 115.4 SW 117.7 NE ARR/DEP 128.725

Mode C Required Airspace (from the surface to 10,000' MSL) within 30 NM radius of the primary airport(s) for which a Class B airspace is designated, is depicted on IFR Enroute Low Altitude Charts as a blue circle labeled MODE C & ADS-B OUT 30 NM.



Mode C & ADS-B Out is also required for operations within and above all Class C airspace up to 10,000' MSL, but not depicted. See FAR 91.215 and the AIM.

INSTRUMENT AIRWAYS

The FAA has established two fixed route systems for air navigation. The VOR and LF/MF system-designated from 1,200' Above Ground Level (AGL) to but not including FL 180 is shown on IFR Enroute Low Altitude Charts, and the Jet Route system designated from FL 180 to FL 450 inclusive is shown on IFR Enroute High Altitude Charts.

VOR LF/MF AIRWAY SYSTEM (IFR LOW ALTITUDE ENROUTE CHARTS)

In this system VOR airways - airways based on VOR or VORTAC NAVAIDs - are depicted in black and identified by a "V" (Victor) followed by the route number (e.g., "V12").

LF/MF airways - airways based on LF/MF NAVAIDs - are sometimes called "colored airways" because they are identified by color name and number (e.g., "Amber One", charted as "A1"). In Alaska, Green and Red airways are plotted east and

west, and Amber and Blue airways are plotted north and south. Regardless of their color identifier, LF/MF airways are shown in brown.

AIRWAY/ROUTE DATA


On both series of IFR Enroute Charts, airway/route data such as the airway identifications, magnetic courses bearings or radials, mileages, and altitudes (e.g., Minimum Enroute Altitudes (MEAs), Minimum Reception Altitudes (MRAs), Maximum Authorized Altitudes (MAAs), Minimum Obstacle Clearance Altitudes (MOCAs), Minimum Turning Altitudes (MTAs) and Minimum Crossing Altitudes (MCAs)) are shown aligned with the airway.

As a rule the airway/route data is charted and in the same color as the airway, with one exception. Charted in blue, Global Navigation Satellite System (GNSS) MEAs, identified with a "G" suffix, have been added to "V" and "colored airways" for aircraft flying those airways using Global Positioning System (GPS) navigation.

Airways/Routes predicated on VOR or VORTAC NAVAIDs are defined by the outbound radial from the NAVAID. Airways/Routes predicated on LF/MF NAVAIDs are defined by the inbound bearing.

- Minimum Enroute Altitude (MEA) The MEA is the lowest published altitude between radio fixes that assures acceptable navigational signal coverage and meets obstacle clearance requirements between those fixes. The MEA prescribed for a Federal airway or segment, RNAV low or high route, or other direct route applies to the entire width of the airway, segment, or route between the radio fixes defining the airway, segment, or route. MEAs for routes wholly contained within controlled airspace normally provide a buffer above the floor of controlled airspace consisting of at least 300 feet within transition areas and 500 feet within control areas. MEAs are established based upon obstacle clearance over terrain and man-made objects, adequacy of navigation facility performance, and communications requirements.
- Minimum Reception Altitude (MRA) MRAs are determined by FAA flight inspection traversing an entire route
 of flight to establish the minimum altitude the navigation signal can be received for the route and for off-course
 NAVAID facilities that determine a fix. When the MRA at the fix is higher than the MEA, an MRA is established for
 the fix and is the lowest altitude at which an intersection can be determined.
- Maximum Authorized Altitude (MAA) An MAA is a published altitude representing the maximum usable
 altitude or flight level for an airspace structure or route segment. It is the highest altitude on a Federal airway, jet
 route, RNAV low or high route, or other direct route for which an MEA is designated at which adequate reception
 of navigation signals is assured.
- Minimum Obstruction Clearance Altitude (MOCA) The MOCA is the lowest published altitude in effect between radio fixes on VOR airways, off-airway routes, or route segments that meets obstacle clearance requirements for the entire route segment and assures acceptable navigational signal coverage only within 25 statute (22 nautical) miles of a VOR. A MOCA is only shown on the Enroute Low Charts and only published when it is lower than the MEA. When shown, it is preceded by an asterisk.
- Minimum Turning Altitude (MTA) Minimum turning altitude (MTA) is a charted altitude providing vertical and lateral obstruction clearance based on turn criteria over certain fixes, NAVAIDs, waypoints, and on charted route segments. When a VHF airway or route terminates at a NAVAID or fix, the primary area extends beyond that termination point. When a change of course on VHF airways and routes is necessary, the enroute obstacle clearance turning area extends the primary and secondary obstacle clearance areas to accommodate the turn radius of the aircraft. Since turns at or after fix passage may exceed airway and route boundaries, pilots are expected to adhere to airway and route protected airspace by leading turns early before a fix. The turn area provides obstacle clearance for both turn anticipation (turning prior to the fix) and flyover protection (turning after crossing the fix). Turning fixes requiring a higher MTA are charted with a flag along with accompanying text describing the MTA restriction.

Minimum Crossing Altitude (MCA) - An MCA is the lowest altitude at certain fixes at which the aircraft must
cross when proceeding in the direction of a higher minimum enroute IFR altitude. MCAs are established in all
cases where obstacles intervene to prevent pilots from maintaining obstacle clearance during a normal climb to a
higher MEA after passing a point beyond which the higher MEA applies. The same protected enroute area vertical
obstacle clearance requirements for the primary and secondary areas are considered in the determination of the
MCA.




Victor Route (with RNAV/GPS MEA shown in blue)

AREA NAVIGATION (RNAV) "T" ROUTE SYSTEM

The FAA has created new low altitude area navigation (RNAV) "T" routes for the enroute and terminal environments. The RNAV routes will provide more direct routing for IFR aircraft and enhance the safety and efficiency of the National Airspace System. To utilize these routes aircraft are required to be equipped with IFR approved GNSS. In Alaska, TSO-145a and 146a equipment is required.


Low altitude RNAV only routes are identified by the prefix "T", and the prefix "TK" for RNAV helicopter routes followed by a three digit number (T-200 to T-500). Routes are depicted in blue on the IFR Enroute Low Altitude Charts. RNAV route data (route line, identification boxes, mileages, waypoints, waypoint names, magnetic reference courses and MEAs) will also be printed in blue. Magnetic reference courses will be shown originating from a waypoint, fix/reporting point or NAVAID. GNSS MEA for each segment is established to ensure obstacle clearance and communications reception. GNSS MEAs are identified with a "G" suffix.

Joint Victor/RNAV routes are charted as outlined above except as noted. The joint Victor route and the RNAV route identification boxes are shown adjacent to each other. Magnetic reference courses are not shown. MEAs are charted above the appropriate identification box or stacked in pairs, GNSS and Victor. On joint routes, RNAV specific information will be printed in blue.

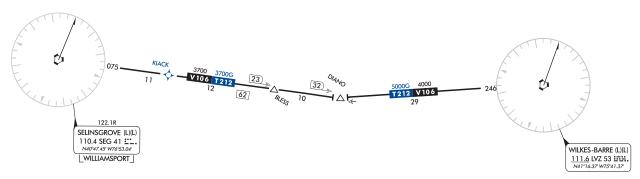

UNUSABLE AIRWAY/ROUTE SEGMENTS

Airway/Route segments designated by the FAA as unusable will be depicted as shown below.

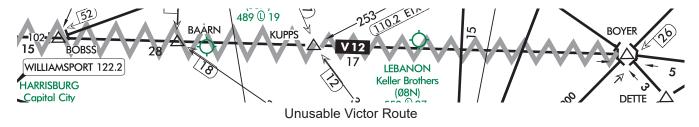

Pilots should not file a flight plan for or accept a clearance that includes navigation on any route or route segment depicted as unusable. Pilots using RNAV may request ATC clearance to fly point-to-point between valid waypoints or fixes, even those on routes depicted as unusable (refer to AC 90-108 for RNAV eligibility).

Coincident Airways/Routes with Unusable Segment

When two airways/routes are coincident, but only one airway/route is designated as unusable, the following note indicating which airway the unusable symbology applies to will be placed in close proximity to the airway/route identifiers.



OFF ROUTE OBSTRUCTION CLEARANCE ALTITUDE (OROCA)

The Off Route Obstruction Clearance Altitude (OROCA) is depicted on IFR Enroute Low Altitude and Pacific charts and is represented in thousands and hundreds of feet above MSL. OROCAs are shown in every 30 x 30 minute quadrant on Area Charts, every one degree by one degree quadrant for IFR Enroute Low Altitude Charts - U.S. and every two degree by two degree quadrant on IFR Enroute Low Altitude Charts - Alaska. The OROCA is based on the highest known terrain feature or obstruction in each quadrangle, bounded by the ticked lines of latitude/longitude including data 4 NM outside the quadrant. In this example the OROCA represents 12,500 feet.

OROCA is computed just as the Maximum Elevation Figure (MEF) found on Visual Flight Rule (VFR) Charts except that it provides an additional vertical buffer of 1,000 feet in designated non-mountainous areas and a 2,000 foot vertical buffer in designated mountainous areas within the United States. Evaluating the area around the quadrant provides the chart user the same lateral clearance an airway provides should the line of intended flight follow a ticked line of latitude or longitude. OROCA altitudes are not assessed for NAVAID signal coverage, air traffic control surveillance, or communications coverage, and are published for general situational awareness, flight planning, and in-flight contingency use. OROCAs can be found over all land masses and open water areas containing man-made obstructions (such as oil rigs).

125

MILITARY TRAINING ROUTES (MTRs)

Military Training Routes (MTRs) are routes established for the conduct of low-altitude, high-speed military flight training (generally below 10,000 feet MSL at airspeeds in excess of 250 knots Indicated Air Speed). These routes are depicted in brown on IFR Enroute Low Altitude Charts, and are not shown on inset charts or on IFR Enroute High Altitude Charts. IFR Enroute Low Altitude Charts depict all IFR Military Training Routes (IRs) and VFR Military Training Routes (VRs), except those VRs that are entirely at or below 1,500 feet AGL.

MTRs are identified by designators (IR-107, VR-134) that are shown in brown on the route centerline. Arrows are shown to indicate the direction of flight along the route. The width of the route determines the width of the line that is plotted on the chart:

Route segments with a width of 5 NM or less, both sides of the centerline, are shown by a .02" line.

IR 000 →

Route segments with a width greater than 5 NM, either or both sides of the centerline, are shown by a .035" line.

VR 000 →

MTRs for particular chart pairs (ex. L1/2, etc.) are alphabetically, then numerically tabulated. The tabulation includes MTR type and unique identification and altitude range.

JET ROUTE SYSTEM (HIGH ALTITUDE ENROUTE CHARTS)

Jet routes are based on VOR or VORTAC NAVAIDs, and are depicted in black with a "J" identifier followed by the route number (e.g., "J12"). In Alaska, Russia and Canada some segments of jet routes are based on LF/MF NAVAIDs.

AREA NAVIGATION (RNAV) "Q" ROUTE SYSTEM (IFR ENROUTE HIGH ALTITUDE CHARTS)

The FAA has adopted certain amendments to Title 14, Code of Federal Regulations, which paved the way for the development of new area high altitude navigation (RNAV) "Q" routes in the U.S. National Airspace System (NAS). These amendments enable the FAA to take advantage of technological advancements in navigation systems such as the GPS. RNAV "Q" Route MEAs are shown when other than FL 180 MEAs for DME/DME/Inertial Reference Unit (IRU) RNAV aircraft have a "D" suffix.




RNAV routes and associated data are charted in blue."Q" Routes on the IFR Gulf of Mexico charts are shown in black. Magnetic reference courses are shown originating from a waypoint, fix/reporting point, or NAVAID.

Joint Jet/RNAV route identification boxes will be located adjacent to each other with the route charted in black. With the exception of Q-Routes in the Gulf of Mexico, GNSS or DME/DME/IRU RNAV are required, unless otherwise indicated. Q-Routes in Alaska are GNSS Only. Altitude values are stacked highest to lowest.



FOREIGN AREAS

Limited data is depicted in areas outside the U.S. on all appropriate Enroute U.S., Alaska and Pacific High/Low IFR aeronautical charts. The data provided outside the U.S. is for situational awareness and transition planning. Areas outside of the U.S. have been skeletonized and sybmolized in black and/or a black screen applied. This highlights the intent that U.S. charts should only be used for navigation within domestic airspace and charts of other countries should be used within their respective airspace.

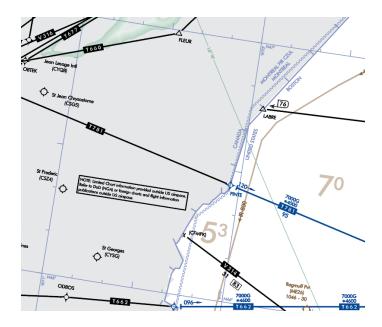

TERRAIN CONTOURS ON AREA CHARTS

Based on a recommendation of the National Transportation Safety Board, terrain contours have been added to the Enroute Area Charts and are intended to increase pilots' situational awareness for safe flight over changes in terrain. The following Area Charts portray terrain: Anchorage, Denver, Fairbanks, Juneau, Los Angeles, Nome, Phoenix, San Francisco, Vancouver and Washington.

When terrain rises at least a 1,000 feet above the primary airports' elevation, terrain is charted using shades of brown with brown contour lines and values. The initial contour will be 1,000 or 2,000 feet above the airports' elevation. Subsequent intervals will be 2,000 or 3,000 foot increments.

Contours are supplemented with a representative number of spots elevations and are shown in solid black. The highest elevation on an Area Chart is shown with a larger spot and text.

The following boxed note is added to the affected Area Charts.

NOTE: TERRAIN CONTOURS HAVE BEEN ADDED TO THOSE AREA CHARTS WHERE THE TERRAIN ON THE CHART IS 1000 FOOT OR GREATER THAN THE ELEVATION CE THE DULADY AIRPORT

IFR ENROUTE LOW / HIGH ALTITUDE SYMBOLS (U.S., PACIFIC AND ALASKA CHARTS)

AIRPORTS

Airport Data - Low/High Altitude

Civil Charts: High/Low



Seaplane - Civil

Charts: Low



Civil And Military

Charts: High/Low

Heliport





Military

Emergency Use Only Charts: High/Low



Facilities in BLUE or GREEN have an approved Instrument Approach Procedure and/or RADAR MINIMA published in either the FAA Terminal Procedures Publication or the DoD FLIPs. Those in BLUE have an Instrument Approach Procedure and/or RADAR MINIMA published at least in the High Altitude DoD FLIPs. Facilities in BROWN do not have a published Instrument Procedure or RADAR MINIMA. Facilities in BLACK are foreign airports.

All IAP Airports are shown on the Low Altitude Charts.

Non-IAP Airports shown on the U.S. Low Altitude Charts have a minimum hard surface runway of 3000'.

Airports shown on the U.S. High Altitude Charts have a minimum hard surface runway of 5000'.

Airports shown on the Alaska High Altitude Charts have a minimum hard or soft surface runway of 4000'.


Associated city names for public airports are shown above or preceding the airport name and city name are the same only the airport name is shown. City names for military and private airports are not shown.

The airport identifier in parentheses follows the airport name or Pvt.

Pvt - Private Use

AIRPORT DATA DEPICTION

Low Altitude



- 1. Airport elevation given in feet above or below mean sea level
- 2. Pvt Private use, not available to general public
- 3. A solid line box enclosed the airport name indicates FAR 93 Special Requirements - see Directory/Supplement
- 4. "NO SVFR" above the airport name indicates FAR 91 fixedwing special VFR flight is prohibited.
- 5. C or D following the airport identifier indicates Class C or Class D Airspace

High Altitude - U.S.



- 6. Associated city names for public airports are shown above or preceding the airport name. If airport name and city name are the same, only the airport name is shown. The airport identifier in parentheses follows the airport name. City names for military and private airports are not shown.
- 7. Airport Ident ICAO Location Indicator shown outside contiguous U.S.
- 8. AFIS Alaska only

High Altitude - Alaska



Airports (Continued)

LIGHTING CAPABILITY

- L Lighting Available
- (L) Pilot Controlled Lighting

- ★ Part-time or on request
- No lighting available
 At private facilities- indicates no lighting information is available

RADIO AIDS TO NAVIGATION

NAVAIDS

VOR	VOR/DME	TACAN	DME	NDB	NDB/DME	Reporting Function
\bigcirc		\Diamond		•		Non Compulsory Reporting or Off Airway
						Compulsory Reporting

Note: VHF/UHF is depicted in Black. LF/MF is depicted in Brown. RNAV is depicted in Blue

Compass Roses

VHF/UHF




LF/MF



Compass Roses are oriented to Magnetic North of the NAVAID that cannot be adjusted to the charted isogonic values.

Compass Locator Beacon



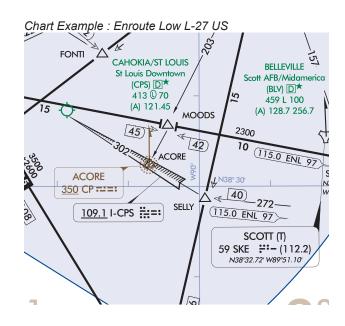


LOW ALTITUDE ILS Localizer Example with Back Course **ILS LOCALIZER** (Chart: Enroute Low L-1 US) ILS Localizer Course with additional navigation function **1**3 MCCOY ILS Localizer Back Course with BACK COURSE additional navigation function HIGH ALTITUDE - ALASKA **VOR/DME RNAV WAYPOINT DATA** Coordinates MC MINNVILLE 122.6 20 NOWEL **TURNO** N60°29.04' W148°28.51 266 SL::-.. McNary Fld 115.3 MDO 297.8°-90.5 (SLE) Ď★ 213 Û 58 133 110.3 I-SLE 40 (7S5) 180 Û 31 ASOS 124.55 Radial/Distance (A) 124.55 (Facility to Waypoint) 45 Identifier Reference Facility Elevation CRAAF ADLOW T274 5000SW Albany Muni MAGOT 227 Û 30 GLORR **NAVIGATION AND COMMUNICATION BOXES - COMMON ELEMENTS LOW ENROUTE CHARTS** HIGH ENROUTE CHARTS 0.000 0.000 **RCO Frequencies RCO Frequencies NAVAID Name** NAME NAME (VL) (T) NAVAID Name, SSV(s) Frequency, Ident, SSV(s), Channel 000.0 IDT (H) (DL) 000 FREQ. Ident. CH. Morse Code 000.0 IDT 000 **≌** · · Latitude, Longitude N00°00.00 Latitude, Longitude N00°00.00' W000°00.00' W000°00.00' Controlling FSS Name NAME NAME Controlling FSS Name **COMMON ELEMENTS (HIGH AND LOW CHARTS)** 122.6 **RCO Frequency** Single Frequency

Single Frequency Multiple Frequencies Frequencies transmit and receive except those followed by R and T: R - Receive Only T - Transmit Only

NAVAID Box

Thin line NAVAID boxes without frequency(s) and FSS radio name indicates no FSS frequencies available.

Shadow NAVAID box indicates NAVAID and Flight Service Station (FSS) have same name.

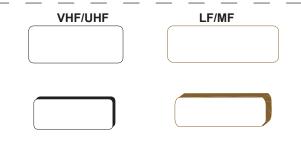

Navigation and Communication Boxes - Common Elements

NAVAID STANDARD SERVICE VOLUME (SSV) CLASSIFICATIONS

(VL), (T), etc. indicate SSV. See "NAVAID STANDARD SERVICE VOLUME (SSV) CLASSIFICATIONS" on page 64 or the Chart Supplement for SSV Altitude and Range Boundaries.

(T) (L) (VL) (H) (VH) (DL) (DH)

DISTANCE MEASURING EQUIPMENT

Facilities that operate in the "Y" mode for DME reception

(Y)

VOICE COMMUNICATIONS VIA NAVAID

Voice Transmitted

No Voice Transmitted

112.6

111.0

VHF/UHF

NAVAID SHUTDOWN STATUS

PART TIME OR ON-REQUEST

AUTOMATED WEATHER BROADCAST SERVICES

ASOS/AWOS - Automated Surface Observing Station/Automated Weather Observing Station

VHF/UHF LF/MF

A

LATITUDE AND LONGITUDE

Latitude and Longitude coordinates are provided for those NAVAIDs that make up part of a route/airway or a holding pattern. All TACAN facilities will include geographic coordinates.

N00°00.00' W000°00.00'

HIGH ENROUTE

LF/MF

- N00°00.00' -W000°00.00'

Navigation and Communication Boxes - Examples

LOW ENROUTE CHARTS

HIGH ENROUTE CHARTS

117.9 VQQ (H) N30°12.78' W81°53.45'

VOR

R - Receive only 122.1R

Controlling FSS Name - ANDERSON

122.1R

ALLENDALE (L)
116.7 ALD ::N33'00.75' W81'17.53'

ANDERSON

(T) - Service Volume

POLK (T) 108.4 FXU **∺**⊡∸

Receive & Transmit on 122.35
(T) - Service Volume
Latitude and Longitude
Controlling FSS Name - MACON

122.35

TIFT MYERS (T)

112.5 IFM ::=•
N31"25.72" W83"29.33"

| MACON |

CECIL

VOR

Navigation And Communication Boxes - Examples (Continued)

LOW ENROUTE CHARTS

HIGH ENROUTE CHARTS

VOR/DME

No Voice Communications (Y) Mode DME

SAWMILL (H)(H) 113.75 SWB 84(Y) ≅∺...

R - Receive only 122.1R Controlling FSS Name - BUFFALO 122.1R

ROCKDALE (L)(L)

112.6 RKA 73

∴

N42°27.98° W75° 14.36′

| BUFFALO |

Shadow NAVAID Box FSS Associated with NAVAID 119.1 MIRABEL (L)(L) 116.7 YMX 114 ≘∺□ N45°53.30′ W74°22.54′

S Associated with NAVAID

TACAN

TACAN Channels are without voice but not underlined

Pensacola (L) *119 NPA ≅-(117.2) №0021.48 W8718.99

VORTAC

Shutdown status

BRUNSWICK (L)(L)

NHZ = • . .

(####)

N43'52.41' W69'55.31'

DME

DME Channel, Ident, Morse Code, VHF Frequency

MOULTRIE (L) 25 MGR ₹₹ (108.8) N31°04.94 W83°48.25'

NDB

A - ASOS/AWOS Available

SILVER BAY A 350 BFW 1144

Shutdown status

NDB/DME

No Voice Communications (Y) Mode DME

122.3

CAPE LISBURNE

385 LUR 20(Y) (108.35) ::::

N68*52.28 W166*04.56*

Shadow NAVAID Box FSS Associated with NAVAID 123.6

ILIAMNA

411 ILI 91 (114.4) :--
N59°44.88' W154°54.58'

VOR/DME

Off Route (Greyed NAVAID Box and NAVAID)

DME in Y Mode

Shadow NAVAID Box FSS Associated with NAVAID

119.1 MIRABEL 116.7 YMX (L)(L) 114 N45°53.30

ITHACA 111.8 ITH (L) (DL) 55

ELMIRA 109.65 ULW (L)(L) 33(Y)

TACAN

Off Route

Off Route - Part Time NAVAID (Greyed NAVAID Box and NAVAID)

PENSACOLA 119 NPA (L) (117.2) N30°21.48" W87°18.99

TYNDALL

64 PAM (H) (133.7)

W85°34.34'

VORTAC

Off Route (Greyed NAVAID Box and NAVAID)

HANDLE 114.3 HLL (L) (DL) 90

DME

DME Channel, Ident, VHF Frequency DUNKIRK 109 DKK (H) (116.2)

NDB

FORT DAVIS 529 FDV N64°29.68' W165°18.91'

NDB/DME

No Voice Communications (Y) Mode DME

CAPE NEWENHAM
385 EHM 18(Y) (108.15)

N58°39.36'
W162°04.42'

Shadow NAVAID Box FSS Associated with NAVAID ILIAMNA 411 ILI 91 (114.4)

Notes: Morse Code is not shown on High NAVAID Boxes.

Stand Alone Flight Services and Communication Outlets

Flight Service Station (FSS)

Shadow NAVAID boxes indicate Flight Service Station (FSS) locations. Frequency 122.2 (Conterminous U.S) and 121.5 and 243.0 (Alaska) are available at many FSSs and are not shown. All other frequencies are shown above the box.

Certain FSSs provide Local Airport Advisory (LAA) on 123.6.

Frequencies transmit and receive except those followed by R and T:

R - Receive Only

T - Transmit Only

LOW CHARTS HIGH CHARTS Stand Alone FSS Stand Alone FSS 122.55 DAYTON DAY HARBOR HBR

MON


Miami Exec

(TMB) 122.55

MIAMI MIA


Stand Alone FSS Associated with an Airport

Stand Alone FSS Associated with an Airport (TMB) D* 10 0 60 (A) 124.0 MIAMI MIA



Remote Communications Outlet (RCO)

Thin line NAVAID boxes without frequencies and controlling FSS name indicate no FSS frequencies available. Frequencies positioned above the thin line boxes are remoted to the NAVAID sites. Other frequencies at the controlling FSS named are available, however altitude and terrain may determine their reception.



RCO Associated/Co-located with RCO Associated/Co-located with an Airport an Airport FORT MYERS Page Fld (FMY) D * BURLINGTON 122.4 **GLENS FALLS** (A) 123.725 Floyd Bennett Meml (GFL) MIAMI 122.65 122.2 122.1R

Stand Alone AWOS & ASOS



-0-0-0-0-0-0

publication for specific

information.

See NOTAMs or appropriate

AIRSPACE INFORMATION

Airway/Route Types
Low and High Enroute Airway Data:

VHF/UHF Data is depicted in Black. LF/MF Data is depicted in Brown. RNAV Route data is depicted in Blue

Low Enroute Charts High Enroute Charts 1000 **Jet Routes Victor Airways** A0 - ARO - ARO -LF/MF Airway **Atlantic Routes** BROL - BROL **RNAV T Route Bahama Routes GNSS Required** Q00 **RNAV Q Routes** TKOOO: **RNAV TK Helicopter Route** Alaska Q Routes require GNSS and radar surveillance. Within the CONUS, GNSS or DME/DME/IRU RNAV required, unless other-**GNSS Required** wise indicated. DME/DME/IRU aircraft require radar surveillance. **Preferred Direction Jet Routes Preferred Direction Victor Route Unusable Route Segment** Preferred Direction RNAV Q Routes Military Training Routes (MTR) Preferred Direction ATS Route MTRs 5NM or less both sides IR-000 → of centerline VR-000 → **Unusable Route Segment** MTRs greater than 5NM either IR-000 → or both sides of centerline VR-000 → Arrow indicates direction of route See MTR tabulation for altitude range information All IR and VR MTRs are shown except those VRs at or bleow 1500' AGL CAUTION: Inset charts do not depict MTRs Low and High Enroute Charts

Substitute Route

shown in brown.

All relative and supporting data

Α0

ATS Route

Oceanic Route

A0

-A00 -A00 -

VHF/UHF	LF/MF	REPORTING FUNCTION Compulsory Position Reporting	WAYPOINTS RNAV
\triangle	Δ	Non-Compulsory Position Reporting	→
N25°46.47' W76°16.28'	N29°36.00′ W88°01.00′	Fix or Waypoint Coordinates Fix Coordinates are shown for compulsory, offshore and holding fixes.	N44°25.36' W64°11.00'
		Waypoints Coordinates are shown when waypoint is not part of a RNAV route and when located on or beyond the boundary of the U.S. Continental Control (12 mile limit).	
→ <u> </u>		Off-set arrows indicate facility forming a fix - Arrow points away from the VHF/UHF NAVAID - Arrow points towards the LF/MF NAVAID	N/A
	- △	Distance Measuring Equipment (DME) Fix Denotes DME fix (distance same as airway / route mileage)	
VHF/U	JHF	Distance Measuring Equipment (DME) Fix	RNAV
15)	→	Denotes DME fix (encircled mileage shown when not otherwise obvious)	N/A
		Example:	NI/A
	O 15) ► △	First segment, 5NM; second segment 10NM; total milage provided in encircled DME arrow.	N/A
VHF/UHF	LF/MF		RNAV
229	149	Total Mileages between Compulsory Reporting Points or NAVAIDs	N/A
		Note: All mileages are in Nautical Miles	
 54	125	MILEAGE BETWEEN OTHER FIXES, NAVAIDS AND/OR MILEAGE BREAKDOWN	125
X (AFWOX)	X (MSABI)	Mileage Breakdown or Computer Navigation Fix (CNF) Five letter identifier in parentheses indicates CNF with no ATC function	N/A
000.0 IDT 000	000 ID	FACILITY LOCATOR BOATS	N/A
000000 IDT 0000	(3)300 ID	Crosshatch indicates Shutdown status of NAVAID	
		RADIAL OUTBOUND FROM A VHF/UHF NAVAID	
	N/A	All Radials are magnetic.	
		BEARING INBOUND TO AN LF/MF NAVAID	
N/A	000	All Bearings are magnetic.	
	N/A	MAGNETIC REFERENCE BEARING, outbound from a NAVAID or Fix Note: Not shown on joint Victor/RNAV or Jet/RNAV Routes.	000-


Airspace Information (Continued) VHF/UHF **RNAV** MINIMUM ENROUTE ALTITUDE (MEA) LOW CHARTS LOW CHARTS LOW CHARTS All Altitudes Are MSL Unless Otherwise Noted. 0000 0000 0000G **Directional MEAs** HIGH CHARTS HIGH CHARTS HIGH CHARTS MEAs are shown on IFR High Altitude Charts when MEA is MEA for GNSS RNAV MEA-29000 MEA-FL240 other than 18,000'. aircraft MEA-24000G MEA for DME/DME/IRU RNAV aircraft MEA-24000D MINIMUM ENROUTE ALTITUDE (MEA) GAP LOW CHARTS N/A 15000 MEA is established when there is a gap in navigation signal * 13300 coverage. 35 114 HIGH CHARTS MFA-24000 279 Maximum Authorized Altitude (MAA) LOW / HIGH LOW / HIGH LOW / HIGH All Altitudes Are MSL Unless Otherwise Noted. **CHARTS CHARTS CHARTS** MAAs are shown on IFR High Altitude Charts when MAA is MAA-00000 MAA-00000 MAA-00000 other than 45,000'. **Minimum Obstruction Clearance Altitude (MOCA)** LOW CHARTS LOW CHARTS LOW CHARTS All Altitudes Are MSL Unless Otherwise Noted. *0000 *0000 *0000 Minimum Turning Altitude (MTA) and Minimum LOW CHARTS LOW CHARTS LOW CHARTS **Crossing Altitude (MCA)** X See Low Enroute Chart Example below for examples of both MTAs and MCAs. MINIMUM RECEPTION ALTITUDE (MRA) N/A **ALTITUDE CHANGE** MEA, MOCA and/or MAA change at other than NAVAIDs N/A LOW / HIGH **CHANGEOVER POINT** LOW / HIGH **CHARTS CHARTS** Changeover Point giving mileage to NAVAIDs (Not shown at midpoint locations.) HOLDING PATTERNS RNAV Holding Pattern Magnetic Reference Bearing is determined by the isogonic value at the waypoint or fix. Holding Pattern with maximum restriction airspeed 210K applies to altitudes 6000' to and including 14000'. 175K ap-210K plied to all altitudes. Airspeed depicted is Indicated Airspeed

(IAS)

Enroute Chart Examples


Low Enroute Chart

FAA Chart Users' Guide - IFR Enroute Symbology

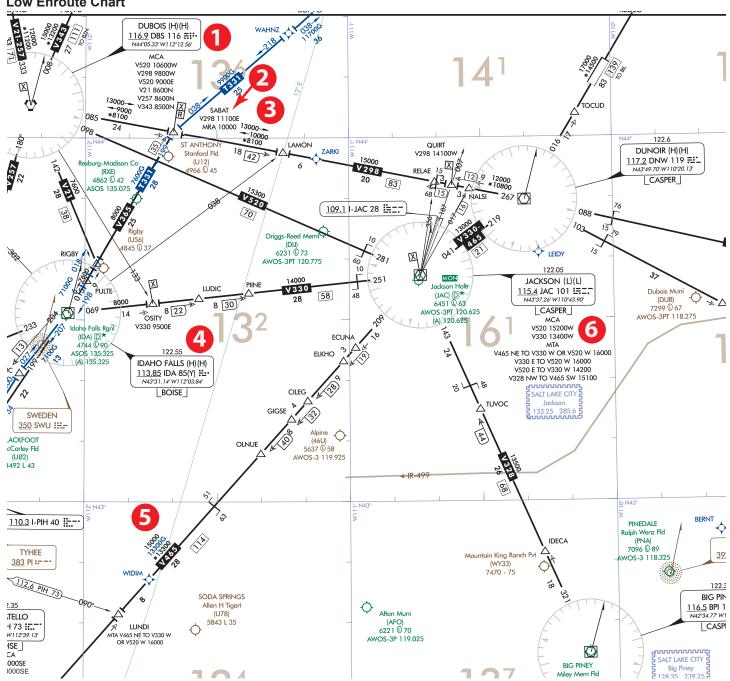

Enroute Chart Examples Low Enroute Chart (Continued)

Reference Number

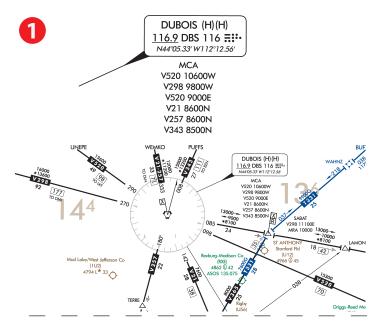

Description

Multiple MCAs at a NAVAID


V21 and V257 - MCA at DBS of 8600' traveling North

V298 - MCA at DBS of 9800' traveling West

V343 - MCA at DBS of 8500' traveling North


V520 - MCA at DBS of 9000' traveling East

V520 - MCA at DBS of 10600' traveling West

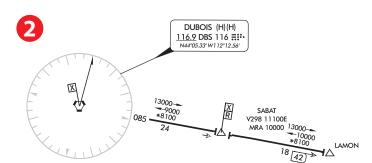

MCA and MRA at a Fix

MCA at SABAT on V298 of 11,100 traveling East. MRA at SABAT of 10000.

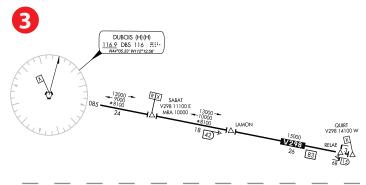


Example of MOCA and directional MEAs along a Victor Route

Traveling East from DBS, MEA 13,000' the first two segments, 15,000 along third segment.

Traveling West from QUIRT, MEA of 15,000' the first segment, MEA of 10,000 the second segment and MEA of 9,000 the third segment.

 MOCA for DBS to SABAT and SABAT to LAMON segments of 8100

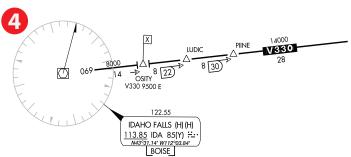

MCA Example

MCA at OSITY on V330. MCA of 9500' traveling East on V330 from Idaho Falls (IDA) VOR-DME.

Enroute Chart Examples


Low Enroute Chart (Continued)

Reference Number





6

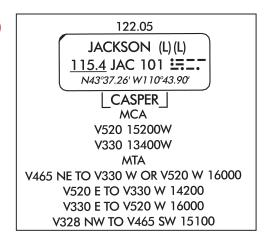

Description

MEA VHF and RNAV Example

MEA for aircraft utilizing VHF NAVAID of 15000' MEA for aircraft utilizing RNAV of 13300'

MOCA of 13300'

MCA and MTA Example at a NAVAID

MCA for aircraft traveling West along V520 to cross JAC at 15200' MCA for aircraft traveling West along V330 to cross JAC at 13400'

MTA for aircraft crossing over and turning at JAC:

Aircraft traveling NE on V465 and turning to V330 on a W heading or turning to V520 on a W heading must turn at altitude of 16000' or higher


Aircraft traveling E on V520 and turning to V330 on a W heading must turn at altitude of 14200'

Aircraft traveling E on V330 and turning to V520 on a W heading must turn at altitude of 16000' or higher

Aircraft traveling NW on V328 and turning to V465 on a SW heading must turn at altitude of 15100' or higher.


Airspace Information (Continued)

Enroute Chart Examples

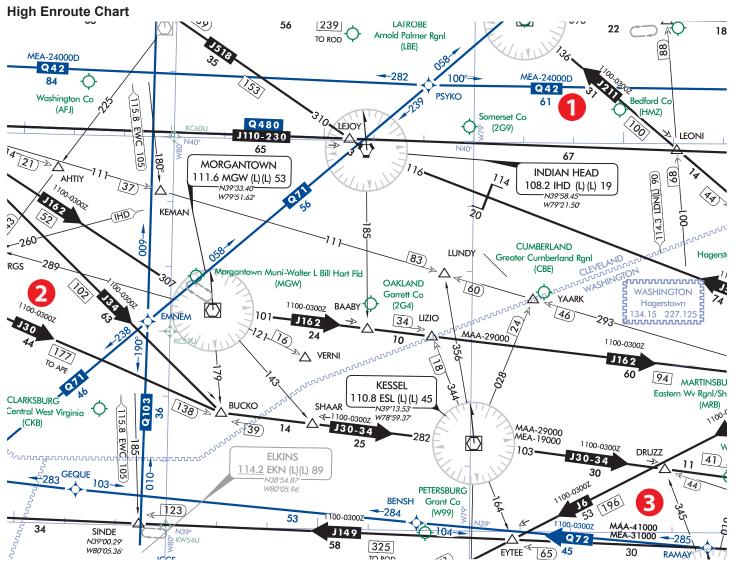

Reference Number

PSYKO Somerset Co (2G9) MEA-24000D AMEA-24000D AMEA-2400D AMEA-240D AMEA-24

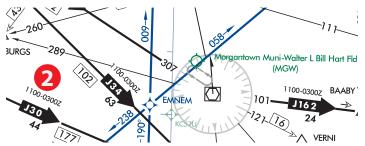

Description

High RNAV Route with MEA for DME/DME/IRU RNAV Aircraft


MEA of 24,000'

Preferred Directional Jet Route with Time Restrictions

Jet Route 34 available between 1100 - 0300Z

Enroute Chart Examples High Enroute Chart (Continued)

Reference Number

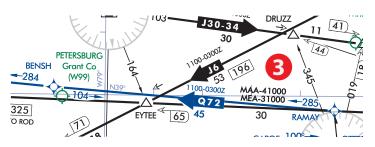

Description

Preferred Directional Jet Route with Time Restrictions, MAA and MEA

Jet Route 149 available between 1100 - 0300Z MAA - 41,000' MEA - 31,000'

AIRSPACE BOUNDARIES

Air Defense Identification Zone (ADIZ)

ALASKA ADIZ

CANADA ADIZ

Adjoining ADIZ

LOW / HIGH CHARTS

Air Traffic Service Identification Data

LOW / HIGH CHARTS





Flight Information Regions (FIR)

LOW / HIGH CHARTS



Upper Information Regions (UIR)

Upper Control Areas (UTA)



Air Route Traffic Control Center (ARTCC)

ARTCC Remoted Sites with discrete VHF and UHF frequencies



LOW / HIGH CHARTS

Air Route Traffic Control Center (ARTCC) with Controller Pilot Data Link Communications (CPDLC)



CPDLC (LOGON KUSA)
ATLANTA
LYTTOMOREM STANDARD S

Altimeter Setting Change



Control Areas (CTA)




_ _

Additional Control Areas

LOW ALTITUDE

HIGH ALTITUDE



Foreign Airspace Note

NOTE: Limited chart information provided outside U.S. airspace. Refer to DoD (NGA) or foreign charts and flight information publications outside U.S. airspace.

Airspace - U.S.

Class A

Open Area (White)

High Chart Only

Controlled Airspace


That airspace from 18,000' MSL to and including FL 600, including the airspace overflying the waters within 12 NM of the coast of the contiguous United States and Alaska and designated offshore areas, excluding Santa Barbara Island, Farallon Island, the airspace south of latitude 25° 04'00" N, the Alaska peninsula west of longitude 160°00'00" W, and the airspace less than 1,500' AGL.

That airspace from 18,000' MSL to and including FL 450, including Santa Barbara Island, Farallon Island, the Alaska peninsula west of longitude 160°00'00" W, and designated offshore areas.

Class B

Low Chart Only

Controlled Airspace

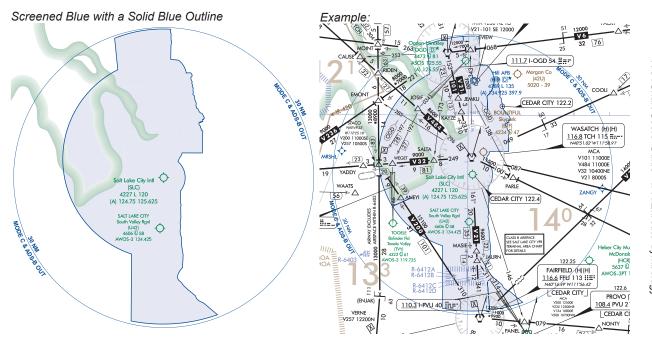

That airspace from the surface to 10,000' MSL (unless otherwise designated) surrounding the nation's busiest airports. Each Class B airspace area is individually tailored and consists of a surface area and two or more layers.

Mode C Area

A Solid Blue Outline

Low Chart Only

That airspace within 30 NM of the primary airports of Class B airspace and within 10 NM of designated airports. See Chart example above.

Controlled Airspace

Mode-C transponder and ADS-B Out equipment is required. (See FAR 91.215)

Example:

Airspace - U.S. (Continued)


CLASS C

Low Chart Only

Controlled Airspace



That airspace from the surface to 4,000' (unless otherwise designated) above the elevation of selected airports (charted in MSL). The normal radius of the outer limits of Class C airspace is 10NM. Class C airspace is also indicated by the letter C in a box following the airport name.

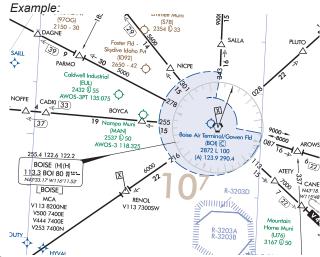

CLASS D

Low Chart Only


Controlled Airspace Open Area (White)

Hagerstown RgnlRichard A Henson Fld
(HGR) *

703 *

70 ASOS 126.375

That airspace from the surface to 2,500' unless otherwise designated) above the airport elevation (charted in MSL), surrounding those airports that have an operational control tower. Class D airspace is indicated by the letter D in a box following the airport name.

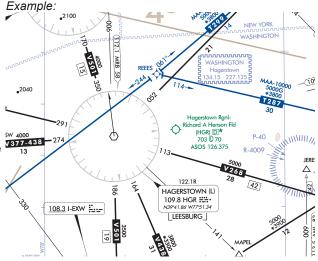

Airspace Information (Continued)

AIRSPACE - U.S.

CLASS E

Open Area (White)

Low Chart Only

The controlled airspace below 14,500' MSL that is not

Controlled Airspace Class B, C or D.

Federal Airways from 1,200' AGL to but not including 18,000' MSL (unless otherwise specified).

Other designated control areas below 14,500' MSL.

Not Charted

That airspace from 14,500' MSL to but not including 18,000' MSL, including the airspace overflying the waters within 12 NM of the coast of the contiguous United States and Alaska and designated offshore areas, excluding the Alaska peninsula west of longitude 160°00'00" W, and the airspace less than 1,500' AGL.

CLASS G

High and Low Chart

Uncontrolled Airspace




Low Altitude

That portion of the airspace below 14,500' MSL that has not been designated as Class B, C, D or E Airspace.

High Altitude

That portion of the airspace from 18,000' MSL and above that has not been designated as Class A airspace.

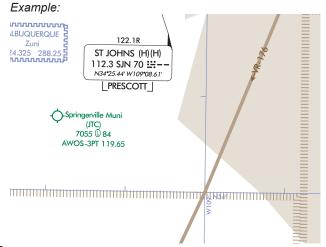

Special Use Airspace - U.S.


Low and High Charts P - Prohibited Area

Example: P-56 -

Washington DC, Area A-1 Chart



Example: P-40 and R-4009 - Washington DC, Area A-1 Chart



R - Restricted Area

Example: R3601A -


Example: W-50




W - Warning Area

See Airspace Tabulation on each chart for complete documentation information on:

Area Identification
Effective Altitude
Operating Times
Controlling Agency Voice Call





Low Charts Only

A - Alert Area

* Alert Areas do not extend into Class A, B, C and D airspace, or Class E airport surface areas.

MOA - Military Operations Area

See Airspace Tabulation on each chart for complete documentation information on:
Area Identification
Effective Altitude
Operating Times
Controlling Agency Voice Call








Off Route Obstruction Clearance Altitude (OROCA)

Low Charts Only

Example: 12,500 feet


125

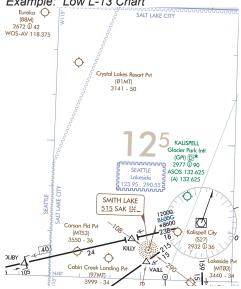


Special Flight Rules Area (SFRA)

Low and High Charts SFRA Symbology



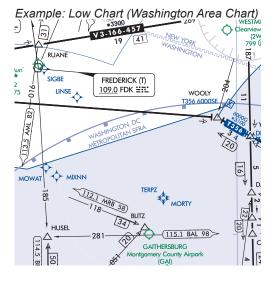

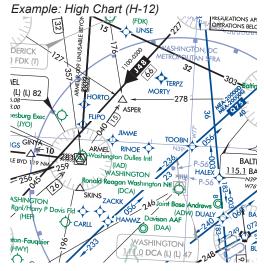

NAVIGATIONAL AND PROCEDURAL INFORMATION

Cruising Altitudes - Low Charts - U.S. Only

IFR outside controlled airspace.

IFR within controlled airspace as assigned by ATC.

ALL courses are magnetic.




VFR above 3000' AGL unless otherwise authorized by ATC.

Cruising Altitudes - High Charts - U.S. Only

IFR within controlled airspace as assigned by ATC

All courses are magnetic.


18,000' MSL to FL280



VFR or VFR On Top add 500'


No VFR flights within Class A Airspace above 3000' AGL unless otherwise authorized

RVSM Levels FL290 to FL410




No VFR or VFR On Top authorized above FL285 in RVSM airspace.

FL430 and above



Navigational and Procedural Information (Continued)

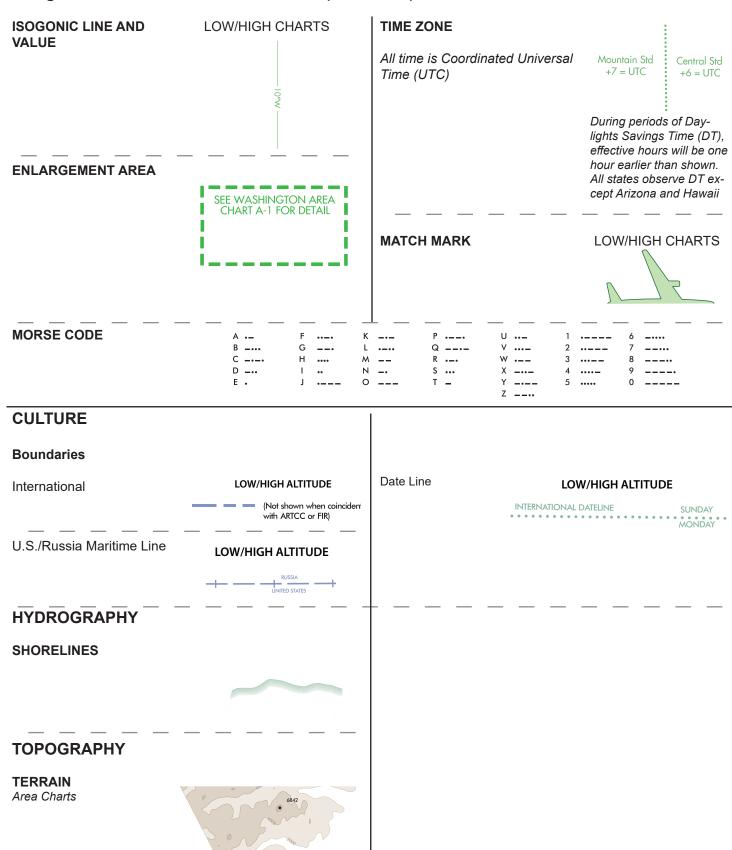

U.S. TERMINAL PROCEDURES PUBLICATION

The U.S. Terminal Procedures Publication (TPPs) includes the Instrument Approach Procedures (IAPs), Departure Procedures (DPs) charts, Standard Terminal Arrival (STAR) charts, Charted Visual Flight Procedure (CVFP) charts, and Airport Diagrams. Also included are Takeoff Minimums, (Obstacle) Departure Procedures, Diverse Vector Area (RADAR Vectors), RADAR and Alternate Minimum textual procedures.

EXPLANATION OF TPP TERMS AND SYMBOLS

The information and examples in this section are based primarily on the IFR (Instrument Flight Rules) Terminal Procedures Publication (TPP). The publication legends list aeronautical symbols with a brief description of what each symbol depicts. This section will provide more detailed information of some of the symbols and how they are used on TPP charts.

FAA Terminal charts are prepared in accordance with specifications of the Interagency Air Committee (IAC) and their supporting technical groups for the purpose of standardization, which are approved by representatives of the Federal Aviation Administration (FAA), and the Department of Defense (DoD).


The Terminal Procedure Publication is made up of the following charts:


- Instrument Approach Procedure (IAP) Charts
- Airport Diagrams
- Departure Procedures (DP)
- Standard Terminal Arrival (STAR) Charts
- · Charted Visual Flight Procedure (CVFP) Charts

INSTRUMENT APPROACH PROCEDURE CHART

The IAPs (charts) are divided into various sections:

Margin Identification Information Briefing Strip Information Planview Missed Approach Information Profile View Landing Minimums Airport Sketch

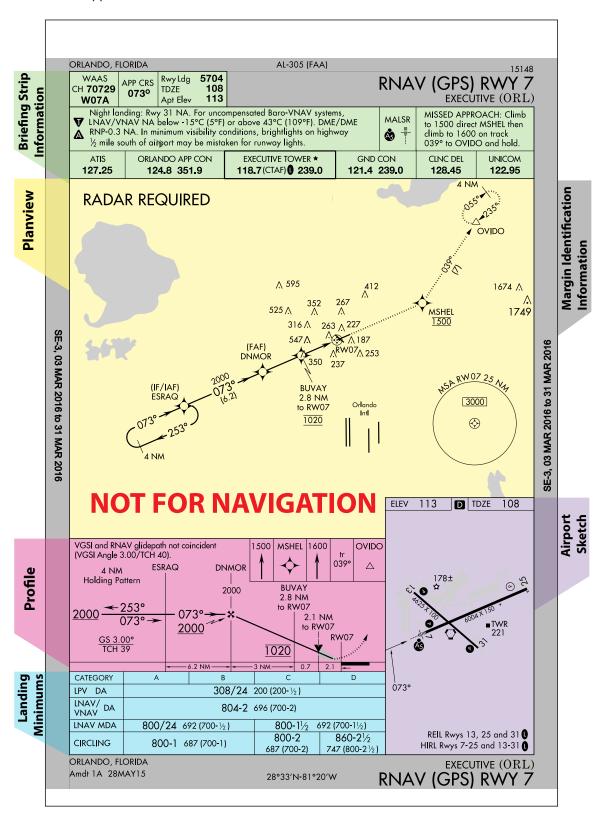

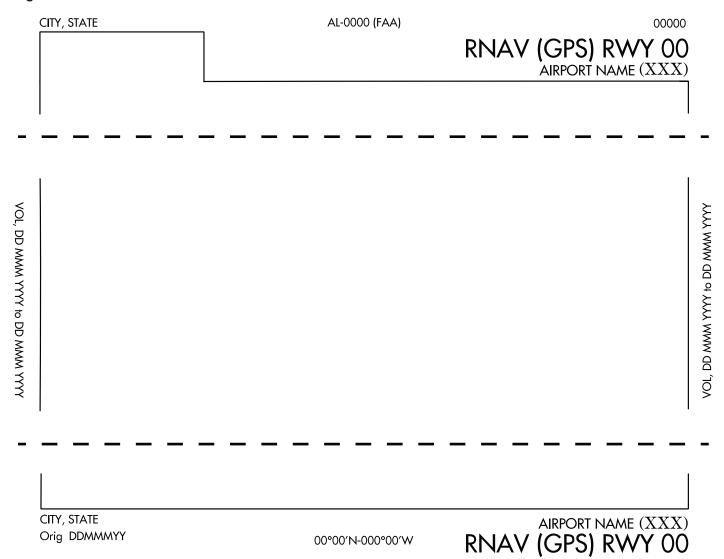

The margin identification at the top, bottom, and sides of the chart provides information about the airport location, procedure identification, and chart currency. The charts are organized by city first, then airport name and state, with the exception of military charts, which are organized by airport name. Going from the top of the chart, reading from left to right, and going down the chart, Margin Identification Information is organized in the following way.

The hash marks along the top and bottom borders of military Instrument Approach Charts indicate that the procedure was designed using High Altitude criteria contained in FAA Order 8260.3. These procedures are designed to support high performance military aircraft operations and are not intended for civilian use.



Top Margin Information:

The city and state with which the airport is associated are located on both the top and bottom margins.

At the center of the top margin is the FAA numbering system. This Approach and Landing (AL) number is followed by the organization responsible for the procedure in parentheses, e.g., AL-18 (FAA). Military procedures do no show an AL number, but do show the appropriate authority for the procedure, e.g., (USAF).

WASHINGTON, DC AL-5326 (FAA) 15344 RNAV (GPS) RWY 34L WAAS Rwy Ldg 3715 APP CRS CH **56239** 182 TD7F 326° MANASSAS RGNL/HARRY P DAVIS FLD $({\rm HEF})$ Apt Elev 192 **W34B**

The procedure title is located on both the top and bottom margins. It is derived from the type of navigational facility that is providing the final approach course guidance. The title is abbreviated, e.g. ILS, RNAV, NDB, etc. For airports with parallel runways and simultaneous approach procedures, "L", "R" or "C" follows the runway number to distinguish between left, right, and center runways.

The airport name is shown on both the top and bottom margins below the procedure title. The airport identifier is shown in parentheses following the airport name. Airports outside the contiguous United States will be shown with the FAA designated identifier followed by the ICAO location identifier.

The Date of Latest Revision is shown on the top margin above the procedure title. The Date of Latest Revision identifies the Julian date the chart was last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6).



15344 Year|Day of Year

Side Margin Information:

The side margins show the volume identification, i.e. SW-3, followed by the current issue date and the next issue date, e.g. SW-3, 21 JUL 2016 to 15 SEP 2016.

Bottom Margin Information:

The FAA Procedure Amendment Number, located on the left bottom margin below the City, State, represents the most current amendment of a given procedure. The Procedure Amendment Effective Date represents the AIRAC cycle date on which the procedure amendment was incorporated into the chart. Updates to the amendment number and effective date represent procedural/criteria revisions to the charted procedure, e.g., course, fix, altitude, minima, etc.

Example: Original Procedure Date

WASHINGTON, DC
Orig 10DEC15

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNAV (GPS) RWY 34L

Example: Amendment Procedure Date

WASHINGTON D.C.

Amdt 1B 28MAY15

WASHINGTON D.C.


AMANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNAV (GPS) RWY 16R

The coordinates for the airport reference point are located at the center of the bottom margin.


BRIEFING STRIP INFORMATION

At the top of every TPP is the Briefing Strip that consists of three stacked strips of information immediately above the planview. Information varies depending upon the type of procedure.

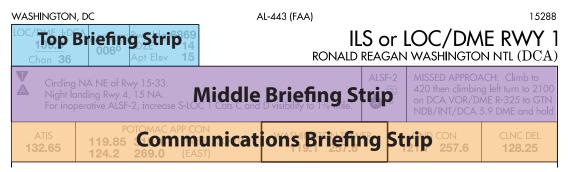

Top Briefing Strip

The top briefing strip contains procedural information in three separate boxes, in the following sequence from left to right:



- Box 1: Primary Procedure Navigation Information: The primary navigation type (VOR, LOC, NDB, RNAV, etc.)
 with its identifier and frequency/channel. If applicable, WAAS, the WAAS Channel Number, and the WAAS Reference Path indicator are shown stacked top to bottom. If the primary navigation type is GBAS, then the following information is shown, stacked top to bottom: GBAS, CH NNNN, RPI XXXX. If there is not a primary Navigation Box required, the first box is removed.
- Box 2: Final Approach Course Information. The inbound Approach Course (APP CRS) is shown.
- Box 3: Runway Landing Information: Stacked top to bottom, the runway landing distance (Rwy Ldg), the Touchdown Zone Elevation (TDZE), and the Airport Elevation (Apt Elev) are shown. Runway landing distance is determined by comparing the total runway length with the displaced threshold accounted for against the published Declared Distance Landing Distance Available (LDA). The shortest of these lengths, either the published Declared Distance LDA or the total runway length (minus displaced threshold) on the approach end of the runway, will be charted.

Top Briefing Strip Examples:

Ground based NAVAID:

DENVER, COLORADO						
LOC/DME I-DZG 111.55 Chan 52(Y)	APP CRS 082°	Rwy Ldg TDZE Apt Elev	12000 5352 5434			



RNAV-WAAS:

DENVER, COLORADO

WAAS CH 82628 W16B	APP CRS 173°	Rwy Ldg TDZE Apt Elev	16000 5326 5434
--	------------------------	-----------------------------	-----------------------

RNAV (GPS) Y RWY 16R

DENVER INTL (DEN)

GBAS:

NEWARK, NEW JERSEY

ADD CDS	Rwy Lda	8460
039°	TDZE Apt Elev	10 17
	APP CRS 039°	APP CRS Rwy Ldg TDZE Apt Elev

AL-285 (FAA)

18256

GLS RWY 4L NEWARK LIBERTY INTL (EWR)

No Primary NAVAID box:

DENVER, COLORADO

APP CRS 173°	Rwy Ldg TDZE Apt Elev	12000 5339 5434

16147

16203

RNAV (RNP) Z RWY 17L

DENVER INTL (DEN)

Circling Approach:

ROANOKE, VIRGINIA

VOR ODR 114.9	APP CRS 236°	Rwy Ldg TDZE Apt Elev	N/A N/A 1175
------------------	------------------------	-----------------------------	--------------------

AL-349 (FAA)

VOR/DME-A

ROANOKE-BLACKSBURG RGNL/WOODRUM FLD (ROA)

Sidestep Procedure:

LOS ANGELES, CALIFORNIA

LOC/DME I-OSS 108.5 Chan 22	APP CRS	RwyLdg TDZE Apt Elev	24R 8925 120 126	24L 9483 121 126
-----------------------------------	---------	----------------------------	--	---------------------------

AL-237 (FAA)

ILS or LOC RWY 24R
LOS ANGELES INTL (LAX)

Middle Briefing Strip

The middle briefing strip may contain information in up to three separate boxes, when available, in the following sequence from left to right:








	NOTES BOX	APPROACH LIGHTING	MISSED APPROACH
l	NOTES BOX	SYSTEM	PROCEDURE TEXT BOX

- **Box 1: Notes Box:** contains procedure notes, Equipment/Requirements Notes box and Takeoff, Alternate, RA-DAR, WAAS, and/or Cold Weather indicators (details provided below under Notes Box).
- Box 2: Approach Lighting System Box (when applicable): shows the approach lighting system name and
 charting icon. Multiple approach lighting systems may be shown for approaches that have straight-in minimums
 for parallel runways.
- Box 3: Missed Approach Procedure Text Box: The full textual description of the missed approach procedure is provided here.


Notes Box

Procedure Equipment Requirements Notes Box

Performance-Based Navigation (PBN) Requirements and ground-based Equipment Requirements are displayed in separate, standardized notes boxes. For procedures with PBN elements, the PBN box contains the procedure's navigation specification(s). If required, specific sensors or infrastructure needed for the navigation solution, additional or advanced functional requirements, and the minimum Required Navigation Performance (RNP) value and any amplifying remarks will also be included. Items listed in this PBN box are REQUIRED. The separate Equipment Requirements Box will list ground-based equipment requirements.



On procedures with both PBN elements and ground-based equipment requirements, the PBN requirements box is listed first.



Remote Altimeter Airport Notes

Approach minimums are based on the local altimeter setting for that airport unless annotated otherwise. When more than one altimeter source is authorized, and the minima are different, they will be shown by separate lines in the approach minima box or as a note in the briefing strip; e.g., use MHK altimeter setting; when not available use SLN altimeter setting and increase all MDAs 40 feet. The altimeter source location is referenced by the FAA airport identifier. An airport outside the contiguous U.S. will use both the FAA and ICAO identifiers. Until all charts reference the airport identifier, the notes may contain altimeter sources referenced by city name, city and state, or airport name.

Notes Symbols

Several different symbols may appear within the Notes Box:

- An entry is published in the Takeoff Minimums, (Obstacle) Departure Procedures, and Diverse Vector Area (Radar Vectors) section of the TPP.
- A Non-standard IFR alternate minimums exist. Refer to IFR Alternate Airport Minimums section of the TPP.
- The IAP may not be used as an alternate due to unmonitored facility, absence of weather reporting service, or lack of adequate navigation coverage. IAPs designated with this symbol are not listed in the IFR Alternate Minimums section of the TPP.
 - WAAS (Wide Area Augmentation System)
- ★-12°C Cold Temperature Airport

The negative within a black square box symbol shown in the Notes section below any "A" or "T" Symbol indicates that outages of the WAAS (Wide Area Augmentation System) vertical guidance may occur daily at this location due to initial system limitations. WAAS NOTAMs for vertical outages are not provided for this approach. Use LNAV minima for flight planning at these locations, whether as a destination or alternate. For flight operations at these locations, when the WAAS avionics indicate that LNAV/VNAV or LPV service is available, then vertical guidance may be used to complete the approach using the displayed level of service. Should an outage occur during the procedure, reversion to LNAV minima may be required.

When \$\frac{\text{\text{\$\color{12}^{\color{

When "ASR", "PAR" or "ASR/PAR" appear in the Note section immediately below the "T" and "A" symbols it indicates there are published Radar Instrument Approach Minimums. Where radar is approved for approach control service, it is used not only for radar approaches (Airport Surveillance Radar [ASR] and Precision Approach Radar [PAR]) but is also used to provide vectors in conjunction with published non-radar approaches based on radio NAVAIDs (ILS, VOR, NDB, TACAN). Radar vectors can provide course guidance and expedite traffic to the final approach course of any established IAP or to the traffic pattern for a visual approach.

Bottom Briefing Strip (Communications Information)

The communications briefing strip contains communication information when available, in separate boxes, listed from left to right in the order that they would be used during arrival with the tower frequency box bolded:

ATIS	APP CON	TOWER	GND CON	CLNC DEL	UNICOM
XXXXX	XXXX XXXX	XXXX XXXX	XXXXX	XXXXX	XXXXX

- ATIS, D-ATIS, AFIS (AK Only) or ASOS/AWOS frequencies (when available, ATIS or AFIS will be the only local weather frequency/s published)
- The primary Approach Control (APP CON) name and frequencies; when the primary approach service is provided by other than Approach Control, e.g. FSS (Radio), Tower, Center, the appropriate air traffic facility call name is provided
- The Control Tower (TOWER) name and frequencies, to include Precision Radar Monitoring (PRM) and frequency
- Ground Control (GND CON) frequencies
- Clearance Delivery (CLNC DEL) frequencies; where a Control Tower does not exist or is part-time, a remoted CLNC DEL may be listed.
- Ground Communications Outlet (GCO) frequency
- Common Traffic Advisory Frequency (CTAF), shown in parentheses when shares a frequency, e.g. UNICOM 122.8 (CTAF)
- UNICOM or AUNICOM frequency
- Controller Pilot Data Link Communication (CPDLC)

Note: Part-time operations will be annotated with a star. Check Chart Supplement for times of operation.

PLANVIEW

The planview of the IAP charts provides an overhead view of the entire instrument approach procedure.

The data on the planview is shown to scale, unless concentric rings, scale breaks or an inset have been used.


Planview Items

Approach Segments
NAVAIDs
Area Navigation (RNAV) Waypoints
Restrictive Airspeeds
Restrictive Altitudes
Holding Patterns and Procedure Turns
Airports
Relief (Terrain Features)

Hydrography
International Boundary
Obstacles (Man-made, Terrain and Vegetation)
Special Use Airspace
Minimum Safe Altitude
Terminal Arrival Areas
Helicopter (Copter) Procedures

Approach Segments


The planview includes a graphical depiction of procedure entry through missed approach.

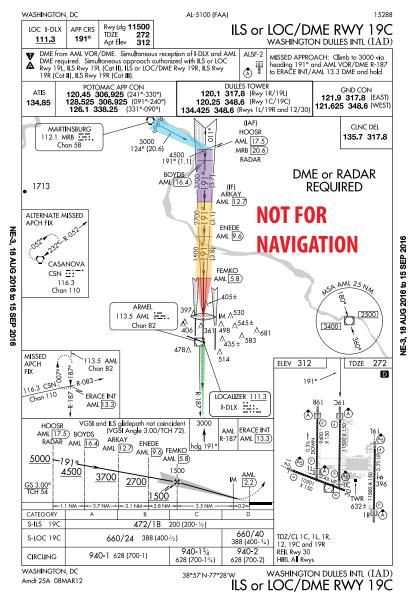

Simple IAP Example


Legend

Feeder Route Initial Approach Intermediate Approach Final Approach Course Missed Approach

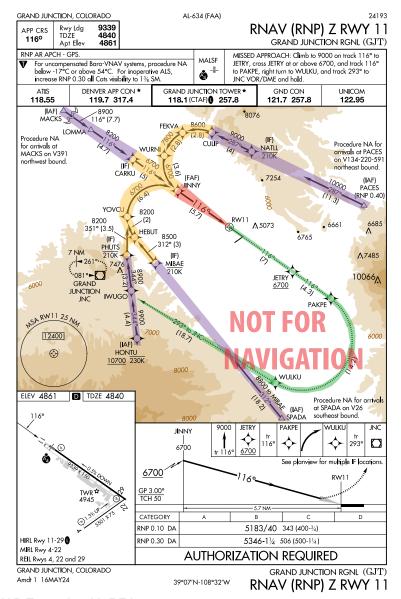


Complex IAP Example with RF Legs

- **Feeder Routes** (highlighted in blue See Simple IAP Example on previous page) may be used to provide a transition from the enroute structure to the IAF.
- **Initial Approach** (highlighted in purple in examples above) is the segment between the initial approach fix (IAF) and the intermediate fix (IF) or the point where the aircraft is established on the intermediate course or final approach course.
- **Intermediate Approach** (highlighted in yellow in examples above) is the segment between the intermediate fix or point and the final approach fix.
- **Final Approach Course** (highlighted in red in the examples above) is the segment between the final approach fix or point and the runway, airport, or missed approach point.
- Missed Approach (highlighted in green in the example above) begins at the MAP and continues until the designated fix or waypoint. The missed approach track is shown as a hash marked line in the planview. If any portion of the missed approach procedure track falls outside of the area of the planview it will be shown in a separate box in the planview.
- DME arcs or Radius-to-Fix legs (RF) are shown as smooth arcs from a designated start point to a designated terminus.

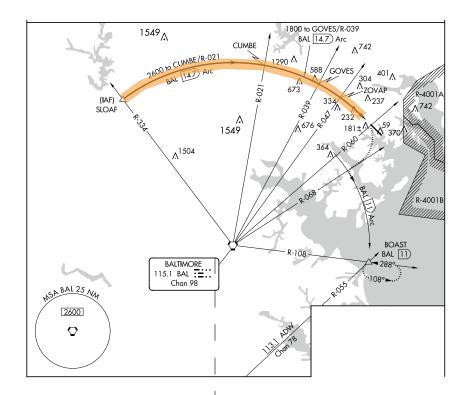

• **Visual segment** - Instrument approach procedures, including Copter approach procedures, that terminate or have missed approaches prior to the airport/heliport, and are authorized to proceed visually, will depict the visual flight path by a dashed line symbol from the missed approach point to the airport.


On RNAV charts where the visual track may only apply to a specific line of minima, the visual procedure track line will not be shown in the planview. There will be a note directed to that portion of the procedure track.

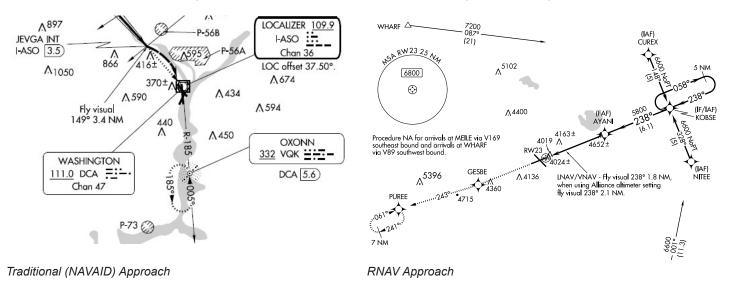

NAVAIDs

NAVAIDs used on ground based charts will show the appropriate symbol accompanied by a data box that contains the facility name, frequency, identifier and Morse code. A NAVAID box with a heavy line indicates the primary NAVAID used for the approach.

NAVAIDs used on GPS based charts show the appropriate symbol identified with the name and identifier.

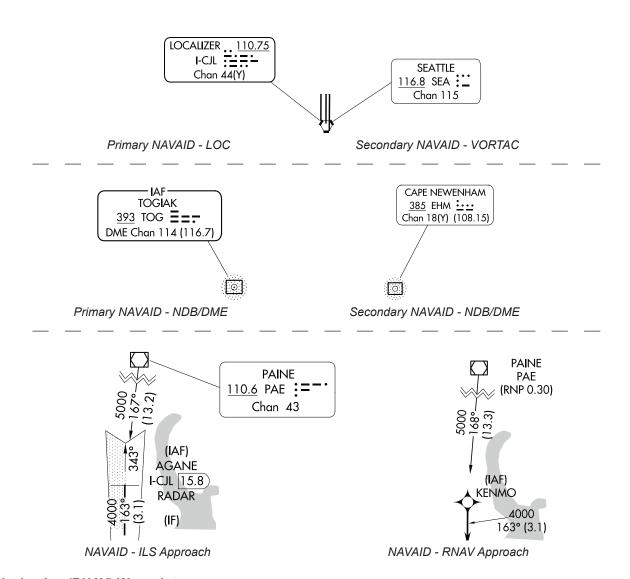

Area Navigation (RNAV) Waypoints

Waypoints are shown with the waypoint symbol accompanied by the five letter identifier. If an RNAV waypoint is collocated with an intersection, DME fix, or NAVAID, the appropriate Intersection, DME fix, or NAVAID symbol will be charted.



On RNAV (RNP) charts, any requirement/capability notes are depicted below the fix/waypoint/NAVAID name. When the required RNP lateral accuracy value for any approach segment other than final approach (e.g. feeder, initial and/or intermediate or missed) are less than standard (RNP 2.00 for feeder, RNP 1.00 for initial and/or intermediate and missed), a note stating the required RNP value may be placed adjacent to the applicable fix at the beginning of the Feeder Route (or annotated in the PBN box). If there is more than one lateral accuracy value within these portions of the procedure, the lowest value is annotated. These notes will take the form "RNP 0.XX, or Min RNP 0.XX" and will be located in close proximity to the relevant fix name (or be identified in the PBN Box).



Localizer Depiction

The localizer is depicted in the Planview using the following symbol. The size of the charted localizer symbol does not serve as an indication of the service volume.

Restrictive Airspeed

Restrictive airspeeds are shown paired with their respective fix/facility.

Туре	Description	Example
Recommended Speed	Recommended speed is depicted with no lines above or below it	180K
Minimum Speed	Minimum speed is depicted as a number with a line below it	120K
Maximum Speed	Maximum speed is depicted as a number with a line above it	250K
Mandatory Speed	Mandatory speed is depicted as a number with a line above and below it	175K

Altitudes

Restrictive altitudes are shown paired with their respective fix/ facility. Minimum, Maximum, Mandatory and Recommended Altitudes are shown.

Туре	Description	Example
Recommended Altitude	Recommended altitude is depicted with no lines above or below it	3000
Minimum Altitude	Minimum altitude is depicted as a number with a line below it	2500
Maximum Altitude	Maximum altitude is depicted as a number with a line above it	4300
Mandatory Altitude	Mandatory altitude is depicted as a number with a line above and below it	5500
Mandatory Block	Mandatory block altitude is depicted with a minimum and a maximum altitude.	5000
Altitude		3000

Altitudes that are shown along a route are minimum altitudes.

Holding Patterns and Procedure Turns

Holding Patterns are used for many reasons, including deteriorating weather or high traffic volume. Holding might also be required following a missed approach. Each holding pattern has a fix, a direction to hold from the fix, and an airway, bearing, course, radial, or route on which the aircraft is to hold. These elements, along with the direction of the turns, define the holding pattern. Holding Patterns may not always be depicted to scale.




If a holding pattern has a non-standard speed restriction, it will be depicted by an icon with the limiting air speed shown inside the holding pattern symbol. These elements, along with the direction of the turns, define the holding pattern. If two types of holds are located at the same point, the procedural holding pattern will be shown in-lieu of arrival or missed approach holding patterns. Timing or distance limits for Hold-in-lieu of Procedure Turn Holding Patterns will be shown.

Waypoints designated as a holding fix are shown as fly-by, without the circle around the symbol. However, in the event the holding fix/waypoint is also designated in all other parts of the procedure unrelated to holding with a fly-over function, then the holding fix/waypoint will be charted as a fly-over point.

A procedure turn (PT) is the maneuver prescribed to perform a course reversal to establish the aircraft inbound on an intermediate or final approach course. The procedure turn or hold-in-lieu-of procedure turn is a required maneuver when it is depicted on the approach chart. However, the procedure turn or the hold-in-lieu-of PT is not permitted when the symbol "NoPT" is depicted on the initial segment being flown, when a RADAR VECTOR to the final approach course is provided, or when conducting a timed approach from a holding fix. The procedure turn will be shown in the planview and in the profile of the chart. In the planview, the tip of the procedure turn barb is shown at the procedure turn limit, e.g., 10 NM, 15 NM. Users should be aware that it is possible for there to be a terminal/feeder fix along the procedure track that is not associated with the procedure turn. Fixes associated with the procedure turn are depicted in the profile.

Airports

The primary approach airport is shown to scale by a pattern of all the runways. Airports other than the primary approach airport may be shown with an airport pattern and name when in close proximity to the primary airport.

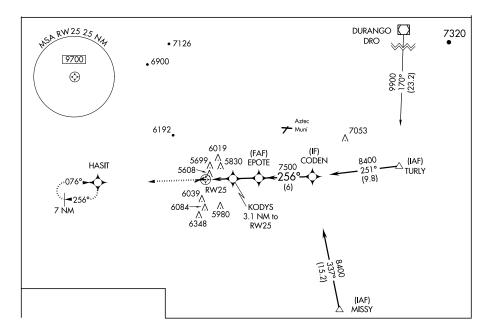


Relief (Terrain Features)

Terrain is depicted in the planview portion of all IAPs at airports that meet the following criteria:

- If the terrain within the planview exceeds 4,000 feet above the airport elevation, or
- If the terrain within a 6.0 nautical mile radius of the Airport Reference Point (ARP) rises to at least 2,000 feet above the airport elevation.

When an airport meets either of the above criteria, terrain will be charted by gradient tints of brown on all IAPs for that airport. Contour layers will be shown in no more than five brown tints, with consecutively darker tints used for consecutively higher elevation contour layers.

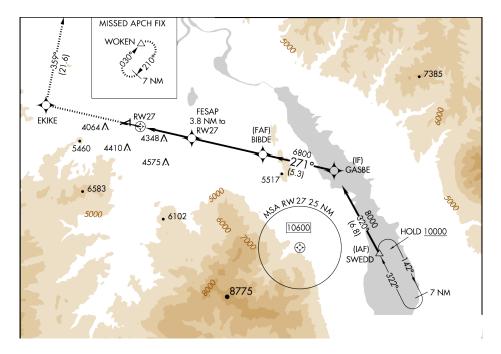


Hydrography (Water)

Water Depiction is depicted in grey, in the planview portion of IAPs. See previous example. The following hydrographic features are shown:

- Oceans
- Significant rivers and streams
- Significant lakes If only one river or one small lake is involved, not located in the immediate airport vicinity, the hydrographic information requirement may be waived.

International Boundary

When the planview includes a boundary of another country the International boundaries are shown by a dashed line. International boundaries are identified with country name within the country area.

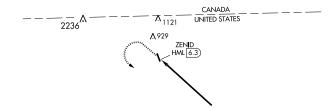


Obstacles (Man-made, Terrain and Vegetation)

Obstacles are shown as Λ when they are man-made or vegetation or as a • when they are terrain. The highest obstacle, whether man-made or terrain is depicted with a bolder and larger symbol along with larger elevation font size. Any obstacle that penetrates a slope of 67:1 emanating from any point along the centerline of any runway shall be considered for charting within the area shown to scale. Obstacles specifically identified by the approving authority for charting shall be charted regardless of the 67:1 requirement.


Unverified obstacles shall be indicated by a doubtful accuracy symbol \pm following the elevation value.

On non-precision approaches, obstacles should be considered when determining where to begin descent from the MDA.

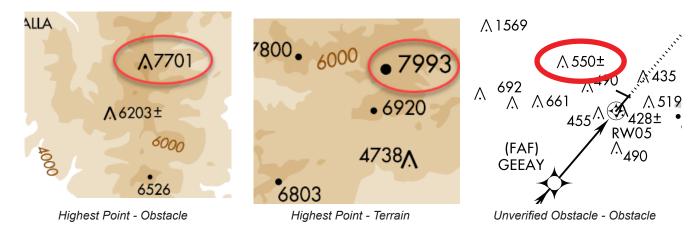

Special Use Airspace (SUA)

SUAs consists of that airspace wherein activities must be confined because of their nature, or wherein limitations are imposed upon aircraft operations that are not a part of those activities, or both. These are prohibited areas, restricted areas, warning areas, Military Operations Areas (MOAs), and alert areas. SUA that falls within the area of coverage of the instrument approach procedure chart are shown only when designated by the approving authority.




Air Defense Identification Zone (ADIZ)

ADIZ is an area of airspace in which the identification, location, and control of aircraft is required in the interest of national security. When designated by the approving authority, ADIZ boundaries that fall within the area of coverage of the chart are shown.


Minimum Safe Altitude (MSA)

MSAs are published for emergency use on IAP charts. MSAs appear in the planview of all IAPs except on approaches for which a Terminal Arrival Area (TAA) is used. The MSA is based on the primary NAVAID, waypoint, or airport reference point on which the IAP is predicated. The MSA depiction on the approach chart contains the identifier of the NAVAID/waypoint/airport used to determine the MSA altitudes. MSAs are expressed in feet above mean sea level and normally have a 25 NM radius; however, this radius may be expanded to 30 NM if necessary to encompass the airport landing surfaces. Ideally, a single sector altitude is established and depicted on the planview of approach charts; however, when necessary to obtain relief from obstructions, the area may be further sectored and as many as four MSAs established. When established, sectors may be no less than 90° in spread. MSAs provide 1,000 feet clearance over all obstructions but do not necessarily assure acceptable navigation signal coverage.

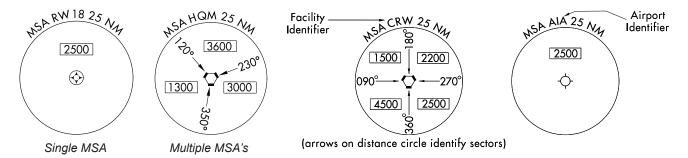


Terminal Arrival Areas (TAAs)

The TAA icons will be positioned in the planview relative to their relationship to the procedure. The icon will not have feeder routes, airways, or radar vectors depicted. The TAA provides a transition from the enroute structure to the terminal environment with little required pilot/air traffic control interface for aircraft equipped with Area Navigation (RNAV) systems. A standard TAA has three areas: straight-in, left base, and right base. The arc boundaries of the three areas of the TAA are published portions of the approach. A TAA provides minimum altitudes with standard obstacle clearance when operating within the TAA boundaries. TAAs are primarily used on RNAV approaches but may be used on an ILS approach when RNAV is the sole means for navigation to the IF; however, they are not normally used in areas of heavy concentration of air traffic.

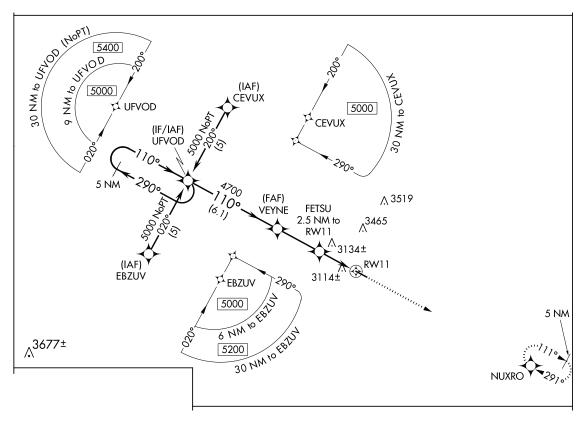

Example of Standard TAA

Non-standard TAAs may also be published; i.e., one base leg, no base legs.

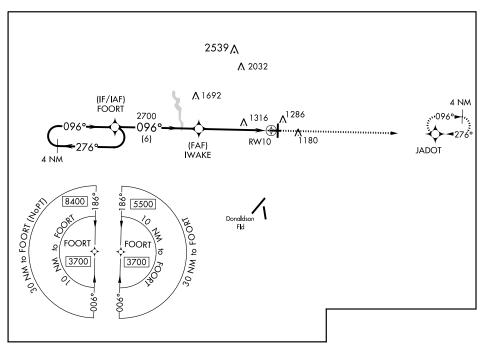


Example of Non-Standard TAA

Helicopter (Copter) Procedures

Copter procedures may contain either a visual or a VFR segment. Visual segments are depicted using the dashed line symbol below.


Visual Flight Segment

VFR Segments are not depicted with a line, but include the reference bearing and distance information at the endpoint of the VFR Segment, when provided, as shown below.

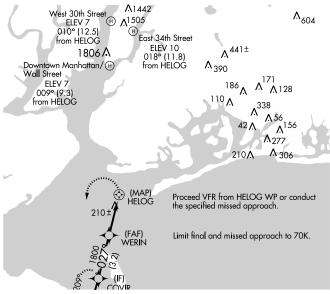

Example of Copter with VFR Segment (JFK)

When a visual flight path or VFR segment is required from the MAP to the heliport or alighting area, and as necessary for an explicit portrayal, an inset of the MAP area may be provided. This MAP area will depict significant landmark visual features. The procedure track, value and distance to the MAP and the visual segment and value to the landing point shall be shown within this inset. If it is a VFR segment, the reference bearing and distance text will be shown at the landing point.

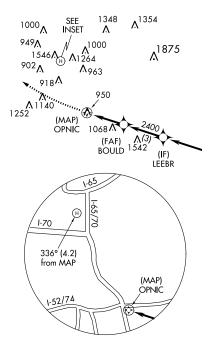

Example of Copter with Inset


MISSED APPROACH INFORMATION

Missed approach information is shown in 3 locations on the chart:

- The Middle Briefing Strip The complete textual missed approach instructions are provided at the top of the approach chart in the middle pilot briefing strip.
- The Planview The missed approach track is drawn using a thin, hash marked line with a directional arrow. If any
 portion of the missed approach procedure track is off the chart, the missed approach track shall extend to the
 chart border.



Missed approach holding patterns that lie outside the geographic parameters of the planview and are unable to be shown with a scale break will be shown as a boxed inset. All alternate missed approach holding patterns will be shown in an inset.

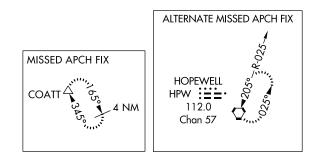


• The Profile Box - Missed Approach Icons will be depicted in the upper left or upper right of the profile box. The Missed Approach Icons are intended to provide quick, at a glance intuitive guidance to the pilot, to supplement the textual missed approach instructions in the briefing strip. Space permitting, all textual missed approach instructions will be graphically depicted in sequence. If space does not permit the depiction of all missed approach icons, only the first four icon boxes will be shown.

Example Missed Approach Icons	Missed Approach Text		
13000 TEKGU RKR WOKPA EKR 44.2	MISSED APPROACH: Climb to 13000 on RIL VOR/DME R-250 to TEKGU INT/RIL 19 DME and on EKR VOR/DME R-179 to WOKPA/EKR 44.2 DME and hold, continue climb-in-hold to 13000.		
8000 SVC Reverse Course Course	MISSED APPROACH: Climbing left turn to 8000 via SVC R-128, then reverse course to SVC VOR/DME and hold.		
9000 Tr JETRY Tr PAKPE WULKU Tr 289° MULKU Tr	MISSED APPROACH: Climb to 9000 on track 112° to JETRY, cross JETRY at or above 6700, and on track 112° to PAKPE, right turn to WULKU, and on track 289° to JNC VOR/DME and hold.		
14000 HOMDU 160° DEVEC 160° Tr C	MISSED APPROACH: Climb to 14000 via 174° course to HOMDU and via 160° track to DEVEC and 160° track to FTI VORTAC and hold.		
5800 10000 SVC KUNRE SVC R-193 △	MISSED APPROACH: Climb to 5800, then climbing left turn to 10000 via heading 190° and SVC VOR/DME R-193 to KUNRE INT/SVC VOR/DME 24.1 DME and hold.		


PROFILE VIEW

A profile diagram of the instrument approach procedure is shown below the planview. The published descent profile and graphical depiction of the vertical path using those facilities, intersections, fixes, etc. identified in the procedure to the runway are shown. A profile view of the procedure track is shown. The approach track begins toward the top of the primary facility line, unless otherwise dictated by the procedure, and shall descend to where the final approach ends and the missed approach begins.


When a reference mark (*, **, #, etc.) is shown in the profile, the qualifying footnote is provided within the profile section.

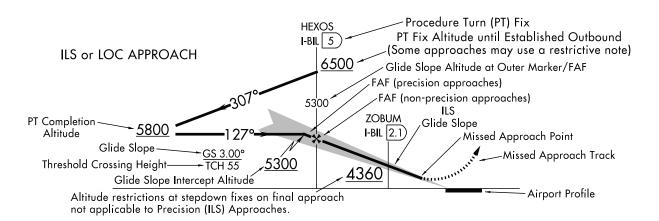

RNAV and GLS PROCEDURES WITH VERTICAL GUIDANCE

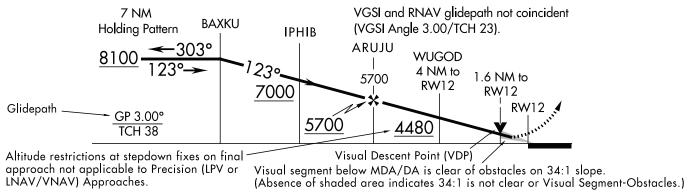


RNP APPROACH WITH TF AND RF SEGMENTS

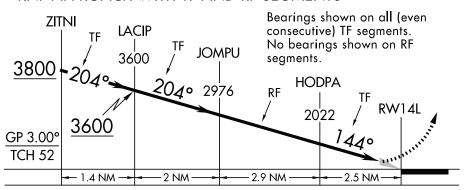


Precision Approaches

On precision approaches, the glideslope (GS) intercept altitude is illustrated by a zigzag line and an altitude. This is the minimum altitude for GS interception after completion of the procedure turn. Precision approach profiles also depict the GS angle of descent, threshold crossing height (TCH) and GS altitude at the outer marker (OM) or designated fix. The missed approach track is symbolized using the hatched line pattern. Where separate missed approach points exist for precision and non-precision approaches on the same chart, e.g., ILS and LOC, the track will be shown from the precision point only.

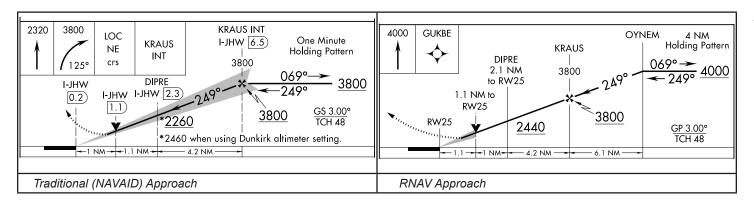


Non-Precision Approaches

On non-precision approaches, the final segment begins at the Final Approach Fix (FAF), which is identified with the Maltese cross symbol *. When no FAF is depicted, the final approach point is the point at which the aircraft is established inbound on the final approach course. Stepdown fixes may also be provided between the FAF and the airport for authorizing a lower minimum descent altitude (MDA) and are depicted with the fix or facility name and a dashed line. Altitude restrictions at stepdown fixes on the final approach on procedures with both precision and non-precision minima are not applicable to precision (ILS, LPV, or LNAV/VNAV) use of the approach. On non-precision only approach procedures, the approach track descends to the MDA or VDP point, thence horizontally to the missed approach point. The missed approach track on non-precision approaches is symbolized using the hatched line pattern and begins at the missed approach point.

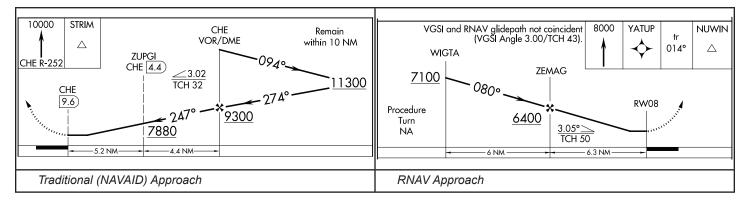

Visual Decent Point (VDP)

The Visual Descent Point (VDP), is shown by a bold letter "V" positioned above the procedure track and centered on the accompanying dashed line. (See example below.) The VDP is a defined point on the final approach course of a non-precision straight-in approach procedure from which normal descent from the MDA to the runway touchdown point may be commenced.

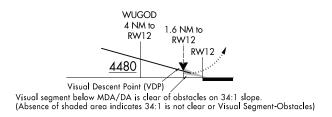

Vertical Descent Angle (VDA) and Threshold Crossing Heights (TCH)

A VDA and TCH may be published on non-precision approaches. For Copter approach procedures, a Heliport Crossing Height (HCH) will be depicted in place of the TCH. The VDA is strictly advisory and provides a means to establish a stabilized descent to the MDA. The presence of a VDA does not guarantee obstacle protection in the visual segment. If there are obstacles in the visual segment that could cause an aircraft to destabilize the approach between MDA and touchdown, the profile will not show a VDA and will instead show a note that states "Visual Segment-Obstacles".




Visual Flight Path

Instrument approach procedures, including Copter approach procedures, that terminate or have missed approaches prior to the airport, and are authorized to proceed visual, shall depict the visual segment by the dashed line symbol from the missed approach point to the airport. The note "Fly visual" ("Proceed visually" on Copter procedures) along with the bearing and distance shall be shown leadered to the visual flight path.


RNAV charts sometimes have visual flight for LNAV/VNAV minima that do not start at the missed approach point. An additional note indicating "LNAV/VNAV" will be placed above the note.

Copter approach procedures with a VFR segment from the missed approach point will not depict the VFR segment with a line in the profile. The note similar to "Proceed VFR from MAP" will be shown.



Copter VFR Segment

Chart Examples

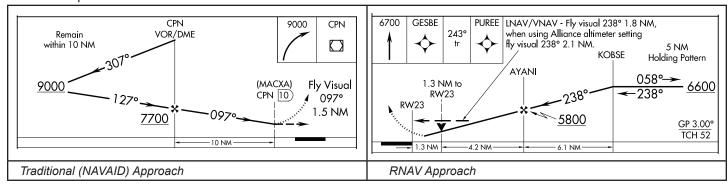

ILS Glide Slope and RNAV Glidepath

A note providing the glide slope (GS) or glidepath (GP) angle and the threshold crossing height (TCH), are positioned in the lower half of the profile box

- · GS will be shown on all ILS procedures.
- GP will be shown GLS procedures and all RNAV procedures with a published decision altitude


Threshold Crossing Height (TCH) has been traditionally used in "precision" approaches as the height of the glide slope above threshold. With publication of LNAV/VNAV minimums and RNAV descent angles, including graphically depicted descent profiles, TCH also applies to the height of the "descent angle," or glidepath, at the threshold.

34:1 Surface Clear Stipple Symbol

On RNAV approach charts, a small shaded arrowhead shaped symbol from the end of the VDA to the runway indicates that the 34:1 Obstacle Clearance Surface (OCS) for the visual segment is clear of obstacles. The absence of the symbol indicates that the 34:1 OCS is not clear or a Visual Segment-Obstacles note is indicated on the chart. (See example in VDP Section.)

Secondary Airports


Airports other than the airport of intended landing will be shown when requested and will be portrayed in the same manner as the primary airport. It will be placed in its approximate location along the final approach course.

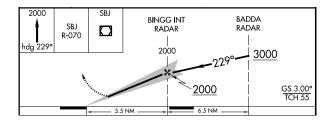

LANDING MINIMUMS

The landing minimums section is positioned directly below the profile. This section gives the pilot the lowest altitude and visibility requirements for the approach. There are two types of landing minimums: Straight-in landing or Circling. Straight-in landing minimums are the MDA and visibility, or DA and visibility, required for a straight-in landing on a specified runway. Circling minimums are the MDA and visibility required for the circle-to-land maneuver.

The minimums for straight-in and circling are located under each aircraft category. When there is not a division line between minimums for each category, the minimums apply to two or more categories.

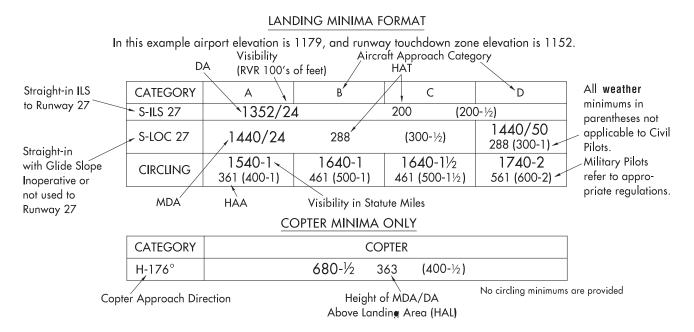

A second category of straight-in minimums called "sidestep" may be depicted where parallel runways exist.

CATEGORY	A	В	С	D	
S-ILS 24R	320/18 200 (200-1/2)				
S-LOC 24R	40	460/24 340 (400-1/2)			
SIDESTEP RWY 24L	58	580/50 459 (500-1)		580-1½ 459 (500-1½)	

The terms used to describe the minimum approach altitudes differ between precision and nonprecision approaches. Precision approaches use DA and nonprecision approaches use MDA, both expressed in feet MSL. The minimum approach altitudes are also referenced to height above touchdown elevation (HAT) for straight-in approaches, or height above airport (HAA) for circling approaches. The figures listed parenthetically are for military operations and are not used in civil aviation.


The visibility values are shown after the DA or MDA. They are provided in statue miles or runway visual range (RVR). RVR is reported in hundreds of feet. If the visibility is in statute miles, there is an altitude number, hyphen, whole or fractional number, e.g. 530-1. This indicates 530 feet MSL and 1 statute mile of visibility. The RVR value is separated from the minimum altitude with a slash, e.g., 1540/24. This indicates 1540 feet MSL and RVR of 2400 feet. When an RVR value is shown, the comparable statute mile equivalent is shown within the military minimums in parentheses as shown in the examples above. This value is determined from the Comparable Values of RVR and Visibility table located in the TPP Legend.


Comparable Values of RVR and Visibility

The following table shall be used for converting RVR to ground or flight visibility. For converting RVR values that fall between listed values, use the next higher RVR value; do not interpolate. For example, when converting 4800 RVR, use 5000 RVR with the resultant visibility of 1 mile.

RVR (feet)	Visibility (SM)						
1600	1/4	2400	1/2	3500	5/8	5500	1
1800	1/2	2600	1/2	4000	3/4	6000	11/4
2000	1/2	3000	5/8	4500	7/8		
2200	1/2	3200	5/8	5000	1		

When a reference mark (*, **, #, etc.) is shown on a line of minimums, the qualifying footnote is provided in the notes section.

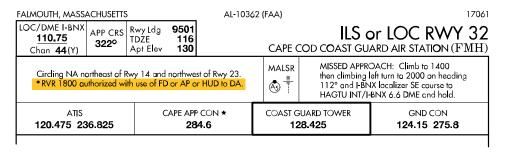

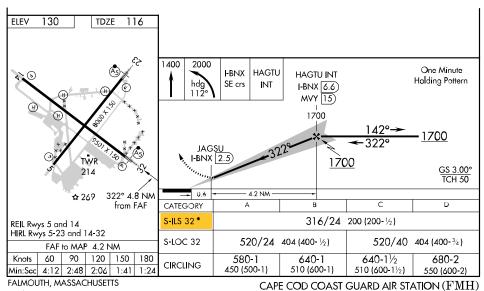

Circling Minimums

There was a change to the TERPS criteria in 2012 that affects circling area dimension by expanding the areas to provide improved obstacle protection. To indicate that the new criteria had been applied to a given procedure, a significant is placed on the circling line of minimums. The new circling tables and explanatory information is located in the Legend of the TPP.

The approaches using standard circling approach areas can be identified by the absence of the C on the circling line of minima.

_				
CATEGORY	Α	В	С	D
LPV DA		308/24 200 (200-1/2)		
LNAV/ DA	804-2 696 (700-2)			
LNAV MDA	800/24 6	92 (700-½)	800-11/2 692 (700-11/2)	
CIRCLING	800-1 6	87 (700-1)	800-2 687 (700-2)	860-2½ 747 (800-2½)

CATEGORY	Α	В	С	D
C CIRCLING	9120-1½ 1709 (1800-1½)	9120-1½ 1709 (1800-1½)	9260-3 1849 (1900-3)	NA


Apply Expanded Circling Approach Maneuvering Airspace Radius Table


Apply Standard Circling Approach Maneuvering Radius Table

AIRPORT SKETCH

The airport sketch is a depiction of the airport with emphasis on runway pattern and related information, positioned in either the lower left or lower right corner of the chart to aid pilot recognition of the airport from the air and to provide some information to aid on ground navigation of the airport. The runways are drawn to scale and oriented to true north. Runway dimensions (length and width) are shown for all active runways.

Runway(s) are depicted based on what type and construction of the runway.

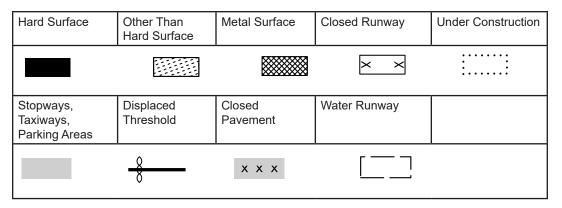

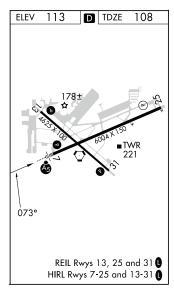

Taxiways and aprons are shaded grey. Other runway features that may be shown are runway numbers, runway dimensions, runway slope, arresting gear, and displaced threshold.

Other information concerning lighting, airport beacon, obstacles, control tower, NAVAIDs, and helipads may also be shown. The final approach course or an extension of the final approach course will be shown on all IAPs except ILS CAT II, ILS SA CAT I, ILS SA CAT II, and ILS SA CAT I & II.

Airport Elevation and Touchdown Zone Elevation

The airport elevation is shown enclosed within a box in the upper left corner of the sketch box and the touchdown zone elevation (TDZE) is shown in the upper right corner of the sketch box. The airport elevation is the highest point of an airport's usable runways measured in feet from mean sea level. The TDZE is the highest elevation in the first 3,000 feet of the landing surface. Circling only approaches will not show a TDZE.

Runway Declared Distance Information

Runway declared distance information when available will be indicated by **D** and is shown to the right of the airport elevation in the sketch box. Declared distances for a runway represent the maximum distances available and suitable for meeting takeoff and landing distance performance requirements.


Runway Lights

Notes regarding approach lighting systems are shown at the bottom of the sketch box. Runway lights (HIRL) (MIRL) (TDZL)(TDZ/CL) shall be indicated by a note, e.g. HIRL Rwy 9-27. Pilot capability to acitvate the airport lighting is shown using a symbol.

Other approach lighting is shown on the airport sketch as a symbol on the side of the runway where they are actually located. Symbols that are shown in negative indicate pilot-controlled lighting.

Runway centerline lights (CL) are installed on some precision approach runways to facilitate landing under adverse visibility conditions. They are located along the runway centerline and are spaced at 50 foot intervals. Runways with CL are shown in a negative dot pattern through the middle of the solid runway as illustrated in the airport sketch to right.

Runway centerline lights will be indicated by a note only when pilot controlled or when paired with TDZL, e.g., TDZ/CL Rwys 6 and 24.

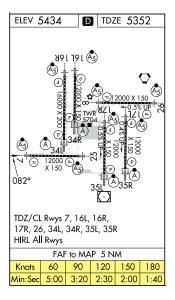

Time/Distance Table


When applicable, a Time/Distance Table is provided below the airport sketch. The table provides the distance and time that is required from the final approach fix to the missed approach point for select groundspeeds.

Base Information (Copter Approaches Only)

Base Information, as required and necessary to identify the MAP area and in the vicinity of the landing area shall be provided. Information shall be limited to and depict significant visual landmark features at and surrounding the MAP area and the heliport/pad of intended landing.

AIRPORT DIAGRAMS

Airport Diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/ taxiway configurations. Airport Diagrams are not intended for use in approach and landing or departure operations. An airport diagram assists pilots in identifying their location on the airport, thus reducing requests for "progressive taxi instructions" from controllers.

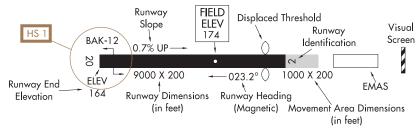


Airport Diagram Features:

1. Runways

- a. Complete with magnetic headings (including magnetic variation and epoch year) and identifiers.
- b. Runways under construction shall also be shown.
- c. Runway dimensions, displaced thresholds, runway end elevations.
- d. Runway surface composition
- e. Weight bearing capacity (landing gear configuration or Pavement Classification Number)
- f. Land and Hold Short (LAHSO) lines, ILS hold lines, Localizer/Glide Slope Critical Areas.
- g. Arresting Gear. To include Engineered Materials Arresting System (EMAS).
- Taxiways, with identifiers. Taxiways under construction shall also be shown.
- Hot Spot locations.
- Parking areas, run-up pads, alert areas, landing pads, "Non-Movement" areas (where pilot is NOT under air traffic control), ramps, aprons and hold pads.
- 5. Turnarounds and run-up areas.
- 6. Stopways, overruns, and blast pads.
- 7. Large tanks, including fueling area.
- 8. Control towers (include tower height).
- 9. Airport beacon.
- 10. Landing direction indicators.
- 11. Lighting.
- 12. Navigational Aids (NAVAIDs).
- 13. Helicopter pads.
- 14. Radar reflectors.
- 15. Highest obstruction within diagram boundary.
- 16. Any building that pilot can taxi to. Other buildings to include terminal/administration and Base operations, fire station, NWS, AFSS, FAA, FSDO, ANG, USCG, FBO.
- 17. Comm Frequencies.


Note: Star when used in the Comm Frequencies indicates part-time status. Check Chart Supplement for times of operation.

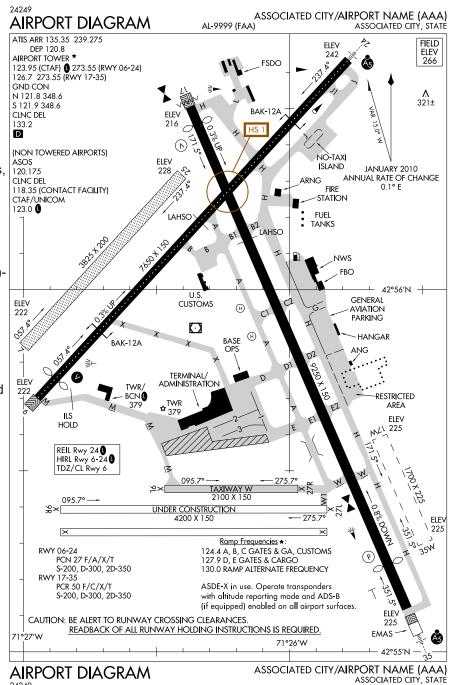

Runway Construction

Paved or hard surfaced runways consisting of concrete, asphalt, bitumen, or macadam are shown in solid color. Metal surfaced runways are shown using a solid color crosshatch pattern. Ultralight areas, ski landing areas, unpaved or runway other than hard surface, such as sod, clay, gravel, etc., is shown using a solid color dot pattern. Further details regarding runway surface and surface treatment can be found in the Chart Supplement.

Runway construction is depicted as follows:

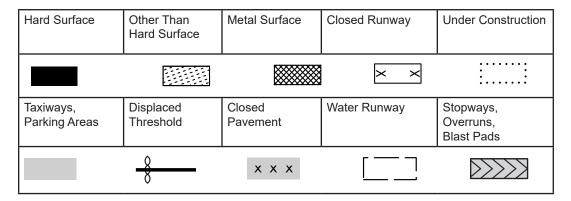

Hot Spots

Hot Spots (HS) are a runway safety related problem area or intersection on an airport. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. A confusing condition may be compounded by a miscommunication between a controller and a pilot, and may cause an aircraft separation standard to be compromised. The area may have a history of surface incidents or the potential for surface incidents.

Hot Spots are indicated on the Airport Diagram with a brown open circle or ellipse leadered to a Hot Spot number, e.g., HS 1. The number corresponds to a listing and description on the Hot Spot page in the front the TPP. More information and the location of Hot Spots can be found at http://www.faa.gov/airports/runway_safety/hotspots/hotspots_list/.

DEPARTURE PROCEDURES (DPs)

Departure Procedures (DPs) are designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR takeoff minimums other than standard. There are two types of DPs: Obstacle Departure Procedures (ODPs), printed either textually or graphically and Standard Instrument Departures (SIDs), always printed graphically. SIDs are primarily designed for system enhancement and to reduce pilot/controller workload, and require ATC clearance. ODPs provide obstruction clearance via the least onerous route from the terminal area and may be flown without ATC clearance. All DPs provide the pilot with a safe departure from the airport and transition to the enroute structure.

Generally, DP charts are depicted "not to scale" due to the great distances involved on some procedures or route segments. A "to scale" portrayal may be used if readability is assured.

The DP will show the departure routing, including transitions to the appropriate enroute structure. All routes, turns, altitudes, NAVAIDs, facilities forming intersections and fixes, and those facilities terminating the departure route are shown. A textual description of the departure procedure is also provided. For RNAV DPs, the transition text consists of the transition name and associated computer code. On non-RNAV DPs, the transition text will also include the description of all turns, altitudes, radials, bearings and facilities/fixes needed to guide the user from the common departure point to the terminating facility fix.

Copter DPs may also include a visual or VFR segment. Visual segments are depicted using the dashed line symbol below.

Visual Flight Segment

VFR Segments are not depicted with a line, but include the reference bearing and distance information at the endpoint of the VFR Segment, when provided, as shown below.

JORBA 1000 038° (8.7) from JRA

(H)

Example of Copter with VFR Segment

STANDARD TERMINAL ARRIVAL (STARs) CHARTS

STARs are pre-planned Instrument Flight Rule (IFR) air traffic control arrival procedures for pilot use in graphic and/or textual form. STARs depict prescribed routes to transition the aircraft from the enroute structure to a fix in the terminal area from which an instrument approach can be conducted. STARs reduce pilot/controller workload and air-ground communications, minimizing error potential in delivery and receipt of clearances.

STAR charts generally shall be depicted 'not to scale' due to the great distances involved on many procedures and route segments. A 'to scale' depiction may be used only if readability is assured.

The STAR will show the arrival routing, including transitions from the appropriate enroute structure. All routes, turns, altitudes, NAVAIDs, facilities forming intersections and fixes, and those facilities/fixes terminating or beginning the arrival route shall be shown in the graphic depiction. A textual description of the arrival procedure is also provided. For RNAV STARs, transition text will consist of the transition name and associated computer code. For non-RNAV STARs, the transition text will also include a description of all turns, altitudes, radials, bearings and facilities/fixes needed to guide the user from the entry point to the common facility/fix.

CHARTED VISUAL FLIGHT PROCEDURE (CVFP) CHARTS

CVFPs are charted visual approaches established for environmental/noise considerations, and/or when necessary for the safety and efficiency of air traffic operations. The approach charts depict prominent landmarks, courses, and recommended altitudes to specific runways. CVFPs are designed to be used primarily for turbojet aircraft. CVFPs are not instrument approaches and do not have missed approach segments.

CVFPs are named for the primary landmark and the specific runway for which the procedure is developed, such as: RIVER VISUAL RWY 18, STADIUM VISUAL RWY 24. The CVFP charts are divided into planview and notes sections separated by a bar scale in 1 NM increments. The planview of the CVFP includes the portrayal of visual approach procedures information, such as landmarks, NAVAIDs, visual track, hydrography, special use airspace and cultural features, as applicable.


CVFPs originate at or near, and are designed around, prominent visual landmarks and typically do not extend beyond 15 flight path miles from the landing runway. Visual tracks start at a geographical point or landmark where the procedure must be flown visually to the airport. The visual track is indicated by a dashed line. Visual tracks may include the track value, distance and minimum or recommended altitudes.


U.S. TERMINAL PROCEDURES PUBLICATION SYMBOLS

GENERAL INFORMATION

Symbols shown are for the Terminal Procedures Publication (TPP), which includes Standard Terminal Arrival (STARs) Charts, Departure Procedures (DPs), Instrument Approach Procedures (IAP) and Airport Diagrams.

PLANVIEW SYMBOLS

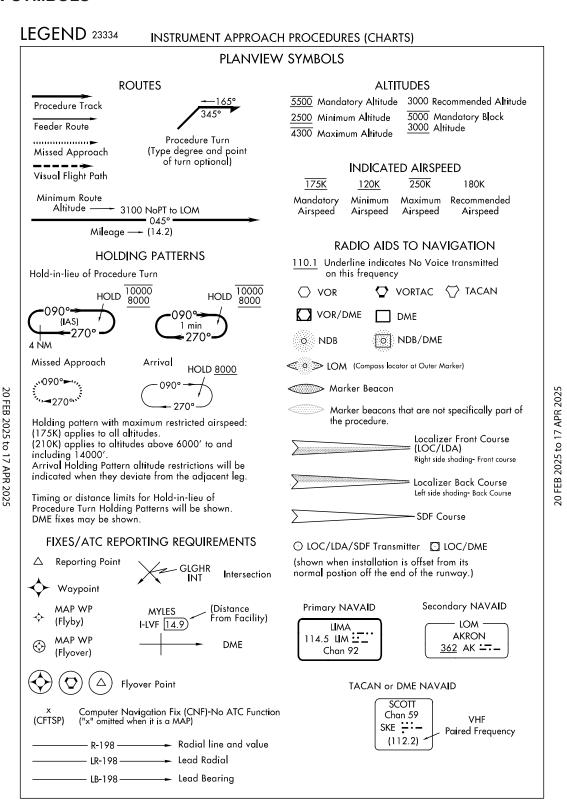

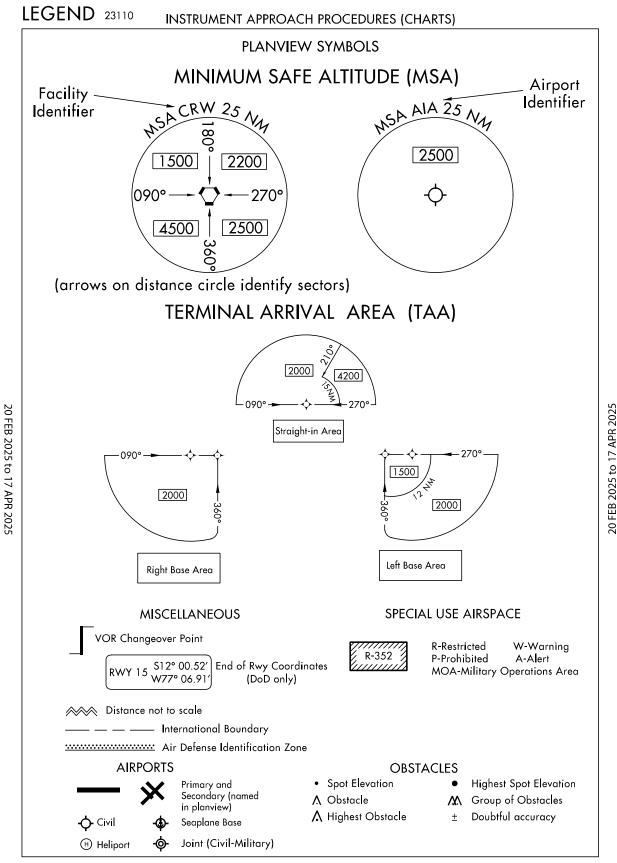

20 FEB 2025 to 17 APR 2025

LEGEND 24361

INSTRUMENT APPROACH PROCEDURES (CHARTS)


PROFILE VIEW

Three different methods are used to depict either electronic or vertical guidance: "GS", "GP", or "VDA".

1. "GS" indicates that an Instrument Landing System (ILS) electronic glide slope (a ground antenna) provides vertical guidance. The profile section of ILS procedures depict a GS angle and TCH in the following format: GS 3.00°.


TCH 55

- 2. "GP" on GLS and RNAV procedures indicates that either electronic vertical guidance (via Wide Area Augmentation System WAAS or Ground Based Augmentation System GBAS) or barometric vertical guidance is provided. GLS and RNAV procedures with a published decision altitude (DA/H) depict a GP angle and TCH in the following format: GP 3.00°.
- 3. An advisory vertical descent angle (VDA) is provided on non-vertically guided conventional procedures and RNAV procedures with only a minimum descent altitude (MDA) to assist in preventing controlled flight into terrain. On Civil (FAA) procedures, this information is placed above or below the procedure track following the fix it is based on. Absence of a VDA or a note that the VDA is not authorized indicates that the prescribed obstacle clearance surface is not clear and the VDA must not be used below MDA. VDA is depicted in the following format: $\frac{\sqrt{3.00^{\circ}}}{\text{TCH 55}}.$ On Copter procedures this is depicted in the following format: $\frac{\sqrt{7.30^{\circ}}}{\text{TCH 20}}.$

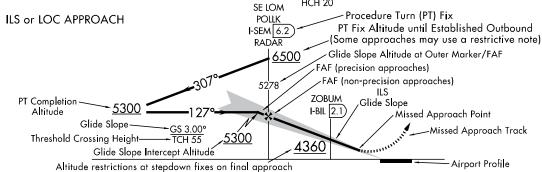


not applicable to Precision (ILS) Approaches.

RNAV and GLS PROCEDURES WITH VERTICAL GUIDANCE

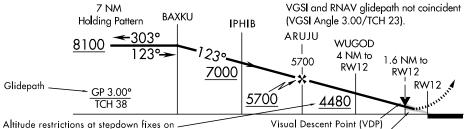


Altitude restrictions at stepdown tixes on - final approach not applicable to Precision (LPV or LNAV/VNAV) Approaches.


Visual segment below MDA/DA is clear of obstacles on 34:1 slope. (Absence of shaded area indicates 34:1 is not clear or Visual Segment - Obstacles.)

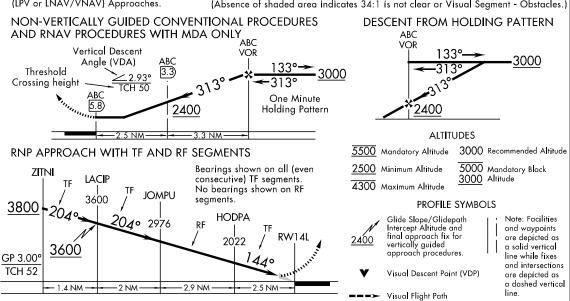

LEGEND 23334 STANDARD TERMINAL ARRIVAL (STAR) CHARTS

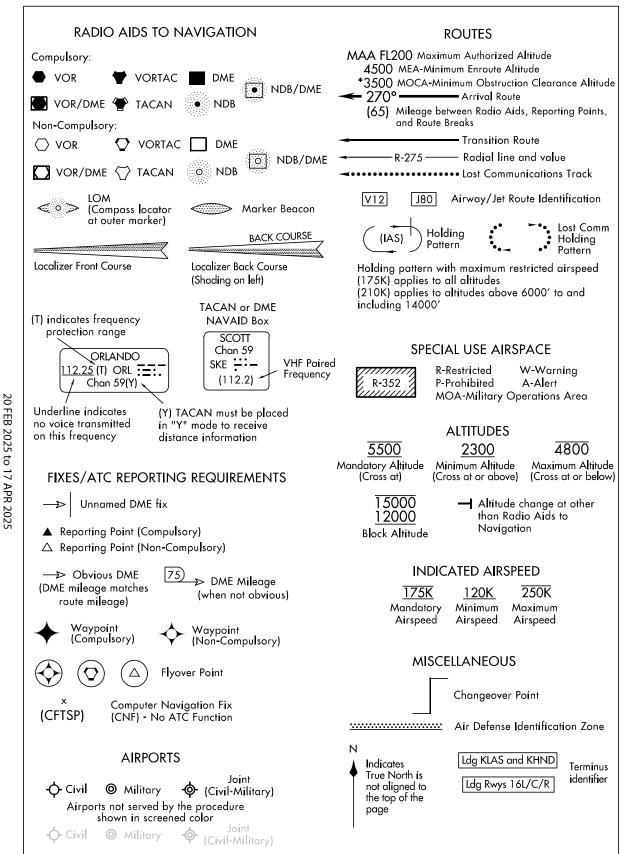

LEGEND 23334 DEPARTURE PROCEDURE (DP) CHARTS

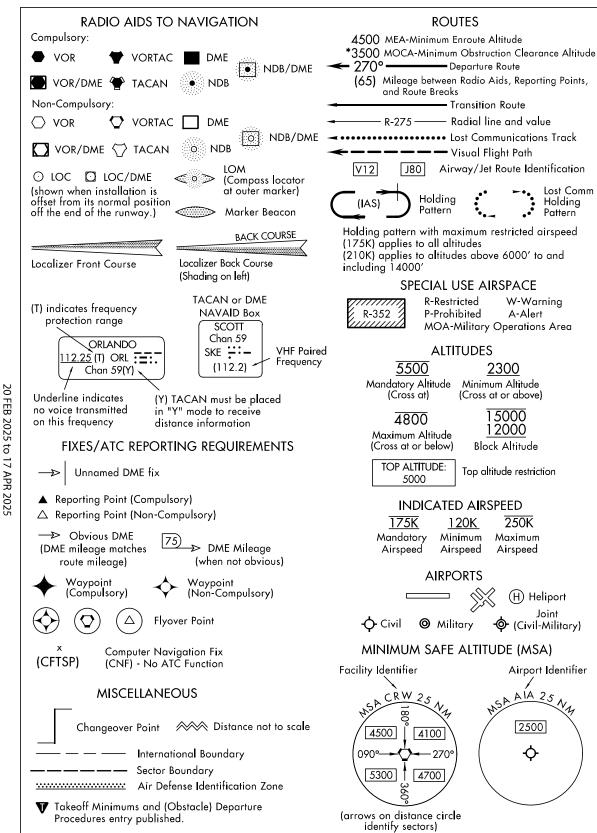

AIRPORT DIAGRAM/AIRPORT SKETCH

24249 LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH Runways Helicopter Alighting Areas (H) [+] [H] (A) [+] $\rangle\rangle\rangle\rangle\rangle$ *********** Hard Other Than Taxiways, Stopways, Meta Negative Symbols used to identify Copter Procedures Overruns, Hard Surface Parking Surface Surface landing point..... \mathbf{H} \mathbf{H} \mathbf{A} \mathbf{H} Areas Blast Pads ххх : : Landmark features depicted on Copter Approach insets Closed Closed Non-Under Water and sketches are provided for visual reference only. Surface Movement Construction Runway Runway TDZ elevation.....TDZE 123 ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to (shown when rounded runway slope is $\geq 0.3\%$) appropriate DOD publications. uni-directional bi-directional ∮ Jet Barrier Runway Slope measured to midpoint on runways 8000 feet or longer. ARRESTING SYSTEM (EMAS) U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of REFERENCE FEATURES approximately 7 feet and proximity to edge of Displaced Threshold..... runway may create an obstruction for some types Hot Spot of aircraft. Runway Holding Position Markings.....___ Approach light symbols are shown in the Buildings..... Flight Information Handbook. Tanks...... Airport diagram scales are variable. Obstructions....... True/magnetic North orientation may vary from Airport Beacon #...... ☆ ② diagram to diagram Runway Radar Reflectors. Bridges. Control Tower #. TWR Coordinate values are shown in 1 or ½ minute increments. They are further broken down into 6 second ticks, within each 1 minute increments. Wind Cone..... Positional accuracy within ± 600 feet unless otherwise Landing Tee..... noted on the chart. Tetrahedron..... Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds # When Control Tower and Rotating Beacon are if any) but excluding areas designated as stopways. co-located, Beacon symbol will be used and A D symbol is shown to indicate runway declared further identified as TWR. distance information available, see appropriate Chart ## See appropriate Chart Supplement for Supplement for distance information. information. NOTE: Runway Weight Bearing Capacity or Pavement All new and revised airport diagrams are shown refer-Classification Number (PCN)/Pavement Classification enced to the World Geodetic System (WGS) (noted on Rating (PCR) is shown as a codified expression. Refer appropriate diagram), and may not be compatible to the appropriate Supplement/Directory for applicable with local coordinates published in DoD FLIP. codes e.g., RWY 14-32 PCR 560 R/B/W/T; S-75, (Foreign Only) D-185, 2D-325, 2D/2D2-1120 The airport sketch box includes the final approach course or final approach course extended. **FIELD** Runway Slope **ELEV** Displaced Threshold Visua Runway HS 1 174 Screen Identification 0.7% UP 9000 X 200 1000 X 200 -023.2°() ELEÝ Runway End **EMAS** Runway Heading (Magnetic) Elevation 164 Runway Dimensions (in feet) Movement Area Dimensions (in feet) **SCOPE**

20 FEB 2025 to 17 APR 2025

LEGEND


Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations. Airport diagrams are not intended to be used for approach and landing or departure

operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

FAA Chart Users' Guide - Terminal Procedures Publication (TPP) - Symbols

LEGEND 22195

INSTRUMENT APPROACH PROCEDURES (CHARTS) APPROACH LIGHTING SYSTEM - UNITED STATES

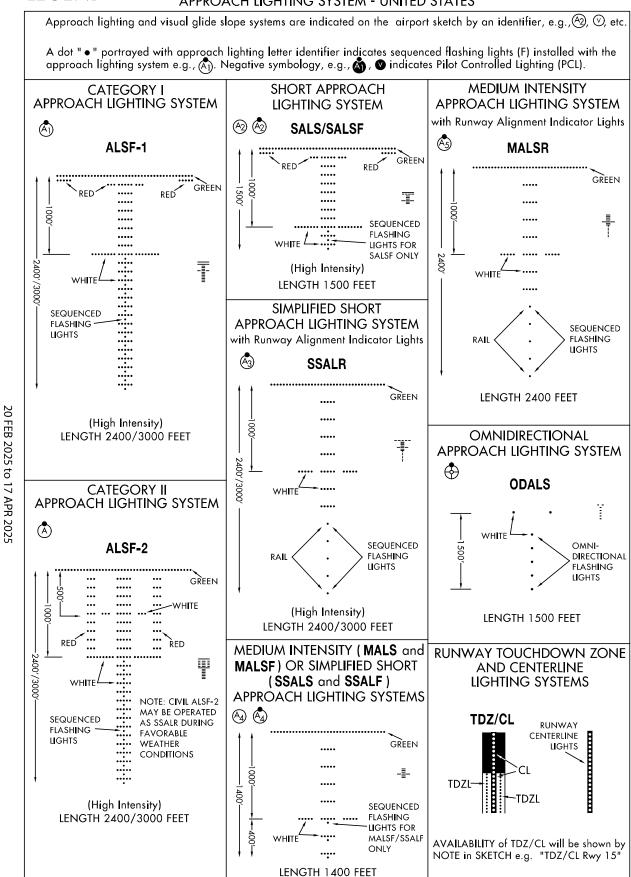


APPROACH LIGHTING SYSTEM (Continued)

LEGEND 22195

INSTRUMENT APPROACH PROCEDURES (CHARTS) APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, 🕙 , 💟 etc.

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., ♠, Negative symbology, e.g., ♠, o indicates Pilot Controlled Lighting (PCL).



VISUAL APPROACH SLOPE INDICATOR


VASI

VISUAL APPROACH SLOPE INDICATOR
WITH STANDARD THRESHOLD CLEARANCE
PROVIDED.

ALL LIGHTS WHITE — — TOO HIGH

FAR LIGHTS RED — ON GLIDE SLOPE

ALL LIGHTS RED — TOO LOW







VISUAL APPROACH SLOPE INDICATOR

VASI

3-BAR, 6 OR 16 BOX, VISUAL APPROACH SLOPE INDICATOR THAT PROVIDES 2 GLIDE ANGLES AND 2 THRESHOLD CROSSING HEIGHTS.



PULSATING VISUAL APPROACH SLOPE INDICATOR

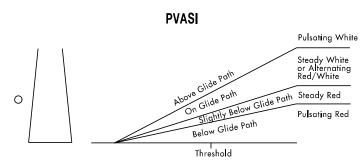


CAUTION: When viewing the pulsating visual approach slope indicators in the pulsating white or pulsating red sectors, it is possible to mistake this lighting aid for another aircraft or a ground vehicle. Pilots should exercise caution when using this type of system.

TRI-COLOR VISUAL APPROACH SLOPE INDICATOR TRCV Above Clide Path On Glide Path Red Amber Red Amber

CAUTION: When the aircraft descends from green to red, the pilot may see a dark amber color during the transition from green to red.

20 FEB 2025 to 17 APR 2025





Painted panels which may be lighted at night. To use the system the pilot positions the aircraft so the elements are in alignment.

REFERENCES

There are several references available from the FAA to aid pilots and other interest parties to learn more about FAA Charts and other aspects of aviation.

Publication		FAA Publication ID
AERONAUTICAL INFORMATION MANUAL	Aeronautical Information Manual (AIM) URL: http://www.faa.gov/air_traffic/publications/	
Airplane Hying Handbook	Airplane Flying Handbook URL: https://www.faa.gov/regulations_policies/handbooks_manuals/aviation/airplane_handbook/	FAA-H-8083-3A
Helicopter Flying Handbook	Helicopter Flying Handbook URL: http://www.faa.gov/regulations_policies/handbooks_manuals/aviation/helicopter_flying_handbook/	FAA-H-8083-21A
Instrument Procedures Handbook	Instrument Procedures Handbook URL: http://www.faa.gov/regulations_policies/handbooks_manuals/aviation/instrument_procedures_handbook/	FAA-H-8083-16B
Instrument Flying Handbook	Instrument Flying Handbook URL: https://www.faa.gov/sites/faa.gov/files/regulations_policies/handbooks_manuals/aviation/FAA-H-8083-15B.pdf	FAA-H-8083-15B
Pilat's Handbook of Aeronautical Knowledge	Pilot's Handbook of Aeronautical Knowledge URL: https://www.faa.gov/regulations_policies/handbooks_manuals/aviation/phak/	FAA-H-8083-25B
PAA-0-000 20 ***Commission Flori - Should **Commission Annual Systems Study Coxine August \$1750 Figure Students Systems **Transcription Students **Transcription Students	Remote Pilot - Small Unmanned Aircraft Systems Study Guide URL: https://www.faa.gov/sites/faa.gov/files/regulations_policies/handbooks_manuals/aviation/remote_pilot_study_guide.pdf	FAA-G-8082-22

ABBREVIATIONS

Α

AAF - Army Air Field

AAS - Airport Advisory Service

AAUP - Attention All Users Page

AC - Advisory Circular

ADF - Automatic Direction Finder

ADIZ - Air Defense Identification Zone

ADS - Automatic Dependent Surveillance

ADS-B - Automatic Dependent Surveillance-Broadcast

Advsry - Advisory

AFB - Air Force Base

AFIS - Automatic Flight Information Service

AFS - Air Force Station

AFSS - Automated Flight Service Station

AGL - Above Ground Level

AIM - Aeronautical Information Manual

AIRAC - Aeronautical Information Regulation And Control

AK - Alaska

AL - Approach and Landing

ANG - Air National Guard

APP - Approach

APP CON - Approach Control

APP CRS - Approach Course

Apt - Airport

APV - Approaches with Vertical Guidance

ARP - Airport Reference Point

ARTCC - Air Route Traffic Control Center

ASDA - Accelerate-Stop Distance Available

ASDE-X - Airport Surface Detection Equipment-Model X

ASOS - Automated Surface Observing Station

ASR - Airport Surveillance Radar

ATC - Air Traffic Control

ATIS - Automatic Terminal Information Service

ATS - Air Traffic Service

AUNICOM - Automated Aeronautical Advisory Station

AWOS - Automated Weather Observing Station

В

Baro-VNAV - Barometric Vertical Navigation

BS - Broadcast Station

_

CAC - Caribbean Aeronautical Chart

CAT - Category

CFA - Controlled Firing Areas

CFR - Code of Federal Regulations

CH - Channel

CL - Runway Centerline Lights

CLNC DEL - Clearance Delivery

CNF - Computer Navigation Fix

COP - Changeover Point

CPDLC - Controller Pilot Data Link Communication

CRS - Course

CT - Control Tower

CTAF - Common Traffic Advisory Frequency

CVFP - Charted Visual Flight Procedure

CZ - Control Zone (Canada)

D

DA - Decision Altitude

DA - Density Altitude

D-ATIS - Digital Automatic Terminal Information Service

DH - Decision Height

DME - Distance Measuring Equipment

DND - Department of National Defense (Canada)

DoD - Department of Defense

DOF - Digital Obstacle File

DP - Departure Procedure

DT - Daylight Savings Time

DVA - Diverse Vector Area

Ε

E - East

EFAS - Enroute Flight Advisory Service

EFB - Electronic Flight Bag

Elev - Elevation

EMAS - Engineered Materials Arresting System

F

FAA - Federal Aviation Administration

FAF - Final Approach Fix

FAP - Final Approach Point

FAR - Federal Aviation Regulation

FBO - Fixed-Based Operator

FIR - Flight Information Region

FL - Flight Level

FLIP - Flight Information Publication

FMS - Flight Management System

FREQ - Frequency

FRZ - Flight Restricted Zone

FSDO - Flight Standards District Office

FSS - Flight Service Station

G

GBAS - Ground-Based Augmentation System

GCO - Ground Communications Outlet

GLS - GBAS Landing System

GND - Ground

GND CON - Ground Control

GNSS - Global Navigation Satellite System

GP - Glide Path

GPS - Global Positioning System

GS - Glide Slope

GS - Ground Speed

MCA - Minimum Crossing Altitude

MCAS - Marine Corps Air Station MDA - Minimum Descent Altitude MDH - Minimum Descent Height

Н MEA - Minimum Enroute Altitude MEF - Maximum Elevation Figure MF - Medium Frequency HAA - Height Above Airport MIA - Minimum IFR Altitude HAR - High Altitude Redesign MIRL - Medium Intensity Runway Lights HAT - Height Above Touchdown HCH - Heliport Crossing Height MOA - Military Operations Areas MOCA - Minimum Obstruction Clearance Altitude HF - High Frequency MON - Minimum Operational Network HIRL - High Intensity Runway Lights MORA - Minimum Off-Route Altitude HS - Hot Spot MRA - Minimum Reception Altitude MSA - Minimum Safe Altitude ı MSL - Mean Sea Level MTA - Minimum Turning Altitude IAC - Interagency Air Committee MTR - Military Training Route IACC - Interagency Air Cartographic Committee MVA - Minimum Vector Altitude IAF - Initial Approach Fix IAP - Instrument Approach Procedure Ν ICAO - International Civil Aviation Authority IDT - Identifier N - North IF - Intermediate Fix N/A - Not Applicable IFR - Instrument Flight Rules NA - Not Authorized ILS - Instrument Landing System NAAS - Naval Auxiliary Air Station **IMC - Instrument Meteorological Conditions** INS - Inertial Navigation System NAS - Naval Air Station IR - Instrument Route (Military) NAS - National Airspace System NAV - Naval Air Facility IRU - Inertial Reference Unit NAVAID - Navigational Aid (Ground based) NDB - Non-Directional Radiobeacon J NextGen - Next Generation Air Transportation System NFDC - National Flight Data Center JO - Joint Order NFPO - National Flight Procedures Office NM - Nautical Mile K NOAA - National Oceanic and Atmospheric Administration NO A/G - No Air-to-Ground Communication KIAS - Knots NOTAM - Notice to Airmen NoPT - No Procedure Turn NPA - Non-Precision Approach NWS - National Weather Service LAA - Local Airport Advisory LAAS - Local Area Augmentation System 0 LAHSO - Land and Hold Short LDA - Landing Distance Available OAT - Outside Air Temperature LDA - Localizer-type Directional Aid **OBS - Omni Bearing Selector** Ldg - Landing OCA - Ocean Control Area LF - Low Frequency OCS - Obstacle Clearance Surface LIRL - Low Intensity Runway Lights ODP - Obstacle Departure Procedure LNAV - Lateral Navigation OM - Outer Marker LOC - Localizer OROCA - Off Route Obstruction Clearance Altitude LOM - Locator Outer Marker LPV - Localizer Performance with Vertical Guidance P LRRS - Long Range Radar Station LTP - Landing Threshold Point PA - Precision Approach PAR - Precision Approach Radar M PBN - Performance-Based Navigation PRM - Precision Runway Monitor MAA - Maximum Authorized Altitude PT - Procedure Turn MAP - Missed Approach Point PTP - Point-to-Point

Pvt - Private

R

R - Radial

R - Receive

R - Restricted Area (Special Use Airspace)

RCO - Remote Communications Outlet

RF - Radius-to-Fix

RNAV - Area Navigation

RNP - Required Navigation Performance

RNP AR - Required Navigation Performance Authorization Required

ROC - Required Obstacle Clearance

RP - Right Pattern

RVR - Runway Visual Range

RVSM - Reduced Vertical Separation Minimum

Rwy - Runway

S

S - South

SAAAR - Special Aircraft and Aircrew Authorization Required

SAAR - Special Aircraft and Aircrew Requirements

SATNAV - Satellite Navigation

SDF - Simplified Directional Facility

SER - Start End of Runway

SFAR - Special Flight Rules Area

SFC - Surface

SFRA - Special Flight Rules Area

SIAPs - Standard Instrument Approach Procedures

SID - Standard Instrument Departure

SM - Statute Mile

SMAR - Special Military Activity Routes

SMGCS - Surface Movement Guidance and Control System

SOIA - Simultaneous Offset Instrument Approaches

SSV - Standard Service Volume

STAR - Standard Terminal Arrival Procedure

SUA - Special Use Airspace

SVFR - Special Visual Flight Rules

Т

T - Transmit

TA - Travel Advisory

TAA - Terminal Arrival Area

TAC - Terminal Area Chart

TACAN - Tactical Air Navigation

TAS - True Air Speed

TCA - Terminal Control Areas (Canada)

TCH - Threshold Crossing Height

TDZ - Touchdown Zone

TDZE - Touchdown Zone Elevation

TDZL - Touchdown Zone Lights

TDZ/CL - Touchdown Zone/Centerline Lights

TERPS - U.S. Standard for Terminal Instrument Procedures

TFR - Temporary Flight Restriction

TIBS - Telephone Information Briefing Service

TIS-B - Traffic Information Service - Broadcast

TOC - Top of Climb

TOD - Top of Descent

TODA - Takeoff Distance Available

TOGA - Takeoff/Go Around

TORA - Takeoff Runway Available

TPP - Terminal Procedures Publication

TRSA - Terminal Radar Service Area

TWR - Tower

П

UC - Under Construction

UHF - Ultra High Frequency

UIR - Upper Information Region

UNICOM - Universal Communications

U.S. - United States

USA - United States Army

USAF - United States Air Force

USCG - United State Coast Guard

UTA - Upper Control Area

V

VCOA - Visual Climb Over Airport / Airfield

VDA - Vertical Descent Angle

VDP - Visual Decent Point

VFR - Visual Flight Rules

VGSI - Visual Glide Slope Indicator

VHF - Very High Frequency

VMC - Visual Meteorological Conditions

VNAV - Vertical Navigation

VOR - VHF Omnidirectional Radio Range

VORTAC - VHF Omnidirectional Radio Range/Tactical Air Navigation

VPA - Vertical Path Angle

VR - Visual Route (Military)

W

W - Warning Area (Special Use Airspace)

W - West

WAAS - Wide-Area Augmentation System

WAC - World Aeronautical Chart

WP - Waypoint

WX CAM - Weather Camera (Alaska)